

NASCC THE **STEEL** CONFERENCE

Introducing the 15th Edition *Steel Construction Manual*

PDH CODE: 71841

Committee on Manuals

Mission

Update and maintain AISC manuals and accompanying design examples in response to revisions in AISC standards and inquiries from within the Committee and the steel construction industry

Roster

28 Members (fabricators, connection designers, detailers, educators, consulting engrs.)

5 Emeritus Members



Steel Solutions Center

solutions@aisc.org

or

866.ASK.AISC (866.275.2472)

NASCC: THE STEEL CONFERENCE | 2017



Table of Contents

- Part 1. Dimensions and Properties
- Part 2. General Design Considerations
- Part 3. Design of Flexural Members
- Part 4. Design of Compression Members
- Part 5. Design of Tension Members
- Part 6. Design of Members Subject to Combined Forces

NASCC: THE STEEL CONFERENCE | 2017



Table of Contents (continued)

- Part 7. Design Considerations for Bolts
- Part 8. Design Considerations for Welds
- Part 9. Design of Connecting Elements
- Part 10. Design of Simple Shear Connections
- Part 11. Design of Partially Restrained Moment Connections
- Part 12. Design of Fully Restrained Moment Connections
- Part 13. Design of Bracing Connections and Truss Connections
- Part 14. Design of Beam Bearing Plates, Column Base Plates, Anchor Rods and Column Splices
- Part 15. Design of Hanger Connections, Bracket Plates, and Crane-Rail Connections

NASCC: THE STEEL CONFERENCE | 2017



Table of Contents (continued)

- Part 16. Standards
 - 2016 AISC *Specification for Structural Steel Buildings*
 - 2014 RCSC *Specification for Structural Joints Using High-Strength Bolts*
 - 2016 AISC *Code of Standard Practice for Steel Buildings & Bridges*
- Part 17. Misc. Data and Mathematical Information

NASCC: THE STEEL CONFERENCE | 2017



Part 1. Dimensions and Properties

- New shapes:
 - W-shapes (& corresponding WT-shapes)
 - HP-shape
 - Angles
 - HSS
 - Pipe

NASCC: THE STEEL CONFERENCE | 2017





Part 1. Dimensions and Properties


W-Shapes

W40x655
W36x925
W36x853
W36x802
W36x723
W21x275
W21x248
W21x223
W14x873
W14x808

& corresponding WT-shapes


HP-Shapes
HP12x89


Angles
L12x12x1-3/8
L12x12x1-1/4
L12x12x1-1/8
L12x12x1
L10x10x1-3/8
L10x10x1-1/4
L10x10x1-1/8
L10x10x1
L10x10x7/8
L10x10x3/4
& corresponding 2Ls

NASCC: THE STEEL CONFERENCE | 2017



Part 1. Dimensions and Properties



HSS22x22x7/8, 3/4
HSS20x20x7/8, 3/4, 5/8, 1/2
HSS18x18x7/8, 3/4, 5/8, 1/2
HSS16x16x7/8, 3/4
HSS14x14x7/8, 3/4
HSS16x16x7/8, 3/4
HSS14x14x7/8, 3/4
HSS12x12x3/4
HSS10x10x3/4



HSS24x12x3/4, 5/8, 1/2
HSS20x12x3/4
HSS16x12x3/4



Pipe 26, 24, 20, 18, 16, 14 (std and x-strong)
& Pipe 12, 10 (xx-strong)



Part 1. Dimensions and Properties

- New shapes
- Updated fillet radii $\longrightarrow k_{det}, k_1, T$ affected

Table 1-1
W-Shapes
Dimensions

Shape	Area, A	Depth, d	Web		Flange				Distance					Work- able Gage	
			Thickness, t_w	$\frac{t_w}{2}$	Width, b_f	Thickness, t_f			k	k_{def}	k_1	T			
	in. ²	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.		
W44x335 ^a	98.5	44.0	44	1.03	1	1/2	15.9	16	1.77	1 3/4	2.56	3	1 3/4	38	5 1/2
x290°	85.4	43.6	43 5/8	0.865	7/8	7/16	15.8	15 7/8	1.58	1 9/16	2.36	2 13/16	1 5/8		
x262°	77.2	43.3	43 3/4	0.785	13/16	7/16	15.8	15 3/4	1.42	1 7/16	2.20	2 5/8	1 5/8		
x230°	67.8	42.9	42 7/8	0.710	1 1/16	3/8	15.8	15 3/4	1.22	1 1/4	2.01	2 1/16	1 9/16		



Part 1. Dimensions and Properties

- New shapes
- Updated fillet radii
- Check material availability: See www.aisc.org
- V15.0 Database

NASCC: THE STEEL CONFERENCE | 2017



Part 2. General Design Considerations

- Table 2-4: Applicable ASTM Specifications for Various Structural Shapes
- Table 2-5: Applicable ASTM Specifications for Plate
- Table 2-7: Summary of Surface Preparation Standards

NASCC: THE STEEL CONFERENCE | 2017



Part 2. General Design Considerations

Table 2-4													
Applicable ASTM Specifications for Various Structural Shapes													
Steel Type	ASTM Designation	F _y Yield Stress ^a (ksi)	F _u Tensile Stress ^a (ksi)	Applicable Shape Series									
				W	M	S	HP	C	MC	L	HSS		
											Rect.	Round	Pipe
	A36	36	58–80 ^b										
	A53 Gr. B	35	60										
	A501	Gr. B	42	58									
			46	58									
		Gr. C	46	62									
			50	62									
		Gr. A	36	58									



Part 2. General Design Considerations

Steel Type	ASTM Designation	F _y Yield Stress ^a (ksi)	F _u Tensile Stress ^a (ksi)	Plates and Bars, in.										
				to 0.75 incl.	over 0.75 to 1.25 incl.	over 1.25 to 1.5 incl.	over 1.5 to 2 incl.	over 2 to 2.5 incl.	over 2.5 to 4 incl.	over 4 to 5 incl.	over 5 to 6 incl.	over 6 to 8 incl.	over 8	
Carbon	A36	32	58–80											
		36	58–80											
	A283 ^c	Gr. C	30	55–75					d					
		Gr. D	33	60–80					d					
	A529	Gr. 50	50	65–100		b	b	b	b	b				
		Gr. 55	55	70–100		c	c	c	c	c				
	A709	Gr. 36	36	58–80										
Alloy	A572	Gr. 42	42	60										
		Gr. 50	50	65										
		Gr. 55	55	70										
		Gr. 60	60	75										
		Gr. 65	65	80										



Part 3. Design of Flexural Members

- Footnote for noncompact sections:
“...tabulated values have been adjusted accordingly”
(also in Part 4 column tables)

NASCC: THE STEEL CONFERENCE | 2017



Part 3. Design of Flexural Members

- Footnote for noncompact or slender sections:
“...tabulated values have been adjusted accordingly”
- Table 3-19, Composite beam table footnote:
“ Ductility (slip capacity) of shear connection at the beam/concrete interface may control minimum ΣQ_n value per AISC Spec. Sect. I3.2d.”

NASCC: THE STEEL CONFERENCE | 2017



Part 4. Design of Compression Members

- Eliminated K factor in tables/discussion $\rightarrow L_c$
- Clarifies $C_w = 0$ is used in WT column tables
- Chapter E revisions reflected in tables
 - Slender members
 - Double angles use more general F_{cry} equation
- Removed Tables 4-13 to 4-20: Composite Columns
- W-shape column tables: added 65 and 70 ksi for some

NASCC: THE STEEL CONFERENCE | 2017



Part 4. Design of Compression Members

- W-shape column tables: added 65 and 70 ksi for some

Table 4-1b
Available Strength in Axial Compression, kips
W-Shapes

$F_y = 65$ ksi

W14

Shape	W14x							
	873 ^h		808 ^h		730 ^h		665 ^h	
lb/ft	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
0	10000	15000	9260	13900	8370	12600	7630	11500

Table 4-1c
Available Strength in Axial Compression, kips
W-Shapes

$F_y = 70$ ksi

W14

Shape	W14x							
	873 ^h		808 ^h		730 ^h		665 ^h	
lb/ft	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
0	10800	16200	9980	15000	9010	13500	8220	12300

NASCC: THE STEEL CONFERENCE | 2017



Part 6. Design of Members Subject to Combined Forces

- **New** Tables 6-1a & 6-1b: *Limiting Width-to-Thickness Ratios*

Table 6-1a								
Width-to-Thickness Ratios:								
Compression Elements								
Members Subject to Axial Compression								
	Case	Description of Element	Width-to-Thickness Ratio	F_y , ksi				
				32	36	42	46	50
				λ_r	λ_r	λ_r	λ_r	λ_r
Elements	1	Flanges of rolled I-shaped sections, plates projecting from rolled I-shaped sections, outstanding legs of pairs of angles connected with continuous contact, flanges of channels, and flanges of tees	b/t	—	15.9	14.7	—	13.5
		Flanges of built-up I-shaped sections						

Consistent with Spec. Tables B4.1a and B4.1b

NASCC: THE STEEL CONFERENCE | 2017



Part 6. Design of Members Subject to Combined Forces

- New Tables 6-1a & 6-1b: *Limiting Width-to-Thickness Ratios*
- **New** Table 6-2: *Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces, W-Shapes*

NASCC: THE STEEL CONFERENCE | 2017



The Super Table

Table 6-2

Available Strength for Members


Subject to Axial, Shear,

Flexural and Combined Forces

W-Shapes

$F_y = 50$ ksi

$F_u = 65$ ksi



W44<						Shape	W44<											
335°			290°			262°			lb/ft	335			290			262		
P_u/L_c	$\phi_t P_u$	P_u/L_c	$\phi_t P_u$	P_u/L_c	$\phi_t P_u$		M_{ux}/L_b	$\phi_b M_{ux}$	M_{ux}/L_b	$\phi_b M_{ux}$	M_{ux}/L_b	$\phi_b M_{ux}$	M_{ux}/L_b	$\phi_b M_{ux}$	M_{ux}/L_b	$\phi_b M_{ux}$		
Available Compressive Strength, kips																		
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
2000	4390	2400	3810	2110	3180		6	4040	6080	3520	5290	3170	4760					
2600	4260	2340	3620	2060	3090		8	4040	6080	3520	5290	3170	4760					
2800	4210	2320	3480	2040	3060		7	4040	6080	3520	5290	3170	4760					
2770	4160	2290	3440	2010	3030		8	4040	6080	3520	5290	3170	4760					
2730	4110	2260	3400	1980	2990		9	4040	6080	3520	5290	3170	4760					
2690	4060	2230	3350	1960	2950		10	4040	6080	3520	5290	3170	4760					
2650	3990	2200	3300	1930	2900		11	4040	6080	3520	5290	3170	4760					
2600	3910	2160	3240	1900	2850		12	4040	6080	3520	5290	3170	4760					
2550	3830	2120	3180	1860	2800		13	4000	6010	3480	5230	3130	4700					
2490	3740	2080	3120	1820	2740		14	3940	5930	3430	5150	3080	4620					
2430	3650	2030	3050	1780	2680		15	3880	5840	3370	5070	3020	4550					
2390	3550	1990	2990	1740	2620		16	3820	5750	3320	4980	2970	4470					
2300	3450	1940	2910	1700	2560		17	3760	5660	3260	4900	2920	4390					
2220	3350	1890	2840	1660	2490		18	3700	5570	3210	4820	2870	4310					
2160	3240	1840	2760	1610	2420		19	3640	5480	3150	4740	2810	4230					
2090	3140	1790	2680	1560	2350		20	3580	5390	3100	4650	2760	4150					
1940	2920	1670	2520	1470	2210		22	3470	5210	2980	4480	2660	3990					
1790	2690	1550	2340	1370	2060		24	3350	5030	2860	4320	2560	3840					
1640	2470	1430	2140	1270	1910		26	3230	4850	2770	4160	2460	3680					
1500	2250	1300	1950	1160	1750		28	3110	4670	2680	3990	2340	3520					
1350	2040	1170	1770	1050	1580		30	2990	4490	2590	3830	2240	3360					
1220	1830	1060	1590	944	1420		32	2870	4320	2440	3660	2130	3200					
1090	1630	939	1410	839	1260		34	2750	4140	2330	3500	2030	3050					
960	1430	838	1230	749	1120		36	2630	3960	2220	3320	1930	2810					
867	1300	752	1130	672	1010		38	2510	3780	2070	3110	1750	2630					
783	1180	679	1020	606	911		40	2390	3590	1920	2880	1620	2430					
710	1070	616	925	550	827		42	2280	3410	1780	2680	1500	2260					
647	972	561	843	501	751		44	2160	3230	1660	2500	1400	2100					
592	890	513	771	459	689		46	2040	3050	1550	2350	1310	1970					
544	817	471	708	421	633		48	1920	2870	1470	2210	1220	1850					
501	753	434	653	380	583		50	1790	2690	1390	2090	1160	1740					
Properties																		
Available Strength in Tension Yielding, kips						Limiting Unbraced Lengths, ft												
P_u/L_c	$\phi_t P_u$	P_u/L_c	$\phi_t P_u$	P_u/L_c	$\phi_t P_u$	L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r	
2050	4430	2560	3840	2110	3470	12.3	38.9	12.3	38.9	12.3	38.9	12.3	38.9	12.3	38.9	12.3	38.9	
Available Strength in Tension Rupture ($\phi_t = 0.75$), kips						Area, in. ²												
P_u/L_c	$\phi_t P_u$	P_u/L_c	$\phi_t P_u$	P_u/L_c	$\phi_t P_u$	98.5												
2430	3600	2090	3120	1880	2820	85.4												
Available Strength in Shear, kips						Moment of Inertia, in. ⁴												
V_u/L_c	$\phi_v V_u$	V_u/L_c	$\phi_v V_u$	V_u/L_c	$\phi_v V_u$	I_x	I_y	I_x	I_y	I_x	I_y	I_x	I_y	I_x	I_y	I_x	I_y	
900	1360	754	1120	600	1020	31100	1200	27000	1050	24100	925							
Available Strength in Flexure about Y-Y Axis, kip-ft						r_x , in.												
M_{ux}/L_b	$\phi_b M_{ux}$	M_{ux}/L_b	$\phi_b M_{ux}$	M_{ux}/L_b	$\phi_b M_{ux}$	3.49												
						r_y , in.												
						5.10												

* Shape is slender for compression with $F_y = 50$ ksi.



Example—Table 6-2

Given: W14x99, ASTM A992, pinned ends ($K = 1.0$),

$$L_{cx} = L_{cy} = L_b = 14 \text{ ft}$$

Check shape for combined loading using LRFD, with required strengths as follows:

LRFD

$$P_u = 400 \text{ kips}$$

$$M_{ux} = 250 \text{ kip-ft}$$

$$M_{uy} = 80.0 \text{ kip-ft}$$



Example— Table 6-2

Solution:

$$\phi_c P_n = 1130 \text{ kips}$$

$$\phi_b M_{nx} = 642 \text{ kip-ft}$$



Table 6-2 (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

W14

$F_y = 50 \text{ ksi}$
 $F_u = 65 \text{ ksi}$

W14x						Shape lb/ft	W14x					
109		99		90			109		99 [†]		90 [†]	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
913	1370	830	1250	755	1140	8	479	720	430	646	382	574
901	1350	819	1230	745	1120	9	479	720	430	646	382	574
888	1340	807	1210	735	1100	10	479	720	430	646	382	574
874	1310	794	1190	723	1090	11	479	720	430	646	382	574
859	1290	780	1170	710	1070	12	479	720	430	646	382	574
843	1270	766	1150	697	1050	13	479	720	430	646	382	574
826	1240	750	1130	682	1030	14	475	714	427	642	382	574
808	1210	733	1100	667	1000	15	470	706	422	635	382	574
789	1190	716	1080	652	979	16	465	699	417	627	378	568
770	1160	698	1050	635	955	17	460	691	413	620	373	560
750	1130	680	1020	618	929	18	455	684	408	613	368	553
729	1100	661	994	601	903	19	450	676	403	605	363	546
708	1060	642	964	583	877	20	445	669	398	598	358	539
664	998	602	904	547	822	22	435	654	388	583	349	524
620	931	561	843	509	766	24	425	639	378	569	339	510
574	863	519	781	472	709	26	415	623	369	554	329	495
529	796	478	719	434	653	28	405	608	359	539	320	481
485	729	438	658	397	597	30	395	593	349	524	310	466
441	663	398	598	361	543	32	385	578	339	510	300	452
399	600	360	541	326	490	34	375	563	329	495	291	437
359	539	323	485	292	439	36	365	548	320	480	281	423
322	484	290	435	262	394	38	355	533	310	466	271	408
290	437	261	393	237	356	40	345	518	300	451	262	394
263	396	237	356	215	323	42	335	503	290	436	252	379
240	361	216	325	196	294	44	325	488	280	422	239	359

Effective length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending

NASCC: THE STEEL CONFERENCE | 2017

Example—Table 6-2

Solution:

$$\phi_b M_{ny} = 311 \text{ kip-ft}$$



Table 6-2 (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

W14

$F_y = 50 \text{ ksi}$
 $F_u = 65 \text{ ksi}$

W14x						Shape lb/ft	W14x					
109		99		90			109		99 [†]		90 [†]	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
913	1370	830	1250	755	1140	8	479	720	430	646	382	574
901	1350	819	1230	745	1120	9	479	720	430	646	382	574
888	1340	807	1210	735	1100	10	479	720	430	646	382	574
874	1310	794	1190	723	1090	11	479	720	430	646	382	574
859	1290	780	1170	710	1070	12	479	720	430	646	382	574
843	1270	766	1150	697	1050	13	479	720	430	646	382	574
826	1240	750	1130	682	1030	14	475	714	427	642	382	574
808	1210	733	1100	667	1000	15	470	706	422	635	382	574
789	1190	716	1080	652	979	16	465	699	417	627	378	568
770	1160	698	1050	635	955	17	460	691	413	620	373	560
750	1130	680	1020	618	929	18	455	684	408	613	368	553
729	1100	661	994	601	903	19	450	676	403	605	363	546
708	1060	642	964	583	877	20	445	669	398	598	358	539
664	998	602	904	547	822	22	435	654	388	583	349	524
620	931	561	843	509	766	24	425	639	378	569	339	510
574	863	519	781	472	709	26	415	623	369	554	329	495
529	796	478	719	434	653	28	405	608	359	539	320	481
485	729	438	658	397	597	30	395	593	349	524	310	466
441	663	398	598	361	543	32	385	578	339	510	300	452
399	600	360	541	326	490	34	375	563	329	495	291	437
359	539	323	485	292	439	36	365	548	320	480	281	423
322	484	290	435	262	394	38	355	533	310	466	271	408
290	437	261	393	237	356	40	345	518	300	451	262	394
263	396	237	356	215	323	42	335	503	290	436	252	379
240	361	216	325	196	294	44	325	488	280	422	239	359

Effective length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
958	1440	871	1310	793	1190	13.2	48.5	13.5	45.3	15.1	42.5
Available Strength in Tensile Rupture ($A_g = 0.75A_n$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	32.0		29.1		26.5	
780	1170	709	1060	647	970	Moment of Inertia, in. ⁴					
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1240	447	1110	402	999	362
150	225	138	207	123	185	r_y , in.					
Available Strength in Flexure about Y-Y Axis, kip-ft						3.73		3.71		3.70	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y					
231	348	207	311	181	273	1.67		1.66		1.66	

[†] Shape exceeds compact limit for flexure with $F_y = 50 \text{ ksi}$.

NASCC: THE STEEL CONFERENCE | 2017

Example—Table 6-2

Solution:

$$\frac{P_u}{P_c} = \frac{400 \text{ kips}}{1130 \text{ kips}} = 0.354$$

Because $\frac{P_u}{P_c} \geq 0.2$, use Spec. Eq. H1-1a:

$$\frac{P_r}{P_c} + \frac{8}{9} \left(\frac{M_{rx}}{M_{cx}} + \frac{M_{ry}}{M_{cy}} \right) \leq 1.0$$

$$\frac{400 \text{ kips}}{1130 \text{ kips}} + \frac{8}{9} \left(\frac{250 \text{ kip-ft}}{642 \text{ kip-ft}} + \frac{80.0 \text{ kip-ft}}{311 \text{ kip-ft}} \right) = 0.928 < 1.0 \quad \text{o.k.}$$



Part 6. Design of Members Subject to Combined Forces

- New Tables 6-1a & 6-1b: *Limiting Width-to-Thickness Ratios*
- New Table 6-2: *Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces, W-Shapes*
- Tables 6-3, 6-4 and 6-5: *Cross-Section Strength Eqns & Properties for Encased W-Shapes, Filled Rectangular HSS, Filled Round HSS*

See L.F. Geschwindner, *Eng. Journal*, 2010 &
M. Denavit et al., *Eng. Journal*, 2015



Part 7. Design Considerations for Bolts

- Tables 7-14 includes tension-control bolts

Table 7-14

Dimensions of High-Strength Fasteners, in.

ASTM F3125 Grades A325 and A490

ASTM F3125 Grades F1852 and F2280

Nut may be chamfered on both faces



Measurement		Nominal Bolt Diameter, in									
		1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	
1852, A490, 180 Bolts ^a	Width Across Flats, <i>F</i>	7/8	1 1/16	1 1/4	1 7/16	1 5/8	1 13/16	2	2 3/16	2 3/8	
	Head Diameter, <i>D</i> ^a	1 1/8	1 5/16	1 9/16	1 7/8	2 3/16	2 3/8	—	—	—	
	Height, <i>H</i>	5/16	25/64	15/32	35/64	39/64	11/16	25/32	27/32	15/16	
	Thread Length	1	1 1/4	1 3/8	1 1/2	1 3/4	2	2	2 1/4	2 1/4	

^aFor F1852, A490, 180 Bolt²



Part 8. Design Considerations for Welds

ECCENTRICALLY LOADED WELD GROUPS *Eccentricity in the Plane of the Faying Surface*



- 1) Instantaneous Center of Rotation Method
- 2) Elastic Method
- 3) Plastic Method - new



Part 8. Design Considerations for Welds

ECCENTRICALLY LOADED WELD GROUPS

Eccentricity in the Plane of the Faying Surface

Plastic Method:

$$f_v = \frac{V}{l_w} \quad (8-12)$$

$$f_a = \frac{N}{l_w} \quad (8-13)$$

$$f_b = \frac{4M}{l_w^2} \quad (8-14)$$

$$F_{EXX} = f_b + f_a$$

$$f_w = \sqrt{f_v^2 + (f_a + f_b)^2} \quad (8-15)$$



Part 9. Design of Connecting Elements

- Connecting elements subject to combined loading

2010: $f_e = \sqrt{f_x^2 - f_x f_y + f_y^2 + 3f_{xy}^2} \leq F_y \quad (9-1)$

2016: $\frac{M_r}{M_c} + \left(\frac{P_r}{P_c}\right)^2 + \left(\frac{V_r}{V_c}\right)^4 \leq 1.0 \quad (9-1)$

Dowswell, *Engineering Journal*, No. 1, 2015;
 Neal, *Journal of Applied Mechanics*, 1961;
 Astaneh, *Steel Tips*, 1998



Part 9. Design of Connecting Elements

- Connecting elements subject to combined loading
- Coped beam strength
 - No limits on cope length or cope depth
 - Post-yield strength explicitly accounted for

NASCC: THE STEEL CONFERENCE | 2017



- Coped flexural local buckling strength
—*top flange only coped* ($\phi_b M_n$, M_n/Ω_b)

When $\lambda \leq \lambda_p$


$$M_n = M_p = F_y Z_{net} \quad (9-6)$$

When $\lambda_p < \lambda \leq 2\lambda_p$

$$M_n = M_p - (M_p - M_y) \left(\frac{\lambda}{\lambda_p} - 1 \right) \quad (9-7)$$

When $\lambda > 2\lambda_p$

$$M_n = F_{cr} S_{net} \quad (9-8)$$



where

$$\lambda = \frac{h_o}{t_w}$$

$$\lambda_p = 0.475 \sqrt{\frac{k_1 E}{F_y}}$$

$$k_1 = f k \geq 1.61$$

$$F_{cr} = \frac{0.903 E k_1}{\lambda^2}$$

NASCC: THE STEEL CONFERENCE | 2017



Part 9. Design of Connecting Elements

- Coped beam strength—*top & bottom flange*


Use Spec. Section F11

When $c_b \geq c_t$:

$$C_b = \left[3 + \ln \left(\frac{L_b}{d} \right) \right] \left(1 - \frac{d_{ct}}{d} \right) \leq 1.84 \quad (9-15)$$

When $c_t > c_b$:

$$C_b = \left(\frac{c_b}{c_t} \right) \left[3 + \ln \left(\frac{L_b}{d} \right) \right] \left(1 - \frac{d_{ct}}{d} \right) \leq 1.84 \quad (9-16)$$

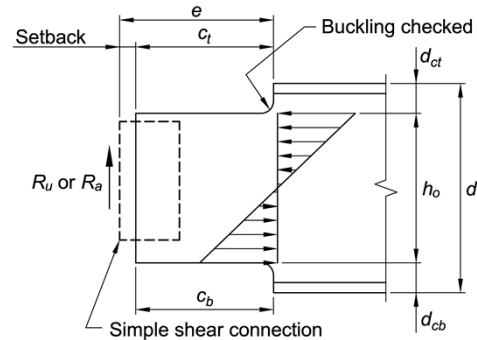

Dowswell & Whyte, *Engineering Journal*, No. 1, 2014

NASCC: THE STEEL CONFERENCE | 2017

Part 9. Design of Connecting Elements


- Connecting elements subject to combined loading
- Coped beam strength
- Other Spec. requirements and design considerations
 - Prying action
 - Plate elements subjected to out-of-plane bending




NASCC: THE STEEL CONFERENCE | 2017

Part 9. Design of Connecting Elements


- Prying action



Prying forces in tee



Typical bolt location



Edge bolt

14th Ed: max 45°

15th Ed: max 60°



- Prying action

LRFD	ASD
$t_{min} = \sqrt{\frac{4T_u b'}{\phi p F_u (1 + \delta \alpha')}} \quad (9-19a)$	$t_{min} = \sqrt{\frac{\Omega 4T_a b'}{p F_u (1 + \delta \alpha')}} \quad (9-19b)$


$$\delta = 1 - \frac{d'}{p}$$

$$\alpha' = 1.0 \text{ if } \beta \geq 1 \text{ or lesser of } 1 \text{ and } \frac{1}{\delta} \left(\frac{\beta}{1-\beta} \right) \text{ if } \beta < 1$$

$$\beta = \frac{1}{\rho} \left(\frac{B_c}{T_f} - 1 \right)$$

$$\rho = \frac{b'}{a'}$$


B_c = available tension per bolt based on
tension only or combined tension & shear rupture




Part 9. Design of Connecting Elements

- Plate elements subjected to out-of-plane loads


Also see Spec. Sect. J10.10.



Transverse load



In-plane moment



Out-of-plane moment



Yield-Line Analysis Models

Part 10. Design of Simple Shear Connections



14th Edition Manual

Bolt and Angle Limit States:

Minimum of:

- Total bolt shear on bolt group
- Total slip resistance for slip-critical bolts on bolt group
- Bolt bearing on the angles
- Bolt tearout on the angles
- Shear yielding of the angles
- Shear rupture of the angles
- Block shear rupture of the angles



Beam	$F_y = 50$ ksi $F_u = 65$ ksi	Table 10-1 All-Bolted Double-Angle Connections																3/4-in. Bolts
	Angle $F_y = 36$ ksi $F_u = 58$ ksi	Bolt and Angle Available Strength, kips																
12 Rows		Bolt Group	Thread Cond.	Hole Type	Angle Thickness, in.													
W44					1/4		5/16		3/8		1/2							
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
	Group A	N	STD	197	295	246	369	288	430	296	430							
		N	STD	197	295	246	369	295	443	361	541							
		SC Class A	STD	152	228	152	228	152	228	152	228							
		SC Class A	OVS	129	194	129	194	129	194	129	194							
		SC Class A	SSLT	152	228	152	228	152	228	152	228							
		SC Class B	STD	197	295	246	369	253	380	253	380							
	Group B	SC Class B	OVS	196	294	216	323	216	323	216	323							
		SC Class B	SSLT	196	294	244	366	253	380	253	380							
		N	STD	197	295	246	369	295	443	361	541							
		N	STD	197	295	246	369	295	443	393	590							
		SC Class A	STD	190	285	190	285	190	285	190	285							
		SC Class A	OVS	162	242	162	242	162	242	162	242							
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
					ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				

Part 10. Design of Simple Shear Connections

15th Ed. Manual

Bolt and Angle Limit States:
Minimum of:

- Σ (Effective strengths of individual bolts)

where

Effective strength =
MIN: bolt shear, slip
resistance for slip-
critical bolts, bolt
bearing, bolt tearout

- Shear yielding -- angles
- Shear rupture -- angles
- Block shear rupture -- angles



Table 10-1

All-Bolted Double-Angle Connections

3/4-in. Bolts

$F_y = 36$ ksi

Angles

Bolt and Angle Available Strength, kips

12 Rows	Bolt Group	Thread Cond.	Hole Type	Angle Thickness, in.							
				1/4		5/16		3/8		1/2	
				ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
	Group A	N	STD/SSLT	197	296	246	370	284	427	286	429
		X	STD/SSLT	197	296	246	370	296	444	360	540
		SC Class A	STD	152	228	152	228	152	228	152	228
			OVS	129	194	129	194	129	194	129	194
			SSLT	152	228	152	228	152	228	152	228
		SC Class B	STD	197	296	246	370	253	380	253	380
	OVS		197	296	215	321	216	323	216	323	
	SSLT		197	296	246	370	253	380	253	380	
	Group B	N	STD/SSLT	197	296	246	370	296	444	360	540
		X	STD/SSLT	197	296	246	370	296	444	394	592
		SC Class A	STD	189	283	190	285	190	285	190	285
			OVS	162	242	162	242	162	242	162	242
SSLT			189	283	190	285	190	285	190	285	
SC Class B		STD	197	296	246	370	296	444	316	475	
	OVS	197	296	246	370	268	400	270	403		
	SSLT	197	296	246	370	296	444	316	475		

Bolt and Angle Available Strength, kips

Part 10. Design of Simple Shear Connections

14th Edition Manual

Beam Web Limit States (kip/in.):

- Bolt bearing on the web
- Bolt tearout on the web
- Shear yielding of the web
- Shear rupture of the web
- Block shear rupture of the web



Beam

$F_y = 50$ ksi
 $F_u = 65$ ksi

Angle

$F_y = 36$ ksi
 $F_u = 58$ ksi

Table 10-1

All-Bolted Double-Angle Connections

3/4-in. Bolts

Bolt and Angle Available Strength, kips

12 Rows	Bolt Group	Thread Cond.	Hole Type	Angle Thickness, in.							
				1/4		5/16		3/8		1/2	
				ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
	Group A	N	STD	197	295	246	369	286	430	286	430
		X	STD	197	295	246	369	295	443	361	541
		SC Class A	STD	152	228	152	228	152	228	152	228
		OVS	129	194	129	194	129	194	129	194	
		SSLT	152	228	152	228	152	228	152	228	
		SC Class B	STD	197	295	246	369	253	380	253	380
	Group B	OVS	196	294	216	323	216	323	216	323	
		SSLT	195	293	244	366	253	380	253	380	
		N	STD	197	295	246	369	295	443	361	541
		X	STD	197	295	246	369	295	443	393	590
		SC Class A	STD	190	285	190	285	190	285	190	285
		OVS	162	242	162	242	162	242	162	242	
Group B	SSLT	190	285	190	285	190	285	190	285		
	STD	197	295	246	369	295	443	316	475		
	OVS	196	294	245	367	270	403	270	403		
SSLT	195	293	244	366	293	440	316	475			

Beam Web Available Strength per Inch Thickness, kips/in.

Hole Type	STD						OVS						SSLT					
	L_{ev} , in.						L_{ev} , in.						L_{ev} , in.					
	1/2	5/8	3/4	7/8	1	1 1/4	1/2	5/8	3/4	7/8	1	1 1/4	1/2	5/8	3/4	7/8	1	1 1/4
Coped at Top Flange Only	1 1/4	498	747	506	759	468	702	476	714	495	743	503	755					
	1 1/2	501	751	509	763	470	706	479	718	497	746	506	758					
	1 3/4	503	754	511	767	473	709	481	722	500	750	508	762					
	2	505	758	514	770	475	713	483	725	502	753	510	766					
	3	513	769	521	781	483	724	491	736	510	764	518	777					
	1 1/4	532	798	540	810	502	753	510	765	529	794	537	806					

Part 14. Design of Beam Bearing Plates, Column Base Plates, Anchor Rods and Column Splices

Table 14-2
Recommended Sizes for Washers and
Anchor Rod Holes in Base Plates

Anchor Rod Diameter	Hole Diameter	Washer Size	Min. Washer Thickness	Anchor Rod Diameter	Hole Diameter	Washer Size	Min. Washer Thickness
in.	in.	in.	in.	in.	in.	in.	in.
3/4	1 ⁵ / ₁₆	2	1/4	1 1/2	2 ³ / ₈	4	1/2
7/8	1 ⁹ / ₁₆	2 1/2	5/16	1 3/4	2 ⁷ / ₈	4 1/2	5/8
1	1 ⁷ / ₈	3	3/8	2	3 1/4	5	3/4
1 1/4	2 ¹ / ₈	3 1/2	1/2	2 1/2	3 3/4	5 1/2	7/8

14th Ed:
3

14th Ed:
1 13/16
2 1/16



14th Ed:
3 1/2
4

NASCC: THE STEEL CONFERENCE | 2017

14th Ed:
2 5/16
2 3/4

Part 14. Design of Beam Bearing Plates, Column Base Plates, Anchor Rods and Column Splices

Notes:

- Hole sizes provided are based on anchor rod size and correlate with ACI 117 (ACI, 2010).

...

- ASTM F844 washer are permitted instead of plate washers when hole clearances are limited to 5/16 in. for rod diameters up to 1 in., 1/2 in. for rod diameters over 1 in. to 2 in., and 1 in. for rod diameters over 2 in. This exception should not be used unless the general contractor has agreed to meet smaller tolerances for anchor rod placement than those permitted in ACI 117.




NASCC: THE STEEL CONFERENCE | 2017

In Summary

- Part 1...New shape sizes and detailing dimensions
- Part 2...ASTM A500 Grade C is preferred for HSS
- Part 3...New footnotes
- Part 4...W-Shape column tables for 65 and 70 ksi
- Part 6...New Super Table 6-2
- Part 7...Table 7-14 includes TC bolts dimensions
- Part 8...New plastic method for ecc. loaded bolt grps
- Part 9...Increased permitted tributary length for prying
- Part 10...Removal of stabilizer plate provisions
- Part 14...Updated Table 14-2 for improved anchor-rod installation



aisc.org/manualresources

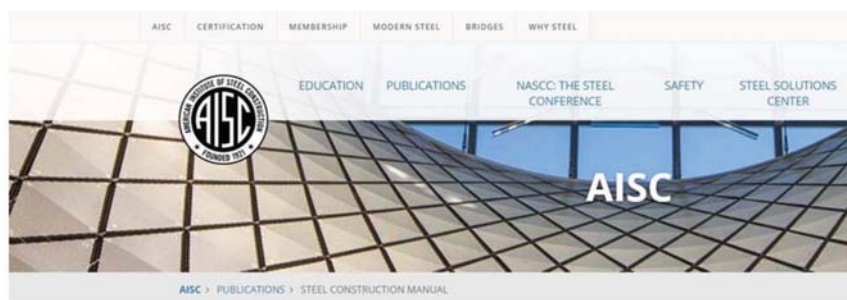


Design Examples V15.0

Part IV: Additional Resources

- Combined Flexure and Axial Force, W-shapes (Table 6-1, 14th Ed. Manual)
- Filled HSS Column Tables, A500 Gr. C (Tables 4-13 to 4-20, 14th Ed. Manual)
- New Super Table: W-Shapes, 65 and 70 ksi
 HSS, ASTM A1085
 HSS, A500 Gr. C
 Pipe
- New Z_{net} Table for Coped W-shapes



Available Summer 2017

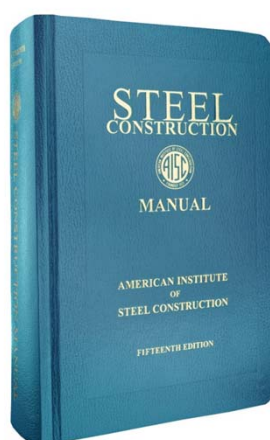

SEMINARS@AISC.ORG





Thank you!

PDH CODE: 71841

