





1


Queues and Command Buffers



Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu





This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



QueuesAndCommandBuffers.pptx mjb - September 18, 2018

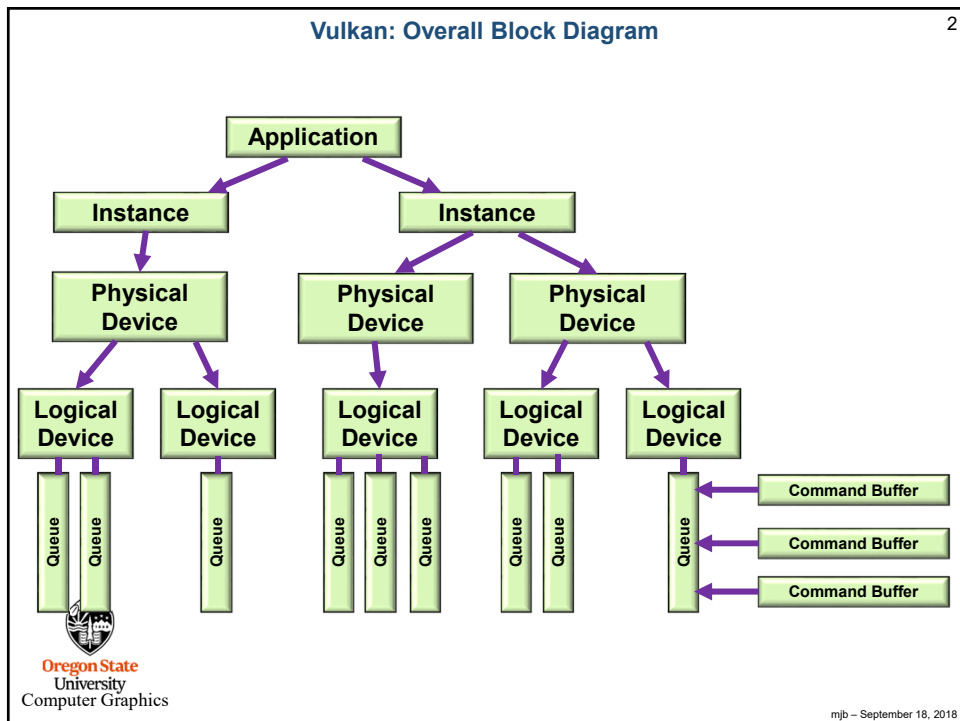

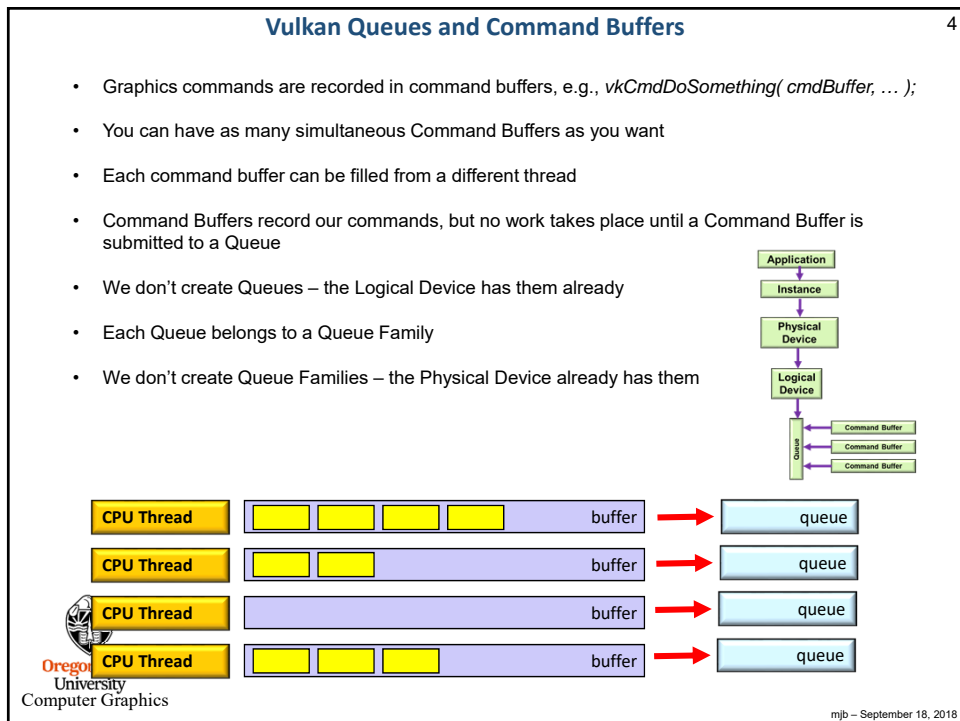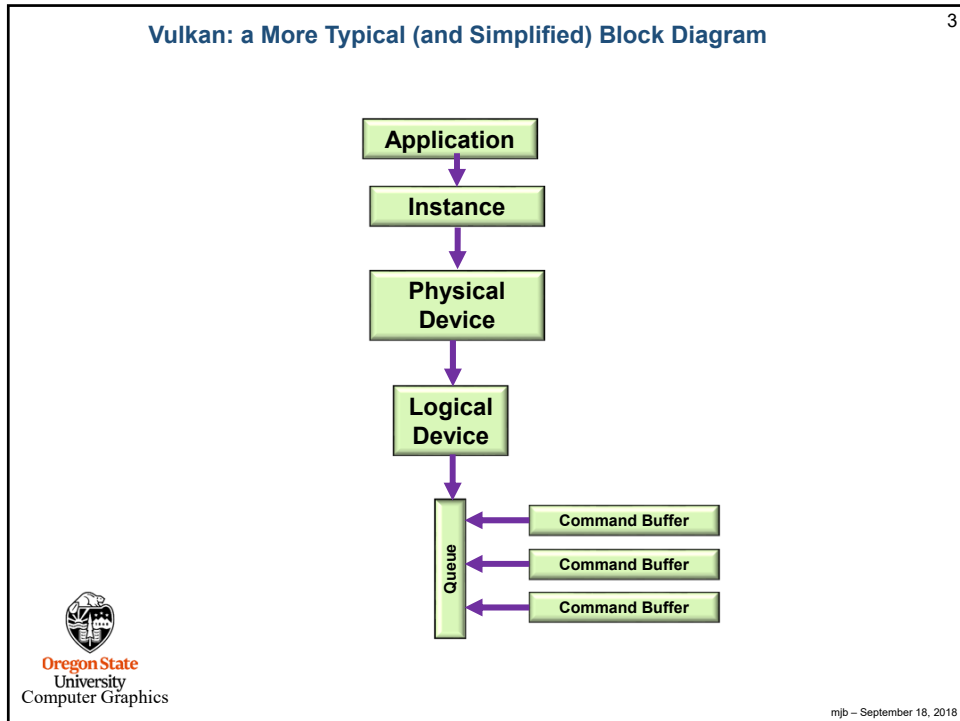

Querying what Queue Families are Available

5

```

uint32_t count;
vkGetPhysicalDeviceQueueFamilyProperties( IN PhysicalDevice, &count, OUT (VkQueueFamilyProperties *) nullptr );

VkQueueFamilyProperties *vqfp = new VkQueueFamilyProperties[ count ];
vkGetPhysicalDeviceQueueFamilyProperties( PhysicalDevice, &count, OUT &vqfp. );

for( unsigned int i = 0; i < count; i++ )
{
    fprintf( FpDebug, "t%d: Queue Family Count = %2d ; ", i, vqfp[i].queueCount );
    if( ( vqfp[i].queueFlags & VK_QUEUE_GRAPHICS_BIT ) != 0 )    fprintf( FpDebug, " Graphics" );
    if( ( vqfp[i].queueFlags & VK_QUEUE_COMPUTE_BIT ) != 0 )    fprintf( FpDebug, " Compute " );
    if( ( vqfp[i].queueFlags & VK_QUEUE_TRANSFER_BIT ) != 0 )  fprintf( FpDebug, " Transfer" );
    fprintf( FpDebug, "\n" );
}

```

Found 3 Queue Families:

```

0: Queue Family Count = 16 ; Graphics Compute Transfer
1: Queue Family Count = 1 ; Transfer
2: Queue Family Count = 8 ; Compute

```



mjb - September 18, 2018

Similarly, we Can Write a Function that Finds the Proper Queue Family

6

```

int
FindQueueFamilyThatDoesGraphics( )
{
    uint32_t count = -1;
    vkGetPhysicalDeviceQueueFamilyProperties( IN PhysicalDevice, &count, OUT (VkQueueFamilyProperties *) nullptr );
    ;
    VkQueueFamilyProperties *vqfp = new VkQueueFamilyProperties[ count ];
    vkGetPhysicalDeviceQueueFamilyProperties( IN PhysicalDevice, &count, OUT vqfp );

    for( unsigned int i = 0; i < count; i++ )
    {
        if( ( vqfp[i].queueFlags & VK_QUEUE_GRAPHICS_BIT ) != 0 )
            return i;
    }
    return -1;
}

```




"These are not the Queue Families you're looking for."



mjb - September 18, 2018

Creating a Logical Device Queue Needs to Know Queue Family Information

7



```

float queuePriorities[ ] =
{
    1.          // one entry per queueCount
};

VkDeviceQueueCreateInfo vdqci[1];
vdqci.sType = VK_STRUCTURE_TYPE_QUEUE_CREATE_INFO;
vdqci.pNext = nullptr;
vdqci.flags = 0;
vdqci.queueFamilyIndex = FindQueueFamilyThatDoesGraphics( );
vdqci.queueCount = 1;
vdqci.queuePriorities = (float *) queuePriorities;

VkDeviceCreateInfo vdc;
vdc.sType = VK_STRUCTURE_TYPE_DEVICE_CREATE_INFO;
vdc.pNext = nullptr;
vdc.flags = 0;
vdc.queueCreateInfoCount = 1;          // # of device queues wanted
vdc.pQueueCreateInfos = IN &vdqci[0]; // array of VkDeviceQueueCreateInfo's
vdc.enabledLayerCount = sizeof(myDeviceLayers) / sizeof(char *);
vdc.ppEnabledLayerNames = myDeviceLayers;
vdc.enabledExtensionCount = sizeof(myDeviceExtensions) / sizeof(char *);
vdc.ppEnabledExtensionNames = myDeviceExtensions;
vdc.pEnabledFeatures = IN &PhysicalDeviceFeatures; // already created

result = vkCreateLogicalDevice( PhysicalDevice, IN &vdc, PALLOCATOR, OUT &LogicalDevice );

VkQueue Queue;
uint32_t queueFamilyIndex = FindQueueFamilyThatDoesGraphics( );
uint32_t queueIndex = 0;

result = vkGetDeviceQueue ( LogicalDevice, queueFamilyIndex, queueIndex, OUT &Queue );
  
```

Creating the Command Pool as part of the Logical Device

8

```

VkResult
Init06CommandPool( )
{
    VkResult result;

    VkCommandPoolCreateInfo vcpci;
    vcpci.sType = VK_STRUCTURE_TYPE_COMMAND_POOL_CREATE_INFO;
    vcpci.pNext = nullptr;
    vcpci.flags = VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT
        | VK_COMMAND_POOL_CREATE_TRANSIENT_BIT;

#ifdef CHOICES
    VK_COMMAND_POOL_CREATE_TRANSIENT_BIT
    VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT
#endif

    vcpci.queueFamilyIndex = FindQueueFamilyThatDoesGraphics( );

    result = vkCreateCommandPool( LogicalDevice, IN &vcpci, PALLOCATOR, OUT &CommandPool );

    return result;
}
  
```

Creating the Command Buffers

```

graph TD
    Application --> Instance
    Instance --> PhysicalDevice[Physical Device]
    PhysicalDevice --> LogicalDevice[Logical Device]
    LogicalDevice --> OutputQueue[Output]
    OutputQueue --- CB1[Command Buffer]
    OutputQueue --- CB2[Command Buffer]
    OutputQueue --- CB3[Command Buffer]
  
```

```

VkResult
Init06CommandBuffers( )
{
    VkResult result;

    // allocate 2 command buffers for the double-buffered rendering:

    {
        VkCommandBufferAllocateInfo          vcbai;
        vcbai.sType = VK_STRUCTURE_TYPE_COMMAND_BUFFER_ALLOCATE_INFO;
        vcbai.pNext = nullptr;
        vcbai.commandPool = CommandPool;
        vcbai.level = VK_COMMAND_BUFFER_LEVEL_PRIMARY;
        vcbai.commandBufferCount = 2; // 2, because of double-buffering

        result = vkAllocateCommandBuffers( LogicalDevice, IN &vcbai, OUT &CommandBuffers[0] );
    }

    // allocate 1 command buffer for the transferring pixels from a staging buffer to a texture buffer:

    {
        VkCommandBufferAllocateInfo          vcbai;
        vcbai.sType = VK_STRUCTURE_TYPE_COMMAND_BUFFER_ALLOCATE_INFO;
        vcbai.pNext = nullptr;
        vcbai.commandPool = CommandPool;
        vcbai.level = VK_COMMAND_BUFFER_LEVEL_PRIMARY;
        vcbai.commandBufferCount = 1;

        result = vkAllocateCommandBuffers( LogicalDevice, IN &vcbai, OUT &TextureCommandBuffer );
    }

    return result;
}
  
```

Oregon State
University
Computer Graphics

mjb - September 18, 2018

Beginning a Command Buffer

```

VkSemaphoreCreateInfo          vsci;
vsci.sType = VK_STRUCTURE_TYPE_SEMAPHORE_CREATE_INFO;
vsci.pNext = nullptr;
vsci.flags = 0;

VkSemaphore imageReadySemaphore;
result = vkCreateSemaphore( LogicalDevice, IN &vsci, PALLOCATOR, OUT &imageReadySemaphore );

uint32_t nextImageIndex;
vkAcquireNextImageKHR( LogicalDevice, IN SwapChain, IN UINT64_MAX,
                      IN imageReadySemaphore, IN VK_NULL_HANDLE, OUT &nextImageIndex );

VkCommandBufferBeginInfo      vcbbi;
vcbbi.sType = VK_STRUCTURE_TYPE_COMMAND_BUFFER_BEGIN_INFO;
vcbbi.pNext = nullptr;
vcbbi.flags = VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT;
vcbbi.pInheritanceInfo = (VkCommandBufferInheritanceInfo *)nullptr;



result = vkBeginCommandBuffer( CommandBuffers[nextImageIndex], IN &vcbbi );

...

vkEndCommandBuffer( CommandBuffers[nextImageIndex] );
  
```

Oregon State
University
Computer Graphics

mjb - September 18, 2018

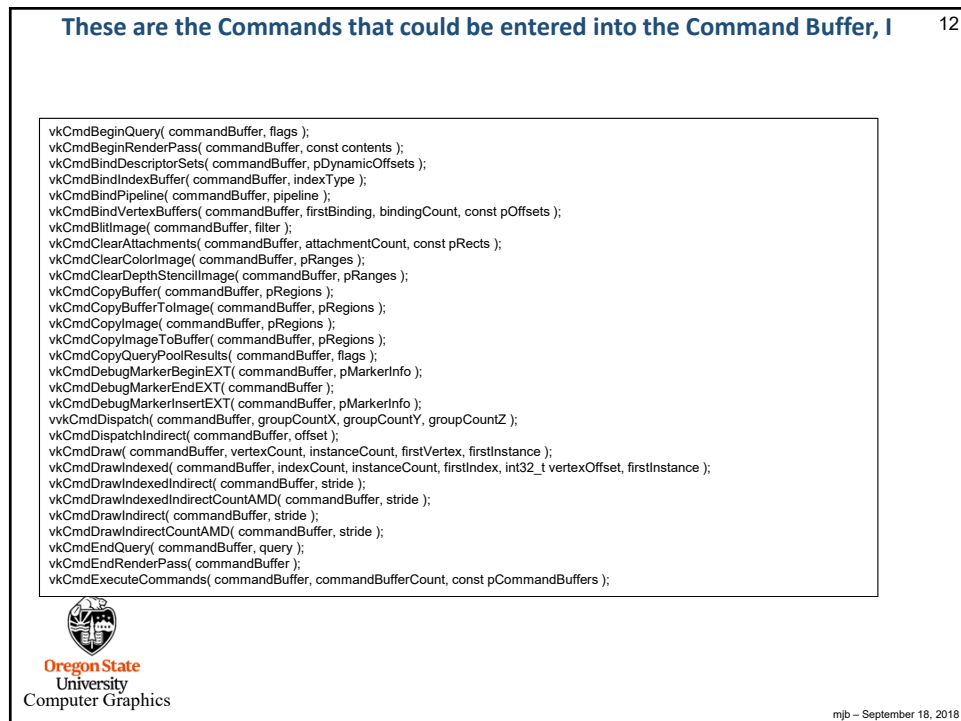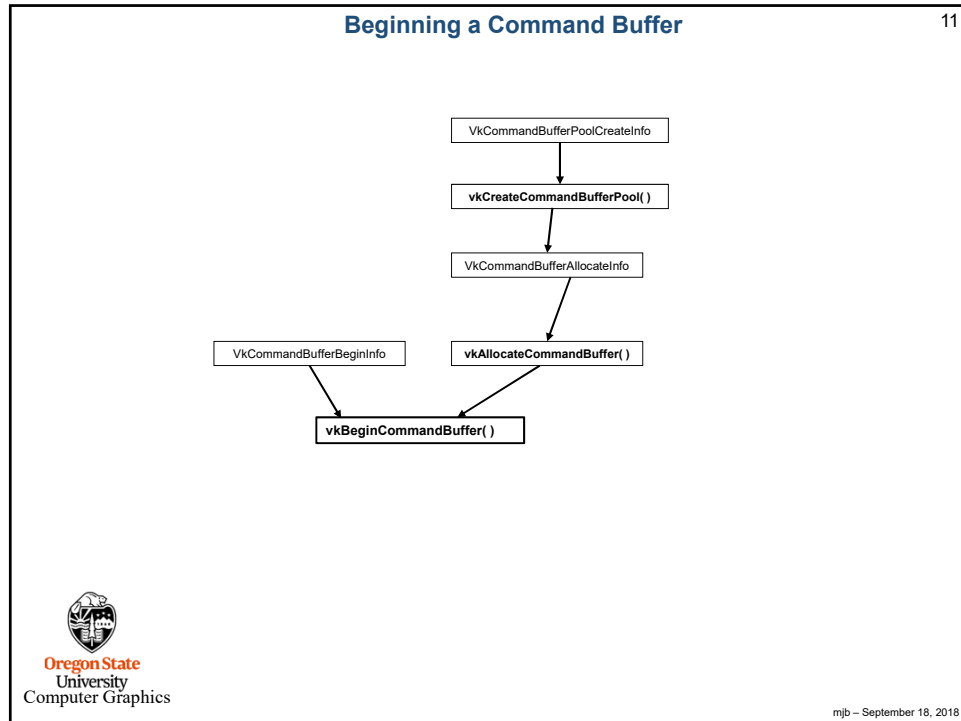

These are the Commands that could be entered into the Command Buffer, II

13

```

vkCmdFillBuffer( commandBuffer, dstBuffer, dstOffset, size, data );
vkCmdNextSubpass( commandBuffer, contents );
vkCmdPipelineBarrier( commandBuffer, srcStageMask, dstStageMask, dependencyFlags, memoryBarrierCount, VkMemoryBarrier* pMemoryBarriers,
bufferMemoryBarrierCount, pBufferMemoryBarriers, imageMemoryBarrierCount, pImageMemoryBarriers );
vkCmdProcessCommandsNVX( commandBuffer, pProcessCommandsInfo );
vkCmdPushConstants( commandBuffer, layout, stageFlags, offset, size, pValues );
vkCmdPushDescriptorSetKHR( commandBuffer, pipelineBindPoint, layout, set, descriptorWriteCount, pDescriptorWrites );
vkCmdPushDescriptorSetWithTemplateKHR( commandBuffer, descriptorUpdateTemplate, layout, set, pData );
vkCmdReserveSpaceForCommandsNVX( commandBuffer, pReserveSpaceInfo );
vkCmdResetEvent( commandBuffer, event, stageMask );
vkCmdResetQueryPool( commandBuffer, queryPool, firstQuery, queryCount );
vkCmdResolveImage( commandBuffer, srcImage, srcImageLayout, dstImage, dstImageLayout, regionCount, pRegions );
vkCmdSetBlendConstants( commandBuffer, blendConstants[4] );
vkCmdSetDepthBias( commandBuffer, depthBiasConstantFactor, depthBiasClamp, depthBiasSlopeFactor );
vkCmdSetDepthBounds( commandBuffer, minDepthBounds, maxDepthBounds );
vkCmdSetDeviceMaskKHR( commandBuffer, deviceMask );
vkCmdSetDiscardRectangleEXT( commandBuffer, firstDiscardRectangle, discardRectangleCount, pDiscardRectangles );
vkCmdSetEvent( commandBuffer, event, stageMask );
vkCmdSetLineWidth( commandBuffer, lineWidth );
vkCmdSetScissor( commandBuffer, firstScissor, scissorCount, pScissors );
vkCmdSetStencilCompareMask( commandBuffer, faceMask, compareMask );
vkCmdSetStencilReference( commandBuffer, faceMask, reference );
vkCmdSetStencilWriteMask( commandBuffer, faceMask, writeMask );
vkCmdSetViewport( commandBuffer, firstViewport, viewportCount, pViewports );
vkCmdSetViewportWScalingNV( commandBuffer, firstViewport, viewportCount, pViewportWScalings );
vkCmdUpdateBuffer( commandBuffer, dstBuffer, dstOffset, dataSize, pData );
vkCmdWaitEvents( commandBuffer, eventCount, pEvents, srcStageMask, dstStageMask, memoryBarrierCount, pMemoryBarriers,
bufferMemoryBarrierCount, pBufferMemoryBarriers, imageMemoryBarrierCount, pImageMemoryBarriers );
vkCmdWriteTimestamp( commandBuffer, pipelineStage, queryPool, query );

```



Oregon State
University
Computer Graphics

mjb – September 18, 2018

14

```

VkResult
RenderScene()
{
    VkResult result;
    VkSemaphoreCreateInfo vsci;
    vsci.sType = VK_STRUCTURE_TYPE_SEMAPHORE_CREATE_INFO;
    vsci.pNext = nullptr;
    vsci.flags = 0;

    VkSemaphore imageReadySemaphore;
    result = vkCreateSemaphore( LogicalDevice, IN &vsci, PALLOCATOR, OUT &imageReadySemaphore );

    uint32_t nextImageIndex;
    vkAcquireNextImageKHR( LogicalDevice, IN SwapChain, IN UINT64_MAX, IN VK_NULL_HANDLE,
    IN VK_NULL_HANDLE, OUT &nextImageIndex );

    VkCommandBufferBeginInfo vcbbi;
    vcbbi.sType = VK_STRUCTURE_TYPE_COMMAND_BUFFER_BEGIN_INFO;
    vcbbi.pNext = nullptr;
    vcbbi.flags = VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT;
    vcbbi.pInheritanceInfo = (VkCommandBufferInheritanceInfo *)nullptr;

    result = vkBeginCommandBuffer( CommandBuffers[nextImageIndex], IN &vcbbi );
}

```



Oregon State
University
Computer Graphics

mjb – September 18, 2018

15

```

VkClearColorValue          vccv;
vccv.float32[0] = 0.0;
vccv.float32[1] = 0.0;
vccv.float32[2] = 0.0;
vccv.float32[3] = 1.0;

VkClearDepthStencilValue   vcdsv;
vcdsv.depth = 1.f;
vcdsv.stencil = 0;

VkClearColorValue          vcv[2];
vcv[0].color = vccv;
vcv[1].depthStencil = vcdsv;

VkOffset2D o2d = { 0, 0 };
VkExtent2D e2d = { Width, Height };
VkRect2D r2d = { o2d, e2d };

VkRenderPassBeginInfo      vrpbi;
vrpbi.sType = VK_STRUCTURE_TYPE_RENDER_PASS_BEGIN_INFO;
vrpbi.pNext = nullptr;
vrpbi.renderPass = RenderPass;
vrpbi.framebuffer = Framebuffers[ nextImageIndex ];
vrpbi.renderArea = r2d;
vrpbi.clearValueCount = 2;
vrpbi.pClearValues = vcv;          // used for VK_ATTACHMENT_LOAD_OP_CLEAR

vkCmdBeginRenderPass( CommandBuffers[nextImageIndex], IN &vrpbi, IN VK_SUBPASS_CONTENTS_INLINE );

```



mjb - September 18, 2018

16

```

VkViewport viewport =
{
    0.,          // x
    0.,          // y
    (float)Width,
    (float)Height,
    0.,          // minDepth
    1.           // maxDepth
};

vkCmdSetViewport( CommandBuffers[nextImageIndex], 0, 1, IN &viewport );    // 0=firstViewport, 1=viewportCount

VkRect2D scissor =
{
    0,
    0,
    Width,
    Height
};

vkCmdSetScissor( CommandBuffers[nextImageIndex], 0, 1, IN &scissor );

vkCmdBindDescriptorSets( CommandBuffers[nextImageIndex], VK_PIPELINE_BIND_POINT_GRAPHICS,
    GraphicsPipelineLayout, 0, 4, DescriptorSets, 0, (uint32_t*)nullptr );
    // dynamic offset count, dynamic offsets

vkCmdBindPushConstants( CommandBuffers[nextImageIndex], PipelineLayout, VK_SHADER_STAGE_ALL, offset, size, void *values );

VkBuffer buffers[1] = { MyVertexDataBuffer.buffer };

VkDeviceSize offsets[1] = { 0 };

vkCmdBindVertexBuffers( CommandBuffers[nextImageIndex], 0, 1, buffers, offsets );    // 0, 1 = firstBinding, bindingCount

const uint32_t vertexCount = sizeof(VertexData) / sizeof(VertexData[0]);
const uint32_t instanceCount = 1;
const uint32_t firstVertex = 0;
const uint32_t firstInstance = 0;
vkCmdDraw( CommandBuffers[nextImageIndex], vertexCount, instanceCount, firstVertex, firstInstance );

vkCmdEndRenderPass( CommandBuffers[nextImageIndex] );

vkEndCommandBuffer( CommandBuffers[nextImageIndex] );

```

Cc

18, 2018

Submitting a Command Buffer to a Queue for Execution

17

```

VkSubmitInfo      vsi;
    vsi.sType = VK_STRUCTURE_TYPE_SUBMIT_INFO;
    vsi.pNext = nullptr;
    vsi.commandBufferCount = 1;
    vsi.pCommandBuffers = &CommandBuffer;
    vsi.waitSemaphoreCount = 1;
    vsi.pWaitSemaphores = imageReadySemaphore;
    vsi.signalSemaphoreCount = 0;
    vsi.pSignalSemaphores = (VkSemaphore *)nullptr;
    vsi.pWaitDstStageMask = (VkPipelineStageFlags *)nullptr;

```



mjb - September 18, 2018

The Entire Submission / Wait / Display Process

18

```

VkFenceCreateInfo vfc;
    vfc.sType = VK_STRUCTURE_TYPE_FENCE_CREATE_INFO;
    vfc.pNext = nullptr;
    vfc.flags = 0;

VkFence renderFence;
vkCreateFence( LogicalDevice, &vfc, PALLOCATOR, OUT &renderFence ); ← Create fence
result = VK_SUCCESS;

VkPipelineStageFlags waitAtBottom = VK_PIPELINE_STAGE_BOTTOM_OF_PIPE_BIT;
VkQueue presentQueue;
vkGetDeviceQueue( LogicalDevice, FindQueueFamilyThatDoesGraphics( ), 0, OUT &presentQueue );
    // 0 =, queueIndex ← Get the queue

VkSubmitInfo      vsi;
    vsi.sType = VK_STRUCTURE_TYPE_SUBMIT_INFO;
    vsi.pNext = nullptr;
    vsi.waitSemaphoreCount = 1;
    vsi.pWaitSemaphores = &imageReadySemaphore; ← Fill in the queue information
    vsi.pWaitDstStageMask = &waitAtBottom;
    vsi.commandBufferCount = 1;
    vsi.pCommandBuffers = &CommandBuffers[nextImageIndex];
    vsi.signalSemaphoreCount = 0;
    vsi.pSignalSemaphores = &SemaphoreRenderFinished;

result = vkQueueSubmit( presentQueue, 1, IN &vsi, IN renderFence ); // 1 = submitCount
result = vkWaitForFences( LogicalDevice, 1, IN &renderFence, VK_TRUE, UINT64_MAX ); // waitAll, timeout ← Submit the queue

vkDestroyFence( LogicalDevice, renderFence, PALLOCATOR ); ← Wait for the fence

VkPresentInfoKHR vpi;
    vpi.sType = VK_STRUCTURE_TYPE_PRESENT_INFO_KHR;
    vpi.pNext = nullptr;
    vpi.waitSemaphoreCount = 0;
    vpi.pWaitSemaphores = (VkSemaphore *)nullptr;
    vpi.swapchainCount = 1;
    vpi.pSwapchains = &SwapChain;
    vpi.pImageIndices = &nextImageIndex;
    vpi.pResults = (VkResult *)nullptr;

result = vkQueuePresentKHR( presentQueue, IN &vpi );

```



per 18, 2018