





1

  
**Synchronization**


  
**Oregon State University**  
Mike Bailey  
mjb@cs.oregonstate.edu





This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)

  
Oregon State University  
Computer Graphics

Synchronization.pptx mjb - September 18, 2018

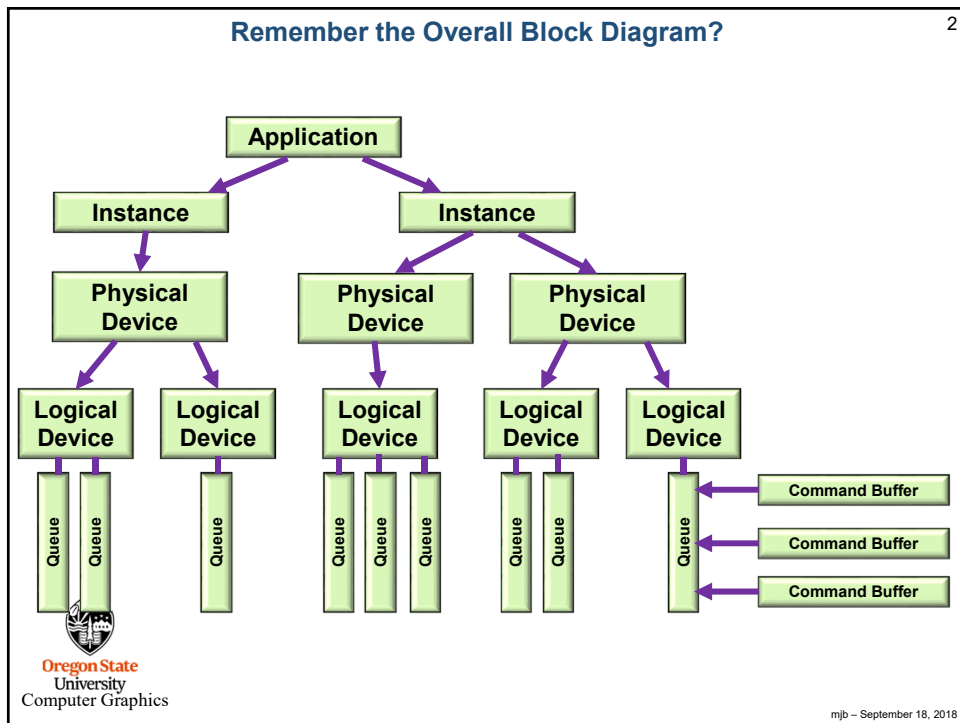

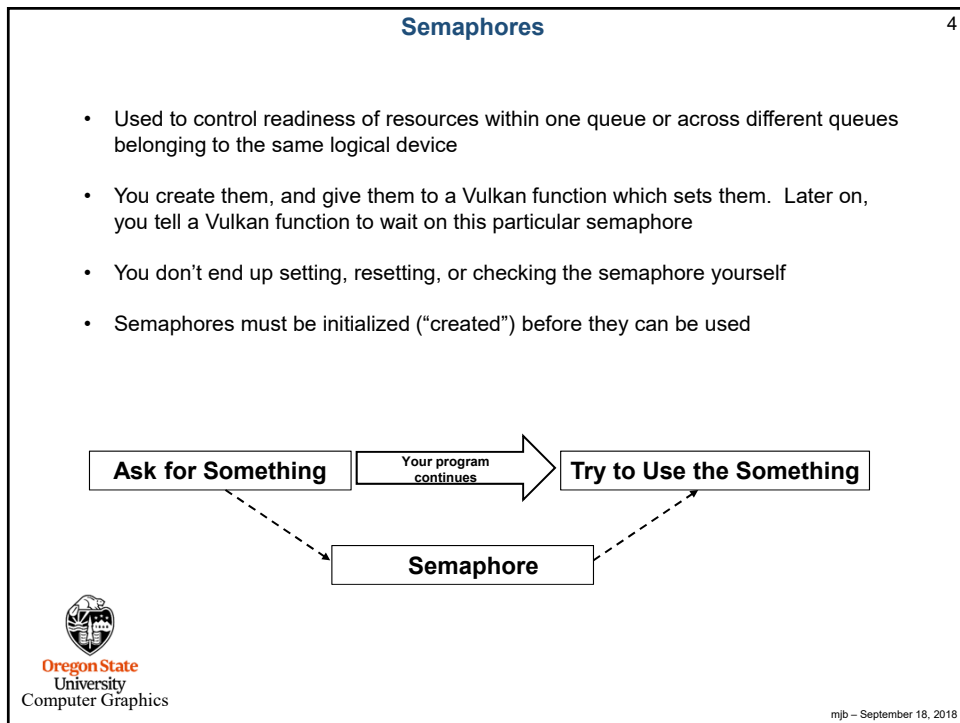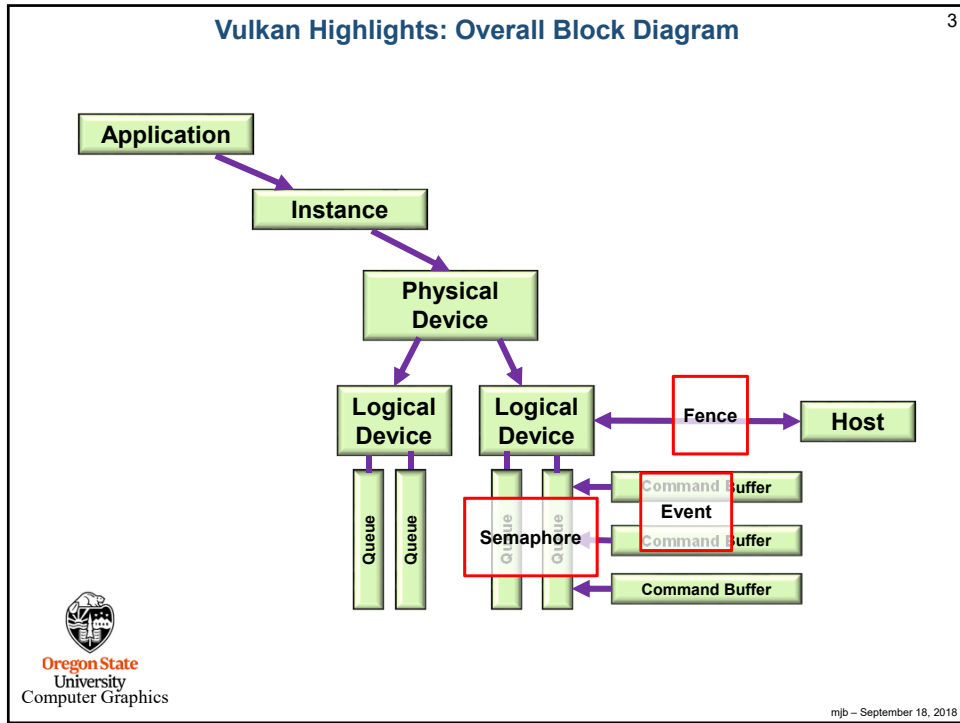

## Creating a Semaphore

5

```

VkSemaphoreCreateInfo      vsci;
    vsci.sType = VK_STRUCTURE_TYPE_SEMAPHORE_CREATE_INFO;
    vsci.pNext = nullptr;
    vsci.flags = 0;;

VkSemaphore      semaphore;
result = vkCreateSemaphore( LogicalDevice, IN &vsци, PALLOCATOR, OUT &semaphore );

```



mjb - September 18, 2018

## Semaphores Example during the Render Loop

6

```

VkSemaphore imageReadySemaphore;

VkSemaphoreCreateInfo      vsци;
    vsци.sType = VK_STRUCTURE_TYPE_SEMAPHORE_CREATE_INFO;
    vsци.pNext = nullptr;
    vsци.flags = 0;

result = vkCreateSemaphore( LogicalDevice, IN &vsци, PALLOCATOR, OUT &imageReadySemaphore );

uint32_t nextImageIndex;
vkAcquireNextImageKHR( LogicalDevice, IN SwapChain, IN UINT64_MAX,
    IN imageReadySemaphore, IN VK_NULL_HANDLE, OUT &nextImageIndex );

...

VkPipelineStageFlags waitAtBottom = VK_PIPELINE_STAGE_BOTTOM_OF_PIPE_BIT;
VkSubmitInfo      vsi;
    vsi.sType = VK_STRUCTURE_TYPE_SUBMIT_INFO;
    vsi.pNext = nullptr;
    vsi.waitSemaphoreCount = 1;
    vsi.pWaitSemaphores = &imageReadySemaphore;
    vsi.pWaitDstStageMask = &waitAtBottom;
    vsi.commandBufferCount = 1;
    vsi.pCommandBuffers = &CommandBuffers[nextImageIndex];
    vsi.signalSemaphoreCount = 0;
    vsi.pSignalSemaphores = (VkSemaphore) nullptr;

result = vkQueueSubmit( presentQueue, 1, IN &vsци, IN renderFence );

```

Could be an array  
of semaphores

mjb - September 18, 2018

## Fences

7

- Used to synchronize the application with commands submitted to a queue
- Announces that queue-submitted work is finished
- Much finer control than semaphores
- You can un-signal, signal, test or block-while-waiting



mjb - September 18, 2018

## Fences

8

```

#define VK_FENCE_CREATE_UNSIGNALED_BIT    0

VkFenceCreateInfo    vfc;
vfc.sType = VK_STRUCTURE_TYPE_FENCE_CREATE_INFO;
vfc.pNext = nullptr;
vfc.flags = VK_FENCE_CREATE_UNSIGNALED_BIT;    // = 0
           // VK_FENCE_CREATE_SIGNALED_BIT is only other option

VkFence    fence;
result = vkCreateFence( LogicalDevice, IN &vfc, PALLOCATOR, OUT &fence );

    , , ,

// returns right away:
result = vkGetFenceStatus( LogicalDevice, IN fence );
           // result = VK_SUCCESS means it has signaled
           // result = VK_NOT_READY means it has not signaled

// blocks:
result = vkWaitForFences( LogicalDevice, 1, IN &fence, waitForAll, timeout );
           // waitForAll = VK_TRUE:  wait for all fences in the list
           // waitForAll = VK_FALSE: wait for any one fence in the list
           // timeout is a uint64_t timeout in nanoseconds (could be 0, which means to return immediately)
           // timeout can be up to UINT64_MAX = 0xffffffffffff (= 580+ years)
           // result = VK_SUCCESS means it returned because a fence (or all fences) signaled
           // result = VK_TIMEOUT means it returned because the timeout was exceeded

```

Could be an  
array of fences



mjb - September 18, 2018

## Fence Example

9

```

VkFence renderFence;
vkCreateFence( LogicalDevice, &vci, PALLOCATOR, OUT &renderFence );

VkPipelineStageFlags waitAtBottom = VK_PIPELINE_STAGE_BOTTOM_OF_PIPE_BIT;

VkQueue presentQueue;
vkGetDeviceQueue( LogicalDevice, FindQueueFamilyThatDoesGraphics( ), 0, OUT &presentQueue );

VkSubmitInfo vsi;
vsi.sType = VK_STRUCTURE_TYPE_SUBMIT_INFO;
vsi.pNext = nullptr;
vsi.waitSemaphoreCount = 1;
vsi.pWaitSemaphores = &imageReadySemaphore;
vsi.pWaitDstStageMask = &waitAtBottom;
vsi.commandBufferCount = 1;
vsi.pCommandBuffers = &CommandBuffers[nextImageIndex];
vsi.signalSemaphoreCount = 0;
vsi.pSignalSemaphores = (VkSemaphore) nullptr;

result = vkQueueSubmit( presentQueue, 1, IN vsi, IN renderFence );
...

result = vkWaitForFences( LogicalDevice, 1, IN &renderFence, VK_TRUE, UINT64_MAX );
...

result = vkQueuePresentKHR( presentQueue, IN &vpi );

```

Oregon State  
University  
Computer Graphics

mjb - September 18, 2018

## Events

10

- Events provide even finer-grained synchronization
- Events are a primitive that can be signaled by the host or the device
- Can even signal at one place in the pipeline and wait for it at another place in the pipeline
- Signaling in the pipeline means "signal as the last piece of this draw command passes that point in the pipeline".
- You can signal, un-signal, or test from a vk function or from a vkCmd function
- Can wait from a vkCmd function

  
Oregon State  
University  
Computer Graphics

mjb - September 18, 2018

### Controlling Events from the Host

11

```

VkEventCreateInfo      veci;
    veci.sType = VK_STRUCTURE_TYPE_EVENT_CREATE_INFO;
    veci.pNext = nullptr;
    veci.flags = 0;


VkEvent      event;
result = vkCreateEvent( LogicalDevice, IN &veci, PALLOCATOR, OUT &event );

result = vkSetEvent( LogicalDevice, IN event );

result = vkResetEvent( LogicalDevice, IN event );

result = vkGetEventStatus( LogicalDevice, IN event );
    // result = VK_EVENT_SET: signaled
    // result = VK_EVENT_RESET: not signaled
    
```

**Note: the CPU cannot *block* waiting for an event, but it can test for one**



mjb - September 18, 2018

### Controlling Events from the Device

12

```


result = vkCmdSetEvent(  CommandBuffer, IN event, pipelineStageBits );
result = vkCmdResetEvent( CommandBuffer, IN event, pipelineStageBits );
result = vkCmdWaitEvents( CommandBuffer, 1, &event,
    srcPipelineStageBits, dstPipelineStageBits,
    memoryBarrierCount, pMemoryBarriers,
    bufferMemoryBarrierCount, pBufferMemoryBarriers,
    imageMemoryBarrierCount, pImageMemoryBarriers );
    
```

Could be an array of events

Where signaled, where wait for the signal

Memory barriers get executed after events have been signaled

**Note: the GPU cannot *test* for an event, but it can block waiting for one**



mjb - September 18, 2018