


Dynamic State Variables



Oregon State University
Mike Bailey
mb@cs.oregonstate.edu

CC BY-NC-ND
This work is licensed under a Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License.

Oregon State University Computer Graphics

DynamicStateVariables.ppt mb - December 21, 2022


Creating a Pipeline with Dynamically Changeable State Variables

The graphics pipeline data structure is full of state information, and, as previously-discussed, is largely immutable, that is, the information contained inside it is fixed, and can only be changed by creating a new graphics pipeline data structure with new information.

That isn't quite true. To a certain extent, Vulkan allows you to declare parts of the pipeline state changeable. This allows you to alter pipeline state information on the fly.

This is useful for managing state information that needs to change frequently. This also creates possible optimization opportunities for the Vulkan driver.

Oregon State University Computer Graphics mb - December 21, 2022

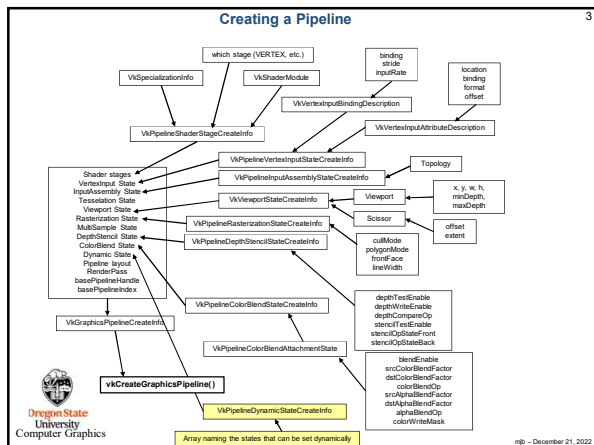

- ### Which Pipeline State Variables can be Changed Dynamically
- The possible dynamic variables are shown in the `VkDynamicState` enum:
- VK_DYNAMIC_STATE_VIEWPORT
 - VK_DYNAMIC_STATE_SCISSOR
 - VK_DYNAMIC_STATE_LINE_WIDTH
 - VK_DYNAMIC_STATE_DEPTH_BIAS
 - VK_DYNAMIC_STATE_BLEND_CONSTANTS
 - VK_DYNAMIC_STATE_DEPTH_BOUNDS
 - VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK
 - VK_DYNAMIC_STATE_STENCIL_WRITE_MASK
 - VK_DYNAMIC_STATE_STENCIL_REFERENCE
- Oregon State University Computer Graphics mb - December 21, 2022

Creating a Pipeline

```

VkDynamicState
{
    VK_DYNAMIC_STATE_VIEWPORT,
    VK_DYNAMIC_STATE_LINE_WIDTH
};

VkPipelineDynamicStateCreateInfo
{
    vpdscI.type = VK_STRUCTURE_TYPE_PIPELINE_DYNAMIC_STATE_CREATE_INFO;
    vpdscI.pNext = nullptr;
    vpdscI.flags = 0;
    vpdscI.dynamicStateCount = sizeof(vds) / sizeof(VkDynamicState); // i.e., 2
    vpdscI.pDynamicStates = &vds;
};

VkGraphicsPipelineCreateInfo
{
    vgpCI.pDynamicState = &vpdscI;
    ...
};

vkCreateGraphicsPipelines( LogicalDevice, pipelineCache, 1, &vgpci, PALLOCATOR, &GraphicsPipeline );

```

If you declare certain state variables to be dynamic like this, then you must fill them in the command buffer! Otherwise, they are *undefined*.

Oregon State University Computer Graphics mb - December 21, 2022

Filling the Dynamic State Variables in the Command Buffer

First call:

```
vkCmdBindPipeline(...);
```

Then, the command buffer-bound function calls to set these dynamic states are:

```


vkCmdSetViewport( commandBuffer, firstViewport, viewportCount, pViewports );
vkCmdSetScissor( commandBuffer, firstScissor, scissorCount, pScissors );
vkCmdSetLineWidth( commandBuffer, lineWidth );
vkCmdSetDepthBias( commandBuffer, depthBiasConstantFactor, depthBiasClamp, depthBiasSlopeFactor );
vkCmdSetBlendConstants( commandBuffer, blendConstants[4] );
vkCmdSetDepthBounds( commandBuffer, minDepthBounds, maxDepthBounds );
vkCmdSetStencilCompareMask( commandBuffer, faceMask, compareMask );
vkCmdSetStencilWriteMask( commandBuffer, faceMask, writeMask );
vkCmdSetStencilReference( commandBuffer, faceMask, reference );


```

Oregon State University Computer Graphics mb - December 21, 2022

This is from one of the Vulkan .h Files
Does this mean more Dynamic States are in the Works?

```
VK_DYNAMIC_STATE_VIEWPORT = 0,  
VK_DYNAMIC_STATE_SCISSOR = 1,  
VK_DYNAMIC_STATE_LINE_WIDTH = 2,  
VK_DYNAMIC_STATE_DEPTH_BIAS = 3,  
VK_DYNAMIC_STATE_BLEND_CONSTANTS = 4,  
VK_DYNAMIC_STATE_DEPTH_BOUNDS = 5,  
VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK = 6,  
VK_DYNAMIC_STATE_STENCIL_WRITE_MASK = 7,  
VK_DYNAMIC_STATE_STENCIL_REFERENCE = 8,  
VK_DYNAMIC_STATE_CULL_MODE = 1000267000,  
VK_DYNAMIC_STATE_FRONT_FACE = 1000267001,  
VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY = 1000267002,  
VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT = 1000267003,  
VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT = 1000267004,  
VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE = 1000267005,  
VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE = 1000267006,  
VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE = 1000267007,  
VK_DYNAMIC_STATE_DEPTH_COMPARE_OP = 1000267008,  
VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE = 1000267009,  
VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE = 1000267010,  
VK_DYNAMIC_STATE_STENCIL_OP = 1000267011,
```

 Oregon State University
Computer Graphics

 #9 - Dec 21, 2022