

1

## Screen Space Ambient Occlusion (SSAO)



**Oregon State**  
University

Mike Bailey

mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)





SSAO.pdf

mjb - January 20, 2022

1

2

## A Neat Global Illumination-ish Trick: Screen Space Ambient Occlusion (SSAO)

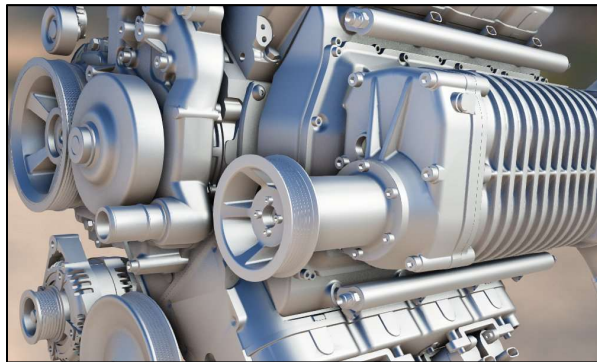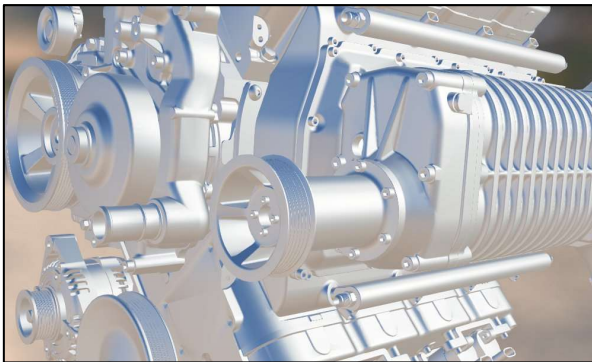

Kitware

The idea is to imitate the darkness that appears in crevices that light has a hard time getting to.



mjb - January 20, 2022

2

3

### A Neat Global Illumination-ish Trick: Screen Space Ambient Occlusion (SSAO)

This part of the scene should be darker because it is harder for ambient light to get down between objects.

“Render” these normal and depth values into a software framebuffer.

Now, look for places in the framebuffer where the depths are about the same, but there is a discontinuity in the normal.

Make that part of the scene darker.

Oregon State University  
Computer Graphics

mjb – January 20, 2022

3

4

### First, Create a GPU Memory Framebuffer

```
// create a framebuffer object and a depth texture object:
glGenFramebuffers(1, &NZFramebuffer);
glGenTextures(1, &NZTexture);
glGenTextures(1, &NZDepth);

glBindFramebuffer(GL_FRAMEBUFFER, NZFramebuffer);

// create a texture that will be the framebuffer's color buffer (to store normal and z):
glBindTexture(GL_TEXTURE_2D, NZTexture);
glTexImage2D(GL_TEXTURE_2D, 0, GL_RGBA32F, SSAO_WIDTH, SSAO_HEIGHT, 0, GL_RGBA, GL_FLOAT, NULL);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MIN_FILTER, GL_NEAREST);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MAG_FILTER, GL_NEAREST);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_S, GL_CLAMP_TO_EDGE);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_T, GL_CLAMP_TO_EDGE);
glFramebufferTexture2D(GL_FRAMEBUFFER, GL_COLOR_ATTACHMENT0, GL_TEXTURE_2D, NZTexture, 0);

// create a texture that will be the framebuffer's depth buffer:
glBindTexture(GL_TEXTURE_2D, NZDepth);
glTexImage2D(GL_TEXTURE_2D, 0, GL_DEPTH_COMPONENT, SSAO_WIDTH, SSAO_HEIGHT, 0,
             GL_DEPTH_COMPONENT, GL_FLOAT, NULL);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MIN_FILTER, GL_NEAREST);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MAG_FILTER, GL_NEAREST);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_S, GL_CLAMP_TO_EDGE);
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_T, GL_CLAMP_TO_EDGE);
glFramebufferTexture2D(GL_FRAMEBUFFER, GL_DEPTH_ATTACHMENT, GL_TEXTURE_2D, NZDepth, 0);

glBindFramebuffer(GL_FRAMEBUFFER, 0);
```

Oregon State University  
Computer Graphics

mjb – January 20, 2022

4

## SSAO is a Two-pass Algorithm:

5

## Pass #1: Render the Surface Normals and Depths into a GPU Memory Framebuffer

## GetNZ.vert


```
#version 330 compatibility

// note: in this pass, we are not rendering any colors, so no lighting info is necessary
// however, transformation matrix info is necessary so that the scene is in the right orientation to get the normal and z

uniform mat4 uAnim;
uniform mat4 uModelView;
uniform mat4 uProj;

out vec3 vN;
out vec4 vP;

void
main()
{
    vN = normalize( vec3( uAnim * vec4(gl_Normal,0.) ) );
    // we want the normal in model coordinates, not world coords or eye coords
    vP = uProj * uModelView * uAnim * gl_Vertex;
    // we want the z in eye coordinates because we need to divide by the .w
    gl_Position = vP;
}
```



mjb - January 20, 2022

5

## SSAO is a Two-pass Algorithm:

6

## Pass #1: Render the Surface Normals and Depths into a GPU Memory Framebuffer

## GetNZ.frag

```
#version 330 compatibility

// note: in this pass, we are not rendering any colors, so no lighting info is necessary

in vec3 vN;
in vec4 vP;

void main()
{
    vec3 N = normalize(vN); // in the range 0. to +1.
    float Z = vP.z / vP.w; // in the range -1. to +1.
    gl_FragColor = vec4(N, Z); // this gets written into the uNZMap texture
}
```





mjb - January 20, 2022

6

Here is the Scene and What the Normal Vectors Look Like, Rendered as Colors



7

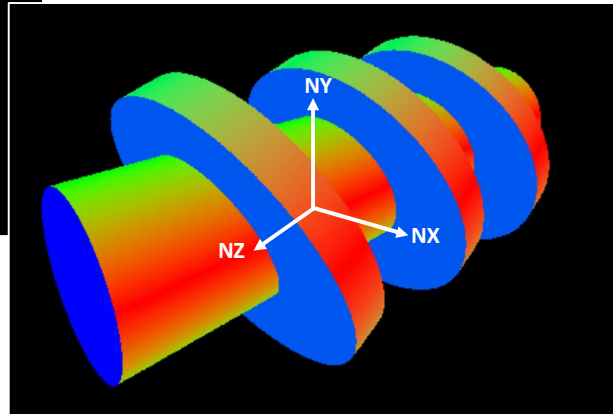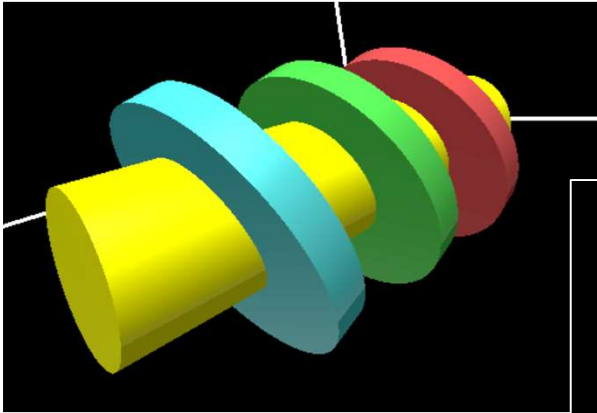

7

Here is the Scene and What the Z Values Look Like, Rendered as Grayscale

8

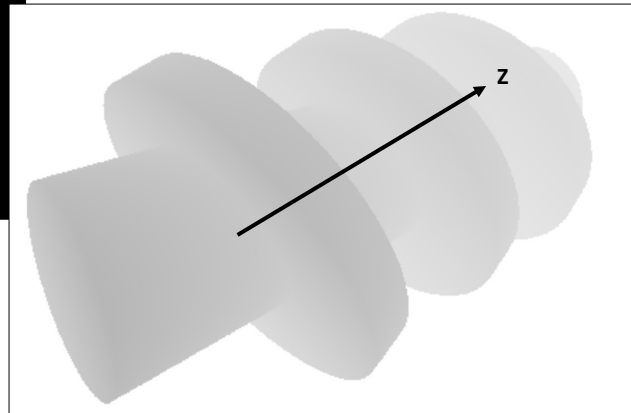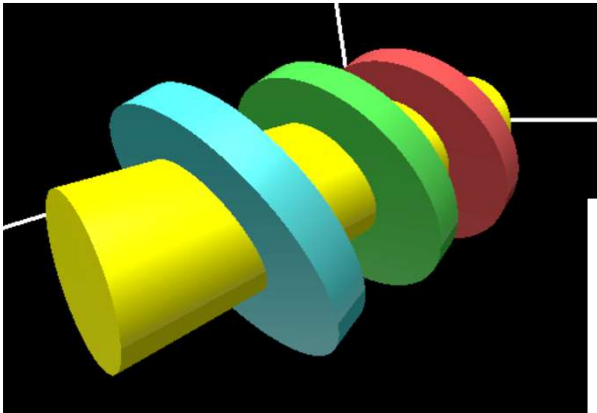

8

**Pass #2: Render the 3D Scene and Adjust the Lighting Anywhere the SSAO Conditions are Right****RenderWithNZ.vert**

```

#version 330 compatibility


uniform mat4  uAnim;
uniform mat4  uModelView;
uniform mat4  uProj;
uniform float uLightX;
uniform float uLightY;
uniform float uLightZ;

out vec3 vNs;
out vec3 vLs;
out vec3 vEs;
out vec4 vP;

void
main()
{
    vec3 LightPosition = vec3(uLightX, uLightY, uLightZ);
    vec4 ECposition = uModelView * uAnim * gl_Vertex;
    vec3 tnorm = normalize( mat3(uModelView*uAnim) * gl_Normal );
    vNs = tnorm;
    vLs = LightPosition - ECposition.xyz;
    vEs = vec3( 0., 0., 0. ) - ECposition.xyz;

    vP = uProj * uModelView * uAnim * gl_Vertex; // need the projection matrix to put z values in the proper range
    gl_Position = vP;
}

```



mjb - January 20, 2022

9

**Pass #2: Render the 3D Scene and Adjust the Lighting Anywhere the SSAO Conditions are Right****RenderWithNZ.frag, I**

```

#version 330 compatibility

uniform vec3  uColor;
uniform sampler2D uNZMap;
uniform int   uSSAON;

in vec3 vNs;
in vec3 vLs;
in vec3 vEs;
in vec4 vP;

const float uDelta = 0.0050;
const float uZTol = 0.0010;
const float uNTol = -0.00001;

float Ds, Dt; // change in s and t to get to the next texel
int Nums = 15; // must be an odd number
int Numt = 15; // must be an odd number

const float MININTEN = 0.50;

const vec3 SPECULAR_COLOR = vec3( 1., 1., 1. );
const float SHININESS = 8;
const float KA = 0.20;
const float KD = 0.60;
const float KS = (1.-KA-KD);

```



mjb - January 20, 2022

10

## Pass #2: Render the 3D Scene and Adjust the Lighting Anywhere the SSAO Conditions are Right

### RenderWithNZ.frag, II

```

float
IsInACrevice( vec2 st )
{
    float inten = 1.;
    // get the normal's and z's:
    vec4 rgba00 = texture(uNZMap, st );
    vec3 n00    = normalize(rgba00.rgb);
    float z00   = rgba00.a;
    for( int it = -Numt/2; it <= Numt/2; it++ )
    {
        vec2 newst;
        newst.t = st.t + Dt * float(it);
        for( int is = -Nums/2; is <= Nums/2; is++ )
        {
            if( is==0 && it==0 ) continue;
            newst.s = st.s + Ds * float(is);
            vec4 rgba = texture(uNZMap, newst );
            vec3 n    = normalize(rgba.rgb);
            float z    = rgba.a;
            // we are in a crevice if:
            // 1. the surrounding z values are approximately the same, and,
            // 2. the surrounding normals are approximately different

            if( abs(z00-z) < uZTol && dot( n00, n ) < uNTol )
            {
                float i = 1. - MININTEN * float( abs(is) + abs(it) ) / float( Nums/2 + Numt/2 );
                if( i < inten )
                    inten = i; // keep the minimum
            }
        }
    }
    return inten;
}

```



January 20, 2022

11

## Pass #2: Render the 3D Scene and Adjust the Lighting Anywhere the SSAO Conditions are Right

### RenderWithNZ.frag, III

```

void
main()
{
    vec2 numtexels = textureSize( uNZMap, 0 );
    Ds = 1. / numtexels.s;
    Dt = 1. / numtexels.t;
    vec3 normal = normalize(vNs);
    vec3 light  = normalize(vLS);
    vec3 eye    = normalize(vEs);

    // have to manually do homogenous division to make position in range of -1 to 1:
    vec2 st = vP.xy / vP.w; // in the range -1. to 1.
    st = vec2(0.5,0.5) * ( st + vec2(1.,1.) ); // now in the range 0. to 1. so can use as a texture lookup

    // get the normal and z at the uNZMap texture coords (st.s,st.t)

    float Inten = 1.;
    if( uSSAOOn != 0 )
        Inten = IsInACrevice( st );

    vec3 lighting = KA * uColor;
    float d = dot(normal,light);

    ... Lighting ...


    gl_FragColor = vec4( Inten * lighting, 1. );
}

```




ngp - January 20, 2022


12

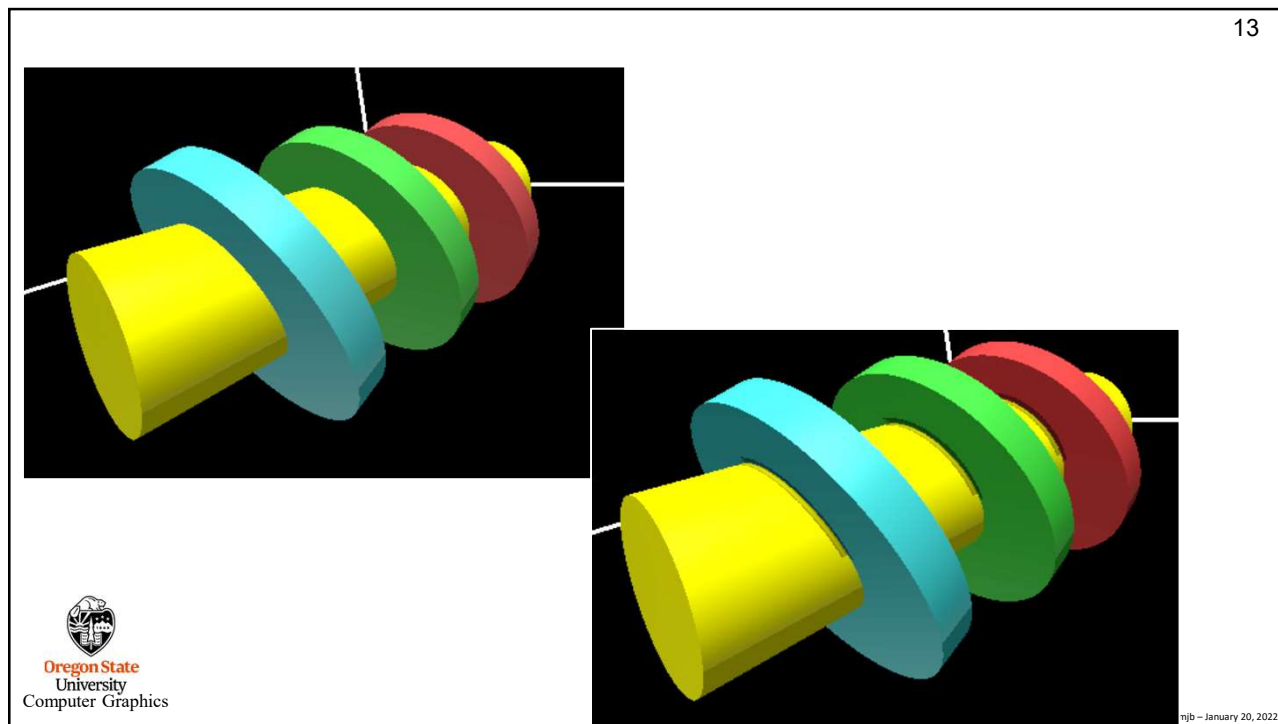

13

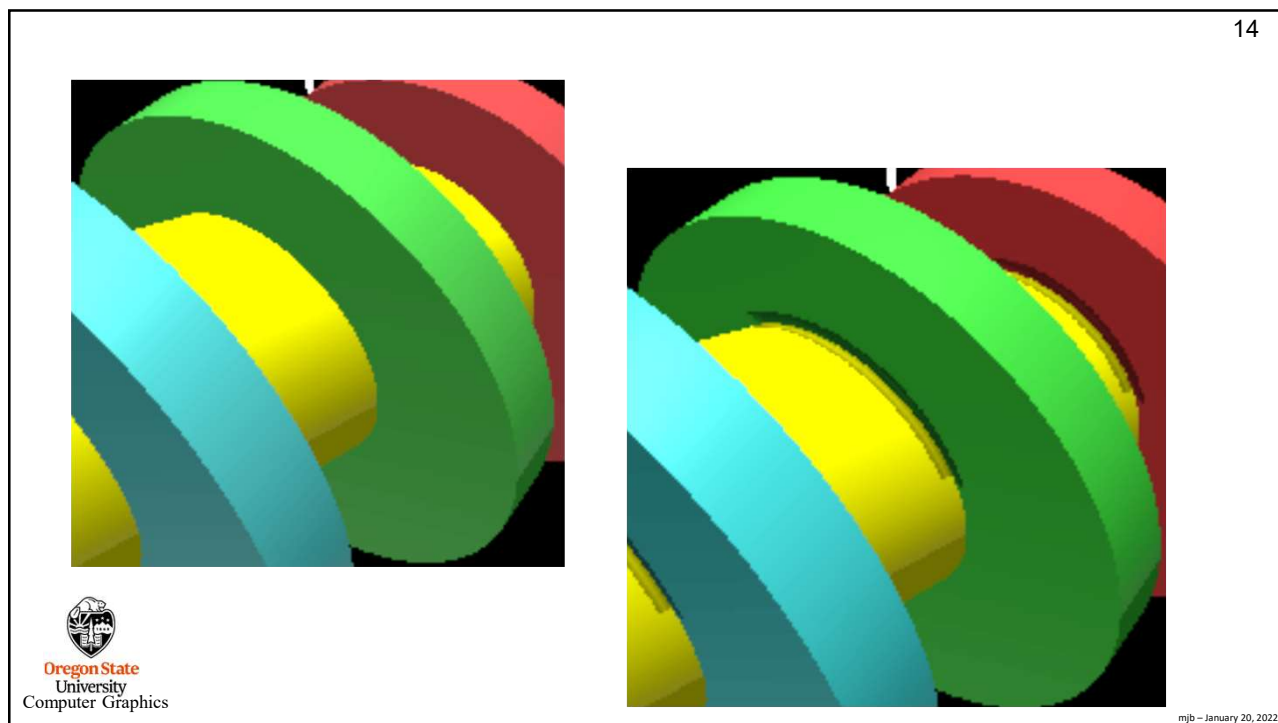

14

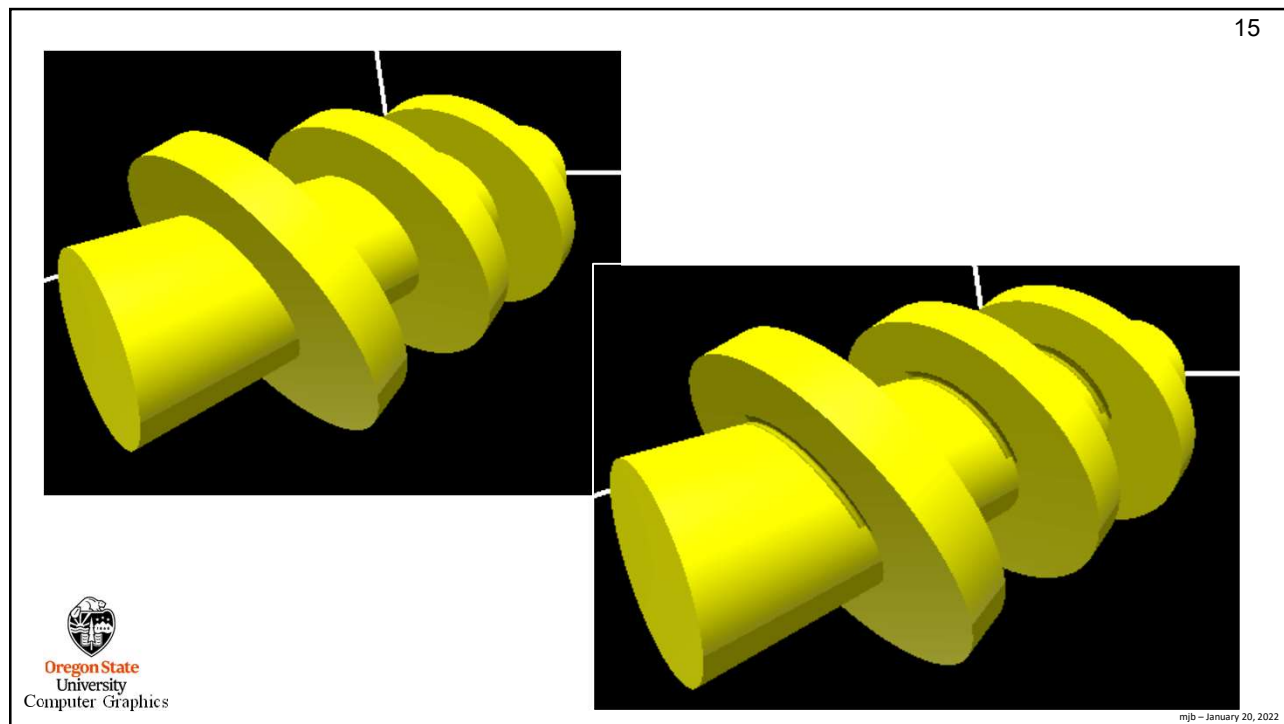

15

16

### How to Display the Colored Normal Vectors

#### DisplayNMap.vert

```
#version 330 compatibility

uniform mat4 uModel;
uniform mat4 uView;
uniform mat4 uProj;

out vec4 vP;

void
main()
{
    vP = uProj * uView * uModel * gl_Vertex;
    gl_Position = vP;
}
```

#### DisplayNMap.frag

```
#version 330 compatibility

uniform sampler2D uNZMap;
in vec4 vP;

void
main()
{
    vec2 st = vP.xy / vP.w; // in the range -1. to 1.
    st = vec2(0.5,0.5) * ( st + vec2(1.,1.) );
    // now in the range 0. to 1. so can use it for a texture lookup

    // get the normal at the uNZMap texture coords (st.s,st.t)
    vec3 n = texture( uNZMap, st ).rgb; // in the range -1. to +1.
    n = abs(n); // in the range 0. to +1.
    gl_FragColor = vec4( n, 1. ); // display normal components as rgb
}
```

mjb - January 20, 2022

16




**DisplayZMap.vert**
**How to Display the Grayscale Depth Values**
17

```
#version 330 compatibility

uniform mat4 uModel;
uniform mat4 uView;
uniform mat4 uProj;

out vec4 vP;

void
main()
{
    vP = uProj * uView * uModel * gl_Vertex;
    gl_Position = vP;
}
```

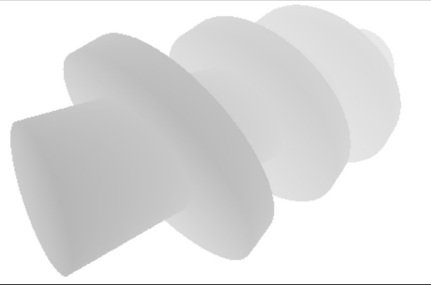


**DisplayZMap.frag**

```
#version 330 compatibility

uniform sampler2D uNZMap;
in vec4 vP;

void
main( )
{
    vec2 st = vP.xy / vP.w; // in the range -1. to 1.
    st = vec2(0.5,0.5) * ( st + vec2(1.,1.) );
    // now in the range 0. to 1. so can use in a texture lookup

    // get the z at the uNZMap texture coords (st.s,st.t)
    float Z = texture( uNZMap, st ).a;
    Z = 0.5 * ( Z + 1. ); // now in the range 0. to 1.
    gl_FragColor = vec4( Z, Z, Z, 1. ); // greyscale
}
```



mjb - January 20, 2022