1

Using Vertex Shaders for Hyperbolic Geometry

Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu





2

Zooming and Panning Around a Complex 2D Display

- Standard (Euclidean) geometry zooming forces much of the information off the screen
- This eliminates the context from the zoomed-in display
- This problem can be solved with *hyperbolic methods* if we are willing to give up Euclidean geometry
- At one time, this would have also meant severely giving up graphics performance, but not now (thanks to shaders)





3

Zooming in *Euclidean* Hyperbolic Space

123,101 line strips
446,585 points

4

Zooming in *Polar* Hyperbolic Space

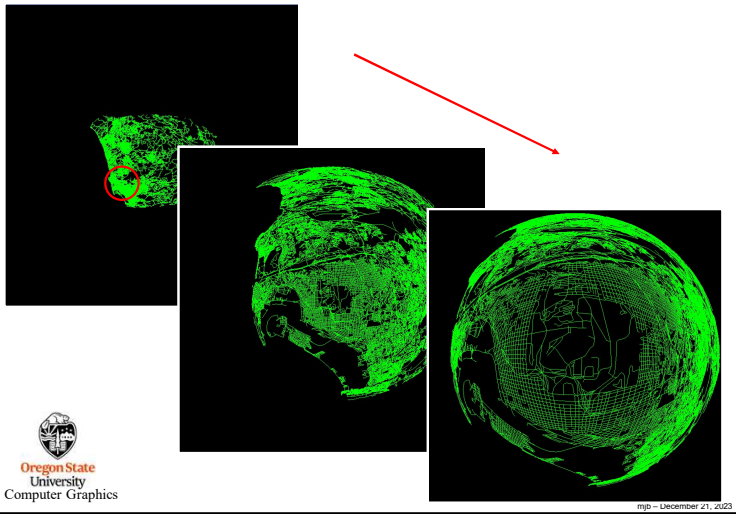

Polar Hyperbolic Equations

5

Overall theme: something divided by something a little bigger

$$\lim_{K \to 0} R' = 1 \qquad \lim_{K \to \infty} R' = 0$$

(X,Y) → R → R' = R / (R+K)

(X,Y) → Θ → Θ' = Θ

R' = R / (R+K), Θ' = Θ → X' = R'cosΘ', Y' = R'sinΘ'

Oregon State University Computer Graphics

The Effect of K

6

K = 0.



$$\lim_{K \to 0} R' = 1 \qquad \lim_{K \to \infty} R' = 0$$

K = 1.



K = 10.

Oregon State University Computer Graphics

Polar Hyperbolic Equations

7

$$R = \sqrt{X^2 + Y^2}$$

$$\Theta = \tan^{-1}\left(\frac{Y}{X}\right)$$

But, fortunately, we don't actually need to ever call the atan( ) function because there are shortcuts to get what we need:

$$\cos\Theta = \frac{X}{R} \qquad \sin\Theta = \frac{Y}{R}$$

$$R' = \frac{R}{R+K}$$

Coordinates moved to outer edge when K = 0

Coordinates moved to center when K = ∞

$$X' = R'\cos\Theta = \frac{R}{R+K} \times \frac{X}{R} = \frac{X}{R+K}$$

$$Y' = R'\sin\Theta = \frac{R}{R+K} \times \frac{Y}{R} = \frac{Y}{R+K}$$

Oregon State University Computer Graphics

Cartesian Hyperbolic Equations

8

Polar:

$$X' = \frac{X}{R+K} \qquad Y' = \frac{Y}{R+K}$$

Coordinates moved to outer edge when K = 0

Coordinates moved to center when K = ∞

Cartesian:

$$X' = \frac{X}{\sqrt{X^2 + K^2}} \qquad Y' = \frac{Y}{\sqrt{Y^2 + K^2}}$$

Coordinates moved to outer edge when K = 0

Coordinates moved to center when K = ∞

Oregon State University Computer Graphics

Zooming in Cartesian Hyperbolic Space

9

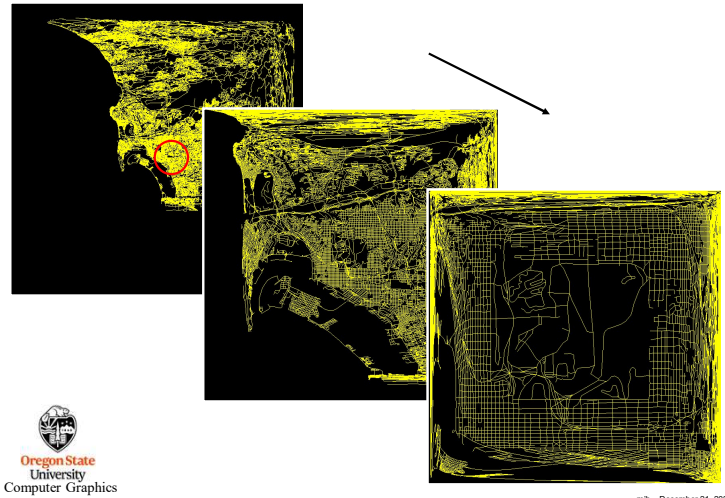

Oregon State University
Computer Graphics

mjb – December 21, 2023

hyper.vert

10

```
#version 330 compatibility
uniform bool        uPolar;
uniform float       uK;
uniform float       uTransX;
uniform float       uTransY;
out vec3            vColor;

void
main( void )
{
        vColor = gl_Color.rgb;

        vec2 pos = ( gl_ModelViewMatrix * gl_Vertex ).xy;
        pos += vec2( uTransX, uTransY );
        float r = length( pos.xyz );

        vec4 pos2 = vec4( 0., 0., -5., 1. );

        if( uPolar )
                pos2.xy = pos / ( r + uK );
        else
                pos2.xy = pos / ( pos*pos + uK*uK );

        gl_Position = gl_ProjectionMatrix * pos2;
}
```

Oregon State University
Computer Graphics

mjb – December 21, 2023

hyper.frag

11

```
#version 330 compatibility
in vec3    vColor;

void
main(  )
{
        gl_FragColor = vec4( vColor, 1. );
}
```

Oregon State University
Computer Graphics

mjb – December 21, 2023

Corvallis Streets, Buildings, Parks

12

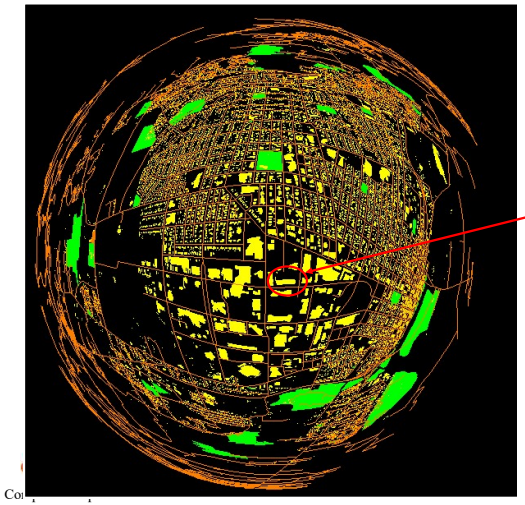

Kelley Engineering Center

Data courtesy of the Corvallis Fire Department

mjb – December 21, 2023

Kelley Engineering Center

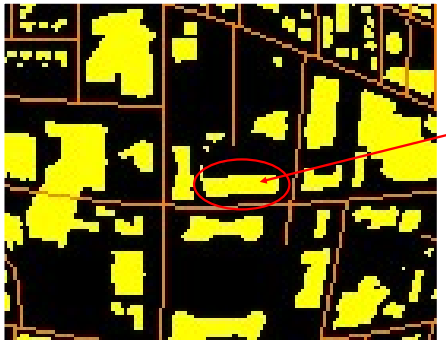

Data courtesy of the
Corvallis Fire Department

Oregon State
University
Computer Graphics