




**Drawing**




**Oregon State University**  
Mike Bailey  
mb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/).







Drawing.pptx      mjb - September 17, 2018

### Vulkan Topologies


**VK\_PRIMITIVE\_TOPOLOGY\_POINT\_LIST**




**VK\_PRIMITIVE\_TOPOLOGY\_TRIANGLE\_LIST**




**VK\_PRIMITIVE\_TOPOLOGY\_LINE\_LIST**




**VK\_PRIMITIVE\_TOPOLOGY\_TRIANGLE\_STRIP**




**VK\_PRIMITIVE\_TOPOLOGY\_LINE\_STRIP**









**VK\_PRIMITIVE\_TOPOLOGY\_TRIANGLE\_FAN**






mjb - September 17, 2018

### Vulkan Topologies



```

typedef enum VkPrimitiveTopology
{
    VK_PRIMITIVE_TOPOLOGY_POINT_LIST
    VK_PRIMITIVE_TOPOLOGY_LINE_LIST
    VK_PRIMITIVE_TOPOLOGY_LINE_STRIP
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_FAN
    VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY
    VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY
    VK_PRIMITIVE_TOPOLOGY_PATCH_LIST
} VkPrimitiveTopology;
    
```



mjb - September 17, 2018

### A Colored Cube Example

```


static GLfloat CubeColors[ ][3] =
{
    { 0.0, 0.0, },
    { 1.0, 0.0, },
    { 0.0, 1.0, },
    { 1.0, 1.0, },
    { 0.0, 0.1, },
    { 1.0, 0.1, },
    { 0.1, 1.0, },
    { 1.1, 1.0, },
};
        
```

```

static GLfloat CubeVertices[ ][3] =
{
    { -1.0, -1.0, -1.0 },
    { 1.0, -1.0, -1.0 },
    { -1.0, 1.0, -1.0 },
    { 1.0, 1.0, -1.0 },
    { -1.0, -1.0, 1.0 },
    { 1.0, -1.0, 1.0 },
    { -1.0, 1.0, 1.0 },
    { 1.0, 1.0, 1.0 },
};
        
```

```

static GLuint CubeTriangleIndices[ ][3] =
{
    { 0, 2, 3 },
    { 0, 3, 1 },
    { 4, 5, 7 },
    { 4, 7, 6 },
    { 1, 3, 7 },
    { 1, 7, 5 },
    { 0, 6, 2 },
    { 0, 6, 7 },
    { 2, 7, 3 },
    { 0, 1, 5 },
    { 0, 5, 4 },
};
        
```




mjb - September 17, 2018

### Triangles Represented as an Array of Structures


```


From the file SampleVertexData.cpp:
struct vertex
{
    glm::vec3 position;
    glm::vec3 normal;
    glm::vec3 color;
    glm::vec2 texCoord;
};

struct vertex VertexData[ ] =
{
    // triangle 0-2-3:
    // vertex #0:
    { -1.0, -1.0, -1.0 },
    { 0.0, 0.0, -1.0 },
    { 0.0, 0.0, 0.0 },
    { 1.0, 0.0 },
},
    // vertex #2:
    { -1.0, 1.0, -1.0 },
    { 0.0, 0.0, -1.0 },
    { 0.0, 1.0, 0.0 },
    { 1.0, 1.0 },
},
    // vertex #3:
    { 1.0, 1.0, -1.0 },
    { 0.0, 0.0, -1.0 },
    { 1.0, 1.0, 0.0 },
    { 0.0, 1.0 },
},
};
    
```



Modeled in right-handed coordinates






mjb - September 17, 2018

### Non-indexed Buffer Drawing

```


From the file SampleVertexData.cpp:
struct vertex
{
    glm::vec3 position;
    glm::vec3 normal;
    glm::vec3 color;
    glm::vec2 texCoord;
};

struct vertex VertexData[ ] =
{
    // triangle 0-2-3:
    // vertex #0:
    { -1.0, -1.0, -1.0 },
    { 0.0, 0.0, -1.0 },
    { 0.0, 0.0, 0.0 },
    { 1.0, 0.0 },
},
    // vertex #2:
    { -1.0, 1.0, -1.0 },
    { 0.0, 0.0, -1.0 },
    { 0.0, 1.0, 0.0 },
    { 1.0, 1.0 },
},
    // vertex #3:
    { 1.0, 1.0, -1.0 },
    { 0.0, 0.0, -1.0 },
    { 1.0, 1.0, 0.0 },
    { 0.0, 1.0 },
},
};
    
```



Triangles

Draw



mjb - September 17, 2018


### Filling the Vertex Buffer

```

MyBuffer    MyVertexDataBuffer;

Init05MyVertexDataBuffer( sizeof(VertexData), &MyVertexDataBuffer );
Fill05DataBuffer( MyVertexDataBuffer, (void *) VertexData );

VkResult
Init05MyVertexDataBuffer( IN VkDeviceSize size, OUT MyBuffer * pMyBuffer )
{
    VkResult result;
    result = Init05DataBuffer( size, VK_BUFFER_USAGE_VERTEX_BUFFER_BIT, pMyBuffer );
    return result;
}
    
```

 Oregon State University  
Computer Graphics

mjb - September 17, 2018

### A Reminder of What Init05DataBuffer Does

```


VkResult
Init05DataBuffer( VkDeviceSize size, VkBufferUsageFlags usage, OUT MyBuffer * pMyBuffer )
{
    VkResult result = VK_SUCCESS;
    VkBufferCreateInfo vbc;
    vbc.sType = VK_STRUCTURE_TYPE_BUFFER_CREATE_INFO;
    vbc.pNext = nullptr;
    vbc.flags = 0;
    vbc.size = pMyBuffer->size = size;
    vbc.usage = usage;
    vbc.sharingMode = VK_SHARING_MODE_EXCLUSIVE;
    vbc.queueFamilyIndexCount = 0;
    vbc.pQueueFamilyIndices = (const uint32_t *) nullptr;
    result = vkCreateBuffer( LogicalDevice, IN &vbc, PALLOCATOR, OUT &pMyBuffer->buffer );

    VkMemoryRequirements vmr;
    vkGetBufferMemoryRequirements( LogicalDevice, IN pMyBuffer->buffer, OUT &vmr ); // fills vmr

    VkMemoryAllocateInfo vmai;
    vmai.sType = VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_INFO;
    vmai.pNext = nullptr;
    vmai.allocationSize = vmr.size;
    vmai.memoryTypeIndex = FindMemoryThatIsHostVisible( );

    VkDeviceMemory vdm;
    result = vkAllocateMemory( LogicalDevice, IN &vmai, PALLOCATOR, OUT &vdm );
    pMyBuffer->vdm = vdm;

    result = vkBindBufferMemory( LogicalDevice, pMyBuffer->buffer, IN vdm, 0 ); // 0 is the offset
    return result;
}
    
```

 Oregon State University  
Computer Graphics

mjb - September 17, 2018

### Telling the Pipeline about its Input

We will come to the Pipeline later, but for now, know that a Vulkan pipeline is essentially a very large data structure that holds (what OpenGL would call) the state, including how to parse its input.

**C/C++:**

```

struct vertex
{
    glm::vec3 position;
    glm::vec3 normal;
    glm::vec3 color;
    glm::vec2 texCoord;
};
                
```

→


**GLSL Shader:**

```

layout( location = 0 ) in vec3 aVertex;
layout( location = 1 ) in vec3 aNormal;
layout( location = 2 ) in vec3 aColor;
layout( location = 3 ) in vec2 aTexCoord;
                
```

```

VkVertexInputBindingDescription vbvbd[1]; // one of these per buffer data buffer
vbvbd[0].binding = 0; // which binding # this is
vbvbd[0].stride = sizeof( struct vertex ); // bytes between successive structs
vbvbd[0].inputRate = VK_VERTEX_INPUT_RATE_VERTEX;
                
```

 Oregon State University  
Computer Graphics

mjb - September 17, 2018

### Telling the Pipeline about its Input

```

struct vertex
{
    glm::vec3 position;
    glm::vec3 normal;
    glm::vec3 color;
    glm::vec2 texCoord;
};
                
```

→

```

layout( location = 0 ) in vec3 aVertex;
layout( location = 1 ) in vec3 aNormal;
layout( location = 2 ) in vec3 aColor;
layout( location = 3 ) in vec2 aTexCoord;
                
```


```

VkVertexInputAttributeDescription vviad[4]; // array per vertex input attribute
// 4 = vertex, normal, color, texture coord
vviad[0].location = 0; // location in the layout decoration
vviad[0].binding = 0; // which binding description this is part of
vviad[0].format = VK_FORMAT_VEC3; // x, y, z
vviad[0].offset = offsetof( struct vertex, position ); // 0

vviad[1].location = 1;
vviad[1].binding = 0;
vviad[1].format = VK_FORMAT_VEC3; // nx, ny, nz
vviad[1].offset = offsetof( struct vertex, normal ); // 12

vviad[2].location = 2;
vviad[2].binding = 0;
vviad[2].format = VK_FORMAT_VEC3; // r, g, b
vviad[2].offset = offsetof( struct vertex, color ); // 24

vviad[3].location = 3;
vviad[3].binding = 0;
vviad[3].format = VK_FORMAT_VEC2; // s, t
vviad[3].offset = offsetof( struct vertex, texCoord ); // 36
                
```

 Oregon State University  
Computer Graphics

mjb - September 17, 2018


### Telling the Pipeline about its Input

We will come to the Pipeline later, but for now, know that a Vulkan Pipeline is essentially a very large data structure that holds (what OpenGL would call) the state, including how to parse its input.

```

VkPipelineVertexInputStateCreateInfo vpvisci; // used to describe the input vertex attributes
vpvisci.sType = VK_STRUCTURE_TYPE_PIPELINE_VERTEX_INPUT_STATE_CREATE_INFO;
vpvisci.pNext = nullptr;
vpvisci.flags = 0;
vpvisci.vertexBindingDescriptionCount = 1;
vpvisci.pVertexBindingDescriptions = &vbvbd;
vpvisci.vertexAttributeDescriptionCount = 4;
vpvisci.pVertexAttributeDescriptions = &vviad;

VkPipelineInputAssemblyStateCreateInfo vpiasci;
vpiasci.sType = VK_STRUCTURE_TYPE_PIPELINE_INPUT_ASSEMBLY_STATE_CREATE_INFO;
vpiasci.pNext = nullptr;
vpiasci.flags = 0;
vpiasci.topology = VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST;;
                
```

 Oregon State University  
Computer Graphics

mjb - September 17, 2018


### Telling the Pipeline about its Input

We will come to the Pipeline later, but for now, know that a Vulkan Pipeline is essentially a very large data structure that holds (what OpenGL would call) the state, including how to parse its input.

```

VkGraphicsPipelineCreateInfo vgpcci;
vgpcci.sType = VK_STRUCTURE_TYPE_GRAPHICS_PIPELINE_CREATE_INFO;
vgpcci.pNext = nullptr;
vgpcci.flags = 0;
vgpcci.stageCount = 2; // number of shader stages in this pipeline
vgpcci.pStages = vpvssci;
vgpcci.pVertexInputState = &vpvisci;
vgpcci.pInputAssemblyState = &vpiasci;
vgpcci.pTessellationState = (VkPipelineTessellationStateCreateInfo *) nullptr; // &vtpsc
vgpcci.pViewportState = &vpvsci;
vgpcci.pRasterizationState = &vprsci;
vgpcci.pMultisampleState = &vpmsci;
vgpcci.pDepthStencilState = &vpdsci;
vgpcci.pColorBlendState = &vpcbsci;
vgpcci.pDynamicState = &vpdsci;
vgpcci.layout = IN GraphicsPipelineLayout;
vgpcci.renderPass = IN RenderPass;
vgpcci.subpass = 0; // subpass number
vgpcci.basePipelineHandle = (VkPipeline) VK_NULL_HANDLE;
vgpcci.basePipelineIndex = 0;

result = vkCreateGraphicsPipelines( LogicalDevice, VK_NULL_HANDLE, 1, IN &vgpcci,
PALLOCATOR, OUT pGraphicsPipeline );
                
```

 Oregon State University  
Computer Graphics

mjb - September 17, 2018


### Telling the Command Buffer what Vertices to Draw

13

We will come to Command Buffers later, but for now, know that you will specify the vertex buffer that you want drawn.

```

VkBuffer buffers[1] = MyVertexDataBuffer.buffer;
vkCmdBindVertexBuffers( CommandBuffers[nextImageIndex], 0, 1, vertexDataBuffers, offsets );
const uint32_t vertexCount = sizeof( VertexData ) / sizeof( VertexData[0] );
const uint32_t instanceCount = 1;
const uint32_t firstVertex = 0;
const uint32_t firstInstance = 0;
vkCmdDraw( CommandBuffers[nextImageIndex], vertexCount, instanceCount, firstVertex, firstInstance );
    
```



mjb - September 17, 2018

### Drawing with an Indexed Buffer

14

```

struct vertex JustVertexData[] =
{
    // vertex #0:
    { -1, -1, -1 },
    { 0, 0, -1 },
    { 0, 0, 0 },
    { 1, 0, 0 },
},
    // vertex #1:
    { 1, -1, -1 },
    { 0, 0, -1 },
    { 1, 0, 0 },
    { 0, 0, 0 },
},
    ...
int JustIndexData[] =
{
    0, 2, 3,
    0, 3, 1,
    4, 5, 7,
    4, 7, 6,
    1, 3, 7,
    1, 7, 5,
    0, 4, 6,
    0, 6, 2,
    2, 6, 7,
    2, 7, 3,
    0, 1, 5,
    0, 5, 4,
};
    
```

Transmission Order
8
7
6
5
4
3
2
1
0

Index
Index 7
Index 5
Index 4
Index 1
Index 3
Index 0
Index 3
Index 2
Index 0

Actual Index Data

Triangle 4-5-7


Triangle 0-3-1

Triangle 0-2-3

Triangles

↓

Draw



mjb - September 17, 2018

### Drawing with an Indexed Buffer

15

```

vkCmdBindVertexBuffers( commandBuffer, firstBinding, bindingCount, vertexDataBuffers, vertexOffsets );
vkCmdBindIndexBuffer( commandBuffer, indexDataBuffer, indexOffset, indexType );
    
```


```

typedef enum VkIndexType
{
    VK_INDEX_TYPE_UINT16 = 0, // 0 - 65,535
    VK_INDEX_TYPE_UINT32 = 1, // 0 - 4,294,967,295
} VkIndexType;
    
```

```

vkCmdDrawIndexed( commandBuffer, indexCount, instanceCount, firstIndex, vertexOffset, firstInstance );
    
```

Remember that integer-indexed buffers are just BLOBs too.



mjb - September 17, 2018

### Drawing with an Indexed Buffer

16


```

VkResult
Init05MyIndexDataBuffer( IN VkDeviceSize size, OUT MyBuffer * pMyBuffer )
{
    VkResult result = Init05DataBuffer( size, VK_BUFFER_USAGE_INDEX_BUFFER_BIT, pMyBuffer );
    // fills pMyBuffer

    return result;
}
    
```

```

Init05MyVertexDataBuffer( sizeof(JustVertexData), &MyJustVertexDataBuffer );
Fill05DataBuffer( MyJustVertexDataBuffer, (void *) JustVertexData );
Init05MyIndexDataBuffer( sizeof(JustIndexData), &MyJustIndexDataBuffer );
Fill05DataBuffer( MyJustIndexDataBuffer, (void *) JustIndexData );
    
```



mjb - September 17, 2018


### Drawing with an Indexed Buffer

17

```

VkBuffer vBuffers[1] = { MyJustVertexDataBuffer.buffer };
VkBuffer iBuffer = { MyJustIndexDataBuffer.buffer };
vkCmdBindVertexBuffers( CommandBuffers[nextImageIndex], 0, 1, vBuffers, offsets );
// 0, 1 = firstBinding, bindingCount
vkCmdBindIndexBuffer( CommandBuffers[nextImageIndex], iBuffer, 0, VK_INDEX_TYPE_UINT32 );
const uint32_t vertexCount = sizeof(JustVertexData) / sizeof(JustVertexData[0]);
const uint32_t indexCount = sizeof(JustIndexData) / sizeof(JustIndexData[0]);
const uint32_t instanceCount = 1;
const uint32_t firstVertex = 0;
const uint32_t firstIndex = 0;
const uint32_t firstInstance = 0;
const uint32_t vertexOffset = 0;
#ifdef VERTEX_BUFFER
    vkCmdDraw( CommandBuffers[nextImageIndex], vertexCount, instanceCount, firstVertex, firstInstance );
#endif
#ifdef INDEX_BUFFER
    vkCmdDrawIndexed( CommandBuffers[nextImageIndex], indexCount, instanceCount, firstIndex, vertexOffset, firstInstance );
#endif
    
```

Note that there is no vertex-count! It is up to you to not exceed the number of vertices with your index numbers!



mjb - September 17, 2018

### Indirect Drawing (not to be confused with Indexed)

18

```

typedef struct
{
    uint32_t vertexCount;
    uint32_t instanceCount;
    uint32_t firstVertex;
    uint32_t firstInstance;
} VkDrawIndirectCommand;
    
```


```

vkCmdDrawIndirect( CommandBuffers[nextImageIndex], buffer, offset, drawCount, stride );
    
```

Compare this with:

```

vkCmdDraw( CommandBuffers[nextImageIndex], vertexCount, instanceCount, firstVertex, firstInstance );
    
```



mjb - September 17, 2018


### Indexed Indirect Drawing (i.e., both Indexed and Indirect)

```
vkCmdDrawIndexedIndirect( commandBuffer, buffer, offset, drawCount, stride );
```

```
typedef struct
VkDrawIndexedIndirectCommand
{
    uint32_t indexCount;
    uint32_t instanceCount;
    uint32_t firstIndex;
    int32_t vertexOffset;
    uint32_t firstInstance;
} VkDrawIndexedIndirectCommand;
```

Compare this with:


```
vkCmdDrawIndexed( commandBuffer, indexCount, instanceCount, firstIndex, vertexOffset, firstInstance );
```



Computer Graphics

mjb - September 17, 2018


### Sometimes the Same Point Needs Multiple Attributes

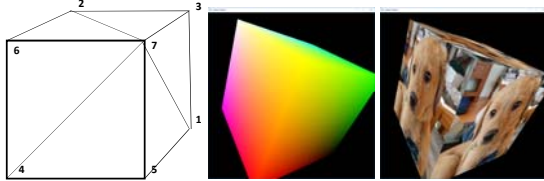

Sometimes a point that is common to multiple faces has the same attributes, no matter what face it is in. Sometimes it doesn't.

A color-interpolated cube like this actually has both. Point #7 above has the same color, regardless of what face it is in. However, Point #7 has 3 different normal vectors, depending on which face you are defining. Same with its texture coordinates.


Thus, when using index-ed buffer drawing, you need to create a new vertex struct if any of (position, normal, color, texCoords) changes from what was previously-stored at those coordinates.



Computer Graphics


mjb - September 17, 2018

### Sometimes the Same Point Needs Multiple Attributes

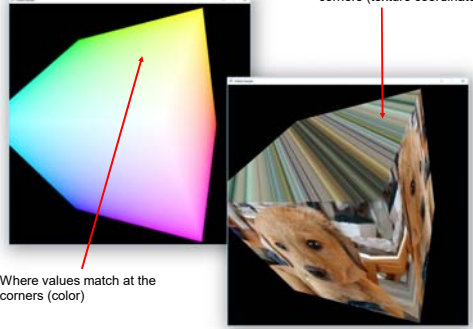

Where values do not match at the corners (texture coordinates)


Where values match at the corners (color)



Computer Graphics

mjb - September 17, 2018


### The OBJ File Format – a triple-indexed way of Drawing



```
v 1.710541 1.283360 -0.040860
v 1.714593 1.273043 -0.041268
v 1.706114 1.279109 -0.040795
v 1.719083 1.277235 -0.041195
v 1.722786 1.267216 -0.041939
v 1.727196 1.271285 -0.041795
v 1.730680 1.261384 -0.042630
v 1.723121 1.280378 -0.037323
v 1.714513 1.286599 -0.037101
v 1.706156 1.283797 -0.037073
v 1.702207 1.290297 -0.040704
v 1.697843 1.285852 -0.040489
v 1.709169 1.285845 -0.029862
v 1.717523 1.288344 -0.029807
...
vn 0.1725 0.2557 -0.9512
vn -0.1979 -0.1899 -0.9616
vn -0.2050 -0.2127 -0.9554
vn 0.1664 0.3020 -0.9387
vn -0.2040 -0.1718 -0.9638
vn 0.1645 0.3203 -0.9329
vn -0.2055 -0.1698 -0.9638
vn 0.4419 0.6436 -0.6249
vn 0.4573 0.5682 -0.6841
vn 0.5160 0.5538 -0.6535
vn 0.1781 0.2082 -0.9616
vn -0.2187 -0.2250 -0.9499
vn 0.6624 0.6871 -0.2987
...
vt 0.816406 0.955336
vt 0.822754 0.959168
vt 0.815918 0.959442
vt 0.823242 0.955292
vt 0.829102 0.958862
vt 0.829590 0.955109
vt 0.835449 0.958618
vt 0.824219 0.951263
vt 0.817383 0.951538
vt 0.810059 0.951385
vt 0.809570 0.955383
vt 0.809082 0.959320
vt 0.811035 0.946391
...
f 73/73/75 65/65/67 66/66/68
f 66/66/68 74/74/76 73/73/75
f 74/74/76 68/68/68 67/67/69
f 67/67/69 75/75/77 74/74/76
f 75/75/77 67/67/69 69/69/71
f 69/69/71 76/76/78 75/75/77
f 77/77/79 72/72/74 77/77/79
f 72/72/74 78/78/80 77/77/79
f 78/78/80 72/72/74 73/73/75
f 73/73/75 79/79/81 78/78/80
f 79/79/81 73/73/75 74/74/76
f 74/74/76 80/80/82 79/79/81
f 80/80/82 74/74/76 75/75/77
f 75/75/77 81/81/83 80/80/82
```

V / T / N

Note: The OBJ file format uses 1-based indexing for faces!



Computer Graphics

mjb - September 17, 2018