




1




Dynamic State Variables



Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



DynamicState/variables.pptx

mjb - September 18, 2018


2

Creating a Pipeline with Dynamically Changeable State Variables

The graphics pipeline is full of state information, and, as previously-discussed, is immutable, that is, the information contained inside it is fixed, and can only be changed by creating a new graphics pipeline with new information.

That isn't quite true. To a certain extent, you can declare parts of the pipeline state changeable. This allows you to change pipeline information on the fly.

This is useful for managing state information that needs to change frequently. This also creates possible optimization opportunities for the Vulkan driver.



mjb - September 18, 2018


3

Which Pipeline State Variables can be Changed Dynamically

The possible uses for dynamic variables are shown in the **VkDynamicState** enum:

```

VK_DYNAMIC_STATE_VIEWPORT
VK_DYNAMIC_STATE_SCISSOR
VK_DYNAMIC_STATE_LINE_WIDTH
VK_DYNAMIC_STATE_DEPTH_BIAS
VK_DYNAMIC_STATE_BLEND_CONSTANTS
VK_DYNAMIC_STATE_DEPTH_BOUNDS
VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK
VK_DYNAMIC_STATE_STENCIL_WRITE_MASK
VK_DYNAMIC_STATE_STENCIL_REFERENCE
    
```



mjb - September 18, 2018

4

Creating a Pipeline

```


VkDynamicState          vds[ ] =
{
    VK_DYNAMIC_STATE_VIEWPORT,
    VK_DYNAMIC_STATE_LINE_WIDTH
};

VkPipelineDynamicStateCreateInfo  vpdsci;
vpdsci.sType = VK_STRUCTURE_TYPE_PIPELINE_DYNAMIC_STATE_CREATE_INFO;
vpdsci.pNext = nullptr;
vpdsci.flags = 0;
vpdsci.dynamicStateCount = sizeof(vds) / sizeof(VkDynamicState);
vpdsci.pDynamicStates = &vds;


VkGraphicsPipelineCreateInfo      vgpcci;
...
vgpcci.pDynamicState = &vpdsci;
...

vkCreateGraphicsPipelines( LogicalDevice, pipelineCache, 1, &vgpcci, PALLOCATOR, &GraphicsPipeline );
    
```

If you declare certain state variables to be dynamic like this, then you *must* fill them in the command buffer! Otherwise, they are **undefined** and bad things are likely to happen.



mjb - September 18, 2018

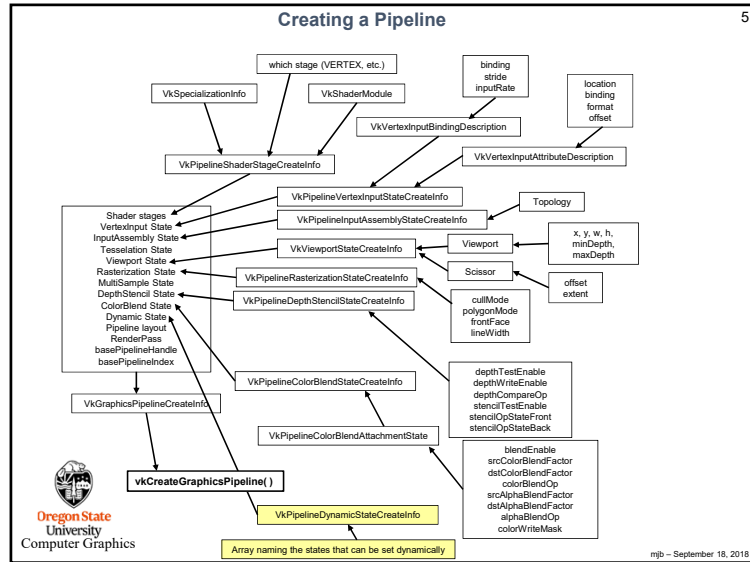

Filling State Variables in the Command Buffer

The command buffer-bound function calls to set these dynamic states are:

```

vkCmdSetViewport( commandBuffer, firstViewport, viewportCount, pViewports );
vkCmdSetScissor( commandBuffer, firstScissor, scissorCount, pScissors );
vkCmdSetLineWidth( commandBuffer, linewidth );
vkCmdSetDepthBias( commandBuffer, depthBiasConstantFactor, depthBiasClamp, depthBiasSlopeFactor );
vkCmdSetBlendConstants( commandBuffer, blendConstants[4] );
vkCmdSetDepthBounds( commandBuffer, minDepthBounds, maxDepthBounds );
vkCmdSetStencilCompareMask( commandBuffer, faceMask, compareMask );
vkCmdSetStencilWriteMask( commandBuffer, faceMask, writeMask );
vkCmdSetStencilReference( commandBuffer, faceMask, reference );
    
```

mjb - September 18, 2018