Introduction to Functional Programming in Haskell

Outline

Outline

Why learn (pure) functional programming?

1. This course: strong correspondence of core concepts to PL theory
   - **abstract syntax** can be represented by **algebraic data types**
   - **denotational semantics** can be represented by **functions**

2. It will make you a better (imperative) programmer
   - forces you to think **recursively** and **compositionally**
   - forces you to **minimize use of state**

   ...essential skills for solving **big** problems

3. It is the future!
   - more scalable and parallelizable (MapReduce)
   - functional features have been added to most mainstream languages
   - many cool new libraries built around functional paradigm

Outline

What is a (pure) function?



A function is **pure** if:

- it always returns the same output for the same inputs
- it doesn't do anything else — no "side effects"

In Haskell: whenever we say "function" we mean a **pure function**!

What are and aren't functions?

Always functions:

- mathematical functions $f(x) = x^2 + 2x + 3$
- encryption and compression algorithms

Usually not functions:

- C, Python, JavaScript, … "functions" (procedures)
- Java, C#, Ruby, … methods

Haskell only allows you to write (pure) functions!

Why procedures/methods aren't functions

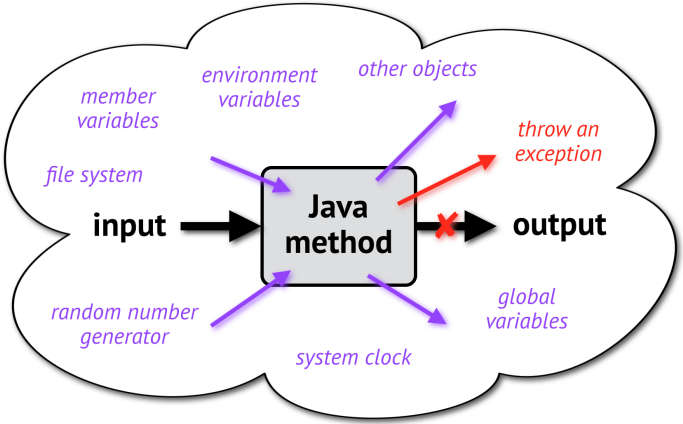

- output depends on environment
- may perform arbitrary side effects

Outline

Getting into the Haskell mindset

Haskell

```
sum :: [Int] -> Int
sum []     = 0
sum (x:xs) = x + sum xs
```

Java

```
int sum(List<Int> xs) {
  int s = 0;
  for (int x : xs) {
    s = s + x;
  }
  return s;
}
```

In Haskell, "**=**" means ***is*** not *change to*!

Getting into the Haskell mindset

Quicksort in Haskell

```
qsort :: Ord a => [a] -> [a]
qsort []     = []
qsort (x:xs) = qsort (filter (<= x) xs)
        ++ x : qsort (filter (>  x) xs)
```

Quicksort in C

```
void qsort(int low, int high) {
  int i = low, j = high;
  int pivot = numbers[low + (high-low)/2];

  while (i <= j) {
    while (numbers[i] < pivot) {
      i++;
    }
    while (numbers[j] > pivot) {
      j--;
    }
    if (i <= j) {
      swap(i, j);
      i++;
      j--;
    }
  }
  if (low < j)
    qsort(low, j);
    qsort(i, high);
}

void swap(int i, int j) {
  int temp = numbers[i];
  numbers[i] = numbers[j];
  numbers[j] = temp;
}
```

Referential transparency

a.k.a. **referent**

An expression can be replaced by its **value**
without changing the overall program behavior

```
      length [1,2,3] + 4
⇒                  3 + 4
```

what if `length` was a Java method?

Corollary: an expression can be replaced by **any expression**
with the same value without changing program behavior

Supports **equational reasoning**

Equational reasoning

Computation is just substitution!

```
sum :: [Int] -> Int
sum []     = 0
sum (x:xs) = x + sum xs
```

equations

```
    sum [2,3,4]
⇒   sum (2:(3:(4:[])))
⇒   2 + sum (3:(4:[]))
⇒   2 + 3 + sum (4:[])
⇒   2 + 3 + 4 + sum []
⇒   2 + 3 + 4 + 0
⇒   9
```

Describing computations

Function definition: a list of **equations** that relate inputs to output

- matched top-to-bottom
- applied left-to-right

Example: reversing a list

imperative view: how do I rearrange the elements in the list? ✗
functional view: how is a list related to its reversal? ✓

```
reverse :: [a] -> [a]
reverse []     = []
reverse (x:xs) = reverse xs ++ [x]
```

Outline

First-order functions

Examples

- `cos :: Float -> Float`
- `even :: Int -> Bool`
- `length :: [a] -> Int`

Higher-order functions

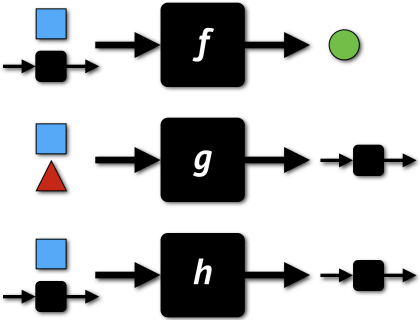

Functional Programmers do it at a higher order!

Examples

- `map :: (a -> b) -> [a] -> [b]`
- `filter :: (a -> Bool) -> [a] -> [a]`
- `(.) :: (b -> c) -> (a -> b) -> a -> c`

Higher-order functions as control structures

map: *loop for doing something to each element in a list*

```
map :: (a -> b) -> [a] -> [b]
map f []     = []
map f (x:xs) = f x : map f xs
```

```
map f [2,3,4,5] = [f 2, f 3, f 4, f 5]
```

```
map even [2,3,4,5]
= [even 2, even 3, even 4, even 5]
= [True,False,True,False]
```

fold: *loop for aggregating elements in a list*

```
foldr :: (a->b->b) -> b -> [a] -> b
foldr f y []     = y
foldr f y (x:xs) = f x (foldr f y xs)
```

```
foldr f y [2,3,4] = f 2 (f 3 (f 4 y))
```

```
foldr (+) 0 [2,3,4]
= (+) 2 ((+) 3 ((+) 4 0))
= 2 + (3 + (4 + 0))
= 9
```

Function composition

Can create new functions by **composing** existing functions

- *apply the second function, then apply the first*

Function composition

```
(.) :: (b -> c) -> (a -> b) -> a -> c
f . g = \x -> f (g x)
```

```
(f . g) x = f (g x)
```

Types of existing functions

```
not  :: Bool -> Bool
succ :: Int -> Int
even :: Int -> Bool
head :: [a] -> a
tail :: [a] -> [a]
```

Definitions of new functions

```
plus2  = succ . succ
odd    = not . even
second = head . tail
drop2  = tail . tail
```

Currying / partial application

In Haskell, functions that take multiple arguments are **implicitly higher order**

Haskell Curry

```
plus :: Int -> Int -> Int
```




```
increment :: Int -> Int
increment = plus 1
```

Curried `plus 2 3`

```
plus :: Int -> Int -> Int
```

Uncurried `plus (2,3)`

```
plus :: (Int,Int) -> Int
```

a pair of ints

Outline

Lazy evaluation

In Haskell, expressions are reduced:

- only when needed
- at most once

Supports:

- infinite data structures
- separation of concerns

```
nats :: [Int]
nats = 1 : map (+1) nats

fact :: Int -> Int
fact n = product (take n nats)
```

```
min3 :: [Int] -> [Int]
min3 = take 3 . sort
```

What is the running time of this function?

John Hughes, *Why Functional Programming Matters*, 1989

Outline

Good Haskell style

Why it matters:

- layout is significant!
- eliminate misconceptions
- we care about *elegance*

Easy stuff:

- **use spaces!** (tabs cause layout errors)
- align patterns and guards

See style guides on course web page

Formatting function applications

Function application:

- is *just a space*
- associates to the left
- binds most strongly


```
f(x)
(f x) y
(f x) + (g y)
```

```
f x
f x y
f x + g y
```

Use parentheses only to *override* this behavior:

- `f (g x)`
- `f (x + y)`

Outline

FP workflow (simple)

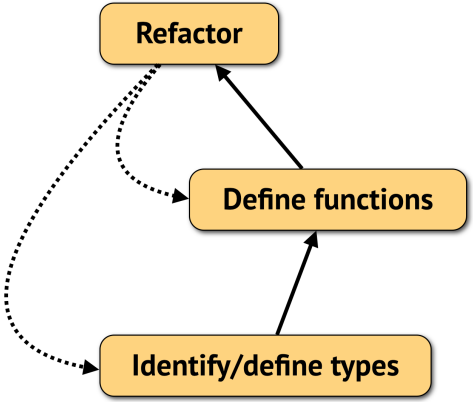

"obsessive compulsive refactoring disorder"

FP workflow (detailed)

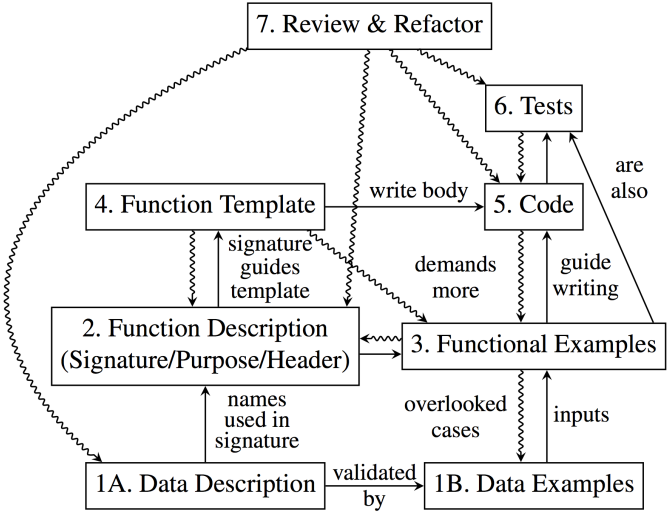

Norman Ramsey, *On Teaching "How to Design Programs"*, ICFP'14

Outline

Algebraic data types

Data type definition

- introduces new **type** of value
- enumerates ways to **construct** values of this type

Some example data types

```
data Bool = True | False

data Nat  = Zero | Succ Nat

data Tree = Node Int Tree Tree
          | Leaf Int
```

Definitions consists of …

- a **type name**
- a list of **data constructors** with **argument types**

Definition is **inductive**

- the arguments may **recursively** include the type being defined
- the constructors are the **only way** to build values of this type

Anatomy of a data type definition

type name

```
data Expr = Lit Int
          | Plus Expr Expr
```

cases

data constructor

types of arguments

Example: $2 + 3 + 4$ `Plus (Lit 2) (Plus (Lit 3) (Lit 4))`

FP data types vs. OO classes

Haskell

```
data Tree = Node Int Tree Tree
          | Leaf
```

Java

```
abstract class Tree { ... }
class Node extends Tree {
  int label;
  Tree left, right;
  ...
}
class Leaf extends Tree { ... }
```

- separation of type- and value-level
- set of cases closed
- set of operations open

- merger of type- and value-level
- set of cases open
- set of operations closed

Extensibility of cases vs. operations = the “expression problem”

Type parameters

(Like generics in Java)

type parameter

```
data List a = Nil
            | Cons a (List a)
```

reference to type parameter

recursive reference to type

Specialized lists

```
type IntList = List Int
type CharList = List Char
type RaggedMatrix a = List (List a)
```

Outline

What is a type class?

1. an **interface** that is supported by many different types
2. a **set of types** that have a common behavior

```
class Eq a where
  (==) :: a -> a -> Bool
```

types whose values can be compared for equality

```
class Show a where
  show :: a -> String
```

types whose values can be shown as strings

```
class Num a where
  (+) :: a -> a -> a
  (*) :: a -> a -> a
  negate :: a -> a
  ...
```

types whose values can be manipulated like numbers

Type constraints

```
class Eq a where
  (==) :: a -> a -> Bool
```

List elements can be of any type

```
length :: [a] -> Int
length []     = 0
length (_:xs) = 1 + length xs
```

List elements must support equality!

```
elem :: Eq a => a -> [a] -> Bool
elem _ []     = False
elem y (x:xs) = x == y || elem y xs
```

use method ⇒ add type class constraint

Outline

Tools for defining functions

Recursion and other functions

```
sum :: [Int] -> Int
sum xs = if null xs then 0
         else head xs + sum (tail xs)
```

Pattern matching

```
sum :: [Int] -> Int
sum []     = 0
sum (x:xs) = x + sum xs
```

(1) case analysis

(2) decomposition

Higher-order functions

```
sum :: [Int] -> Int
sum = foldr (+) 0
```

no recursion or variables needed!

What is type-directed programming?

Use the **type** of a function
to help write its **body**

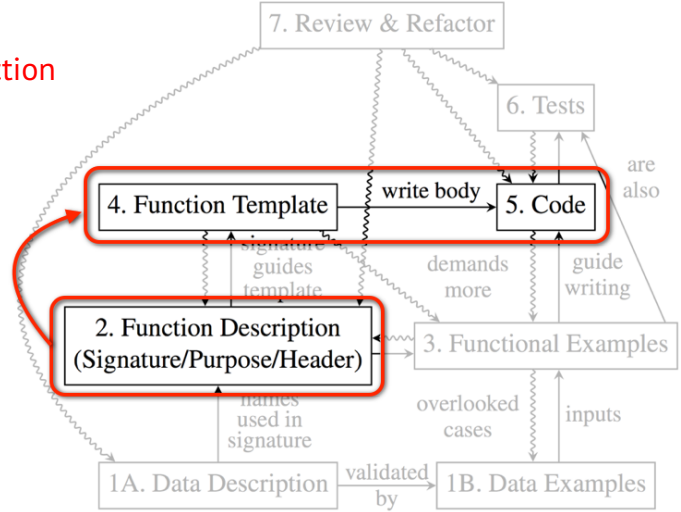

Type-directed programming

Basic goal: transform values of **argument types** into **result type**

If argument type is ...

- **atomic type** (e.g. `Int`, `Char`)
  - apply functions to it
- **algebraic data type**
  - use pattern matching
    - case analysis
    - decompose into parts
- **function type**
  - apply it to something

If result type is ...

- **atomic type**
  - output of another function
- **algebraic data type**
  - build with data constructor
- **function type**
  - function composition or partial application
  - build with lambda abstraction

Outline

Refactoring in the FP workflow

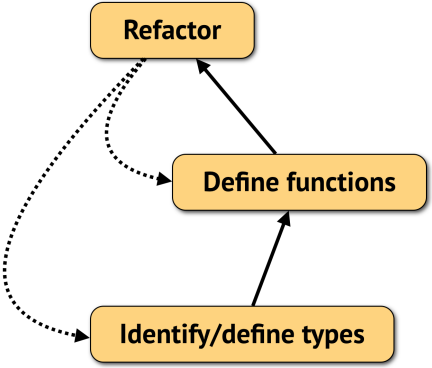

Motivations:

- separate concerns
- promote reuse
- promote understandability
- gain insights

"obsessive compulsive refactoring disorder"

Refactoring relations

Semantics-preserving **laws** *can prove with equational reasoning + induction*

- Eta reduction:
  `\x -> f x` $\equiv$ `f`
- Map–map fusion:
  `map f . map g` $\equiv$ `map (f . g)`
- Fold–map fusion:
  `foldr f b . map g` $\equiv$ `foldr (f . g) b`

"Algebra of computer programs"

John Backus, *Can Programming be Liberated from the von Neumann Style?*, ACM Turing Award Lecture, 1978

Strategy: systematic generalization

```
commas :: [String] -> [String]
commas []     = []
commas [x]    = [x]
commas (x:xs) = x : ", " : commas xs
```

```
commas :: [String] -> [String]
commas = intersperse ", "
```

Introduce parameters for constants

```
seps :: String -> [String] -> [String]
seps _ []     = []
seps _ [x]    = [x]
seps s (x:xs) = x : s : seps s xs
```

Broaden the types

```
intersperse :: a -> [a] -> [a]
intersperse _ []     = []
intersperse _ [x]    = [x]
intersperse s (x:xs) = x : s : intersperse s xs
```

Strategy: abstract repeated templates

abstract (v): extract and make reusable (as a function)

```
showResult :: Maybe Float -> String
showResult Nothing  = "ERROR"
showResult (Just v) = show v

moveCommand :: Maybe Dir -> Command
moveCommand Nothing  = Stay
moveCommand (Just d) = Move d

safeAdd :: Int -> Maybe Int -> Int
safeAdd x Nothing  = x
safeAdd x (Just y) = x + y
```

Repeated structure:

- pattern match
- default value if `Nothing`
- apply function to contents if `Just`

Strategy: abstract repeated templates

Describe repeated structure in function

```
maybe :: b -> (a -> b) -> Maybe a -> b
maybe b _ Nothing  = b
maybe _ f (Just a) = f a
```

Reuse in implementations

```
showResult  = maybe "ERROR" show
moveCommand = maybe Stay Move
safeAdd x   = maybe x (x+)
```

Refactoring data types

```
data Expr = Var Name
          | Add Expr Expr
          | Sub Expr Expr
          | Mul Expr Expr
```

```
vars :: Expr -> [Name]
vars (Var x)   = [x]
vars (Add l r) = vars l ++ vars r
vars (Sub l r) = vars l ++ vars r
vars (Mul l r) = vars l ++ vars r

eval :: Env -> Expr -> Int
eval m (Var x)   = get x m
eval m (Add l r) = eval m l + eval m r
eval m (Sub l r) = eval m l - eval m r
eval m (Mul l r) = eval m l * eval m r
```

Refactoring data types

Factor out shared structure

```
data Expr = Var Name
          | BinOp Op Expr Expr

data Op = Add | Sub | Mul
```

```
vars :: Expr -> [Name]
vars (Var x)       = [x]
vars (BinOp _ l r) = vars l ++ vars r

eval :: Env -> Expr -> Int
eval m (Var x) = get x m
eval m (BinOp o l r) = op o (eval m l) (eval m r)
  where
    op Add = (+)
    op Sub = (-)
    op Mul = (*)
```

Outline

Type inference

How to perform type inference (bottom-up strategy)

For each literal, data constructor, and named function: write down the type

Repeat until you know the type of the whole expression:

1. find an application $e_1\ e_2$ where you know $e_1 \texttt{::} T_1$ and $e_2 \texttt{::} T_2$
2. T_1 should be a function type $T_1 = T_{arg}$ **->** T_{res}
3. check that the argument type is what the function expects: $T_{arg} \stackrel{?}{=} T_2 \rightsquigarrow \sigma$
   - this step is called **type unification**
   - σ is an assignment of the type variables to make the two sides equal
4. write down $e_1\ e_2$ **::** σT_{res} ($\sigma T_{res} = T_{res}$ with type variables substituted)

If any of these steps fails, it is a **type error**!

Type unification (1/2)

Find a **type variable assignment** (σ) that makes the two sides **equal**

Unification by example

T_1	$\stackrel{?}{=}$	T_2	$\rightsquigarrow$	σ
`a`	$\stackrel{?}{=}$	`Int`	$\rightsquigarrow$	$\{$`a` $=$ `Int`$\}$
`Bool`	$\stackrel{?}{=}$	`a`	$\rightsquigarrow$	$\{$`a` $=$ `Bool`$\}$
`a`	$\stackrel{?}{=}$	`b`	$\rightsquigarrow$	$\{$`a` $=$ `b`$\}$
`Int`	$\stackrel{?}{=}$	`Bool`	$\rightsquigarrow$	Fail!
`a`	$\stackrel{?}{=}$	`Int -> Bool`	$\rightsquigarrow$	$\{$`a` $=$ `Int -> Bool`$\}$
`a -> Bool`	$\stackrel{?}{=}$	`Int -> Bool`	$\rightsquigarrow$	$\{$`a` $=$ `Int`$\}$

Type unification (2/2)

Find a **type variable assignment** (σ) that makes the two sides **equal**

Unification by example

T_1	$\stackrel{?}{=}$	T_2	$\rightsquigarrow$	σ
`a -> b`	$\stackrel{?}{=}$	`Int -> Bool`	$\rightsquigarrow$	$\{\texttt{a} = \texttt{Int}, \texttt{b} = \texttt{Bool}\}$
`Int -> a`	$\stackrel{?}{=}$	`b -> Bool`	$\rightsquigarrow$	$\{\texttt{a} = \texttt{Bool}, \texttt{b} = \texttt{Int}\}$
`a -> b`	$\stackrel{?}{=}$	`Int`	$\rightsquigarrow$	Fail!
`a -> b`	$\stackrel{?}{=}$	`Int -> Bool -> Char`	$\rightsquigarrow$	$\{\texttt{a} = \texttt{Int}, \texttt{b} = \texttt{Bool -> Char}\}$
`a -> b`	$\stackrel{?}{=}$	`(Int -> Bool) -> Char`	$\rightsquigarrow$	$\{\texttt{a} = \texttt{Int -> Bool}, \texttt{b} = \texttt{Char}\}$
`(a -> b) -> c`	$\stackrel{?}{=}$	`Int -> Bool -> Char`	$\rightsquigarrow$	Fail!

Exercises

Given

```
data Maybe a = Nothing | Just a
gt   :: Int -> Int -> Bool                    not  :: Bool -> Bool
map  :: (a -> b) -> [a] -> [b]                 even :: Int -> Bool
(.)  :: (b -> c) -> (a -> b) -> a -> c
```

1. `Just`
2. `not even 3`
3. `not (even 3)`
4. `not . even`
5. `even . not`
6. `map (Just . even)`