



1

Display Lists




Oregon State University

Mike Bailey
mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



Oregon State University
Computer Graphics

DisplayLists.pptx mb - August 22, 2022

2


Drawing a Sphere – Notice a lot of time-consuming Trig Function Calls!

```


void
OsuSphere( float radius, int slices, int stacks )
{
    struct point top, bot; // top, bottom points
    struct point *p;
    NumLngs = slices;
    NumLats = stacks;

    Pts = new struct point[ NumLngs * NumLats ];
    for( int ilat = 0; ilat < NumLats; ilat++ )
    {
        float lat = M_PI/2 + M_PI * (float)ilat / (float)(NumLats-1);
        float x = cos( lat );
        float y = sin( lat );
        for( int ilng = 0; ilng < NumLngs; ilng++ )
        {
            float lng = -M_PI + 2 * M_PI * (float)ilng / (float)(NumLngs-1);
            float z = x * cos( lng );
            float z = x * sin( lng );
            p = PtsPointer( ilat, ilng );
            p->x = radius * x;
            p->y = radius * y;
            p->z = radius * z;
            p->rx = x;
            p->ny = y;
            p->nz = z;
            p->s = ( lng + M_PI ) / ( 2 * M_PI );
            p->t = ( lat + M_PI/2 ) / M_PI;
        }
    }
}

```



Even worse, the trig calls are inside single or double-nested for-loops!



Oregon State University
Computer Graphics

mb - August 22, 2022

3

```

top.x = 0;   top.y = radius;  top.z = 0;
top.nx = 0;  top.ny = 1;     top.nz = 0;
top.s = 0;   top.t = 1;
bot.x = 0;   bot.y = -radius; bot.z = 0;
bot.nx = 0;  bot.ny = -1;    bot.nz = 0;
bot.s = 0;   bot.t = 0;


```

```

glBegin( GL_QUADS );
for( int ilng = 0; ilng < NumLngs-1; ilng++ )
{
    p = PtsPointer( NumLats-1, ilng );
    DrawPoint( p );
    p = PtsPointer( NumLats-2, ilng );
    DrawPoint( p );
    p = PtsPointer( NumLats-1, ilng+1 );
    DrawPoint( p );
    p = PtsPointer( NumLats-1, ilng+1 );
    DrawPoint( p );
}
glEnd();

glBegin( GL_QUADS );
for( int ilng = 0; ilng < NumLngs-1; ilng++ )
{
    p = PtsPointer( 0, ilng );
    DrawPoint( p );
    p = PtsPointer( 0, ilng+1 );
    DrawPoint( p );
    p = PtsPointer( 1, ilng+1 );
    DrawPoint( p );
    p = PtsPointer( 1, ilng );
    DrawPoint( p );
}
glEnd();

```



Oregon State University
Computer Graphics


mb - August 22, 2022

4

```

glBegin( GL_QUADS );
for( int ilat = 2; ilat < NumLats-1; ilat++ )
{
    for( int ilng = 0; ilng < NumLngs-1; ilng++ )
    {
        p = PtsPointer( ilat-1, ilng );
        DrawPoint( p );
        p = PtsPointer( ilat-1, ilng+1 );
        DrawPoint( p );
        p = PtsPointer( ilat, ilng+1 );
        DrawPoint( p );
        p = PtsPointer( ilat, ilng );
        DrawPoint( p );
    }
}
glEnd();

```



Oregon State University
Computer Graphics


mb - August 22, 2022

You don't want to execute all that code every time you want to redraw the scene, so draw it once, store the numbers in GPU memory, and call them back up later

5


Without a Display List:

The CPU re-computes and transmits the sphere coordinates every time it they need to be drawn



With a Display List:

The CPU computes and transmits the sphere coordinates *once* and then they are grabbed from GPU memory every time they need to be drawn

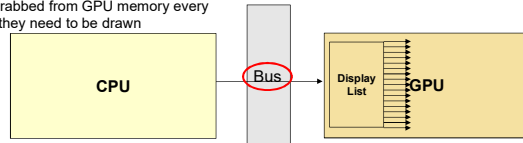

You don't want to execute all that code every time you want to redraw the scene, so draw it once, store the numbers in GPU memory, and call them back up later

6

The solution is to incur the sphere-creation overhead *once*, and whenever the sphere needs to be re-drawn, just draw the saved numbers, not the equations. This is a **Display List**.

- How many unique, unused, consecutive DL identifiers to give back to you
- The ID of the first DL in the unique, unused list

Creating the Display List in `InitLists()`:

```
// a global GLuint variable:
SphereList = glGenLists( 1 );
glNewList( SphereList, GL_COMPILE );
OsuSphere( 5., 30., 30. );
glEndList( );
```

- Open up a display list in (GPU) memory
- The coordinates, etc. end up in memory instead of being sent to the display
- All done with storing the numbers in the DL

Calling up the Display List in `Display()`:

```
glCallList( SphereList );
```

- Pull all the coordinates, etc. from memory, just as if the code to generate them had been executed here

A Common Display List Misconception

7

Let's say that we are creating a rectangle in a Display List, like this:

```
float L, W; // length and width global variables
int RectList; // rectangle display list
```

```
L = 10.; W = 5.;
glNewList( RectList, GL_COMPILE );
<< draw a rectangle using L and W >>
glEndList( );
```

Then, when we go to use the DL, we do this:

```
L = 4.; W = 2.;
glCallList( RectList );
```

What size rectangle will it draw? 10x5? 4x2?

It will draw a 10x5 rectangle. Display Lists bake in the **numbers**. They retain no knowledge of what **variables** were used to create those numbers!