



1


The OpenGL Mathematics (GLM) Library



Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/).



GLM.pptx
mb - July 29, 2021

2

What is GLM?

GLM is a set of C++ classes and functions to fill in the programming gaps in writing the basic vector and matrix mathematics for OpenGL applications.

GLM isn't really a *library* – it is all specified in *.hpp header files so that it gets compiled in with your source code.


You can find it at:
<http://glm.g-truc.net/0.9.8.5/>

You invoke GLM like this:

```
#define GLM_FORCE_RADIANS
#include <glm/glm.hpp>
#include <glm/gtc/matrix_transform.hpp>
```

Or, you can #include only the specific GLM .hpp files you need.

If GLM is not installed in a system place, put it somewhere you can get access to. Later on, these notes will show you how to use it from there.



mb - July 29, 2021

3

Why are we even talking about this?


The OpenGL overlords have “deprecated” some of the OpenGL functions we have been using to perform transformations. In the desktop world, it means that the use of such functions is **discouraged**. In Vulkan and in the mobile world of OpenGL-ES, it means those functions are **gone**. You might as well become familiar with how to live without them. So, instead of saying:

```
gluLookAt( 0., 0., 3., 0., 0., 0., 0., 1., 0. );
glRotatef( (GLfloat)Yrot, 0., 1., 0. );
glRotatef( (GLfloat)Xrot, 1., 0., 0. );
glScalef( (GLfloat)Scale, (GLfloat)Scale, (GLfloat)Scale );
```

for OpenGL, you would now say:

```
glm::mat4 modelview;
glm::vec3 eye(0.,0.,3.);
glm::vec3 look(0.,0.,0.);
glm::vec3 up(0.,1.,0.);
modelview = glm::lookAt( eye, look, up );
modelview = glm::rotate( modelview, D2R*Yrot, glm::vec3(0.,1.,0.) );
modelview = glm::rotate( modelview, D2R*Xrot, glm::vec3(1.,0.,0.) );
modelview = glm::scale( modelview, glm::vec3(Scale,Scale,Scale) );
glmMultMatrixf( glm::value_ptr( modelview ) );
```

Exactly the same concept, but a different expression of it. Read on for details ...



mb - July 29, 2021

4


The Most Useful GLM Variables, Operations, and Functions

```
// constructor:
glm::mat4( 1. );           // identity matrix
glm::vec4( );
glm::vec3( );
```

GLM recommends that you use the “glm::” syntax and not use “using namespace” syntax because they have not made any effort to create unique function names

```
// multiplications – the * operator has been overloaded:
glm::mat4 * glm::mat4
glm::mat4 * glm::vec4
glm::mat4 * glm::vec4( glm::vec3, 1. ) // promote vec3 to a vec4 via a constructor
```

```
// emulating OpenGL transformations with concatenation:
glm::mat4 glm::rotate( glm::mat4 const & m, float angle, glm::vec3 const & axis );
glm::mat4 glm::scale( glm::mat4 const & m, glm::vec3 const & factors );
glm::mat4 glm::translate( glm::mat4 const & m, glm::vec3 const & translation );
```



mb - July 29, 2021

The Most Useful GLM Variables, Operations, and Functions

5

// viewing volume (assign, not concatenate):

```
glm::mat4 glm::ortho( float left, float right, float bottom, float top, float near, float far );
glm::mat4 glm::ortho( float left, float right, float bottom, float top );
```

```
glm::mat4 glm::frustum( float left, float right, float bottom, float top, float near, float far );
glm::mat4 glm::perspective( float fovy, float aspect, float near, float far );
```

// viewing (assign, not concatenate):

```
glm::mat4 glm::lookAt( glm::vec3 const & eye, glm::vec3 const & look, glm::vec3 const & up );
```

// loading matrices into opengl:

```
glLoadMatrix( glm::value_ptr( glm::mat4 ) );
```

```
glUniformMatrix4fv( Location, 1, GL_FALSE, glm::value_ptr( glm::mat4 ) );
```




mb - July 29, 2021

Installing GLM into your own space

6


I like to just put the whole thing under my Visual Studio project folder so I can zip up a complete project and give it to someone else.

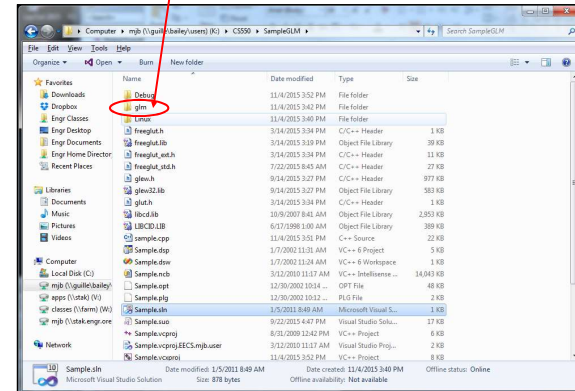

mb - July 29, 2021

Here's what that GLM folder looks like

7

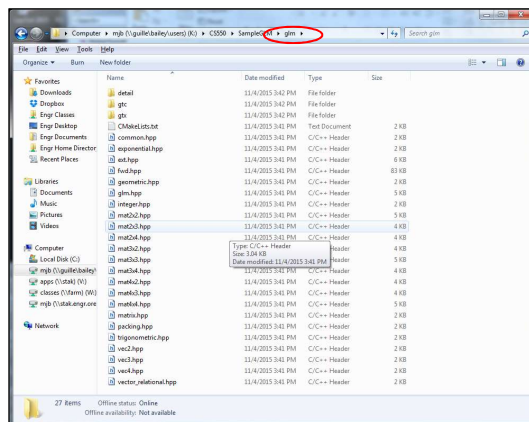

mb - July 29, 2021

Telling Linux about where the GLM folder is

8

```
g++ ... -I...
```

"minus-capital-eye-period" means "also look for the <> includes in this folder"


Instead of the period, you can list a full or relative pathname.



mb - July 29, 2021

Telling Visual Studio about where the GLM folder is


9

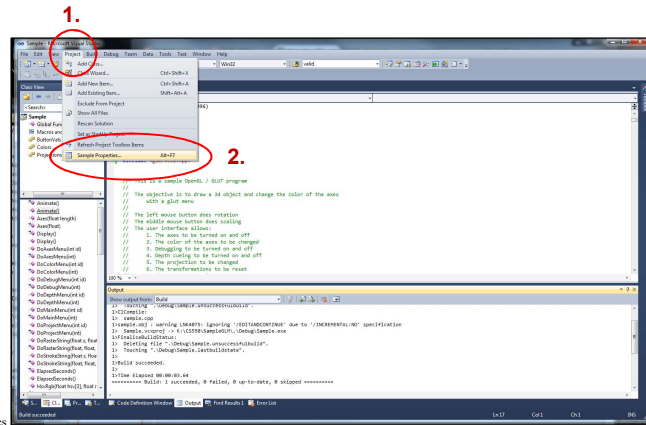

Telling Visual Studio about where the GLM folder is

10

A *period*, indicating that the **project folder** should also be searched when a **#include <xxx>** is encountered. If you put it somewhere else, enter that full or relative path instead.

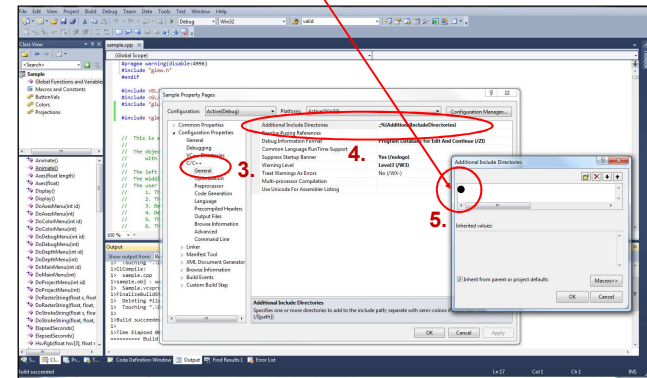

Using Transformations, OpenGL-style, like in the sample.cpp Program

11

```

glmMatrixMode( GL_PROJECTION );
glLoadIdentity( );
if( WhichProjection == ORTHO )
    glOrtho( -3., 3., -3., 3., 0.1, 1000. );
else
    gluPerspective( 90., 1., 0.1, 1000. );

// place the objects into the scene:
glmMatrixMode( GL_MODELVIEW );
glLoadIdentity( );

// set the eye position, look-at position, and up-vector:
gluLookAt( 0., 0., 3., 0., 0., 0., 0., 1., 0. );

// rotate the scene:
glRotatef( (GLfloat)Yrot, 0., 1., 0. );
glRotatef( (GLfloat)Xrot, 1., 0., 0. );

// uniformly scale the scene:
if( Scale < MINSCALE )
    Scale = MINSCALE;
glScalef( (GLfloat)Scale, (GLfloat)Scale, (GLfloat)Scale );
    
```

Using Transformations, GLM-style, I

12

```

#include <glm/vec3.hpp>
#include <glm/mat4x4.hpp>
#include <glm/gtc/matrix_transform.hpp>
#include <glm/gtc/type_ptr.hpp>

...

// convert degrees to radians:
const float D2R = M_PI/180.f;           // 0.01745...

...

glmMatrixMode( GL_PROJECTION );
glLoadIdentity( );
glm::mat4 projection;

if( WhichProjection == ORTHO )
    projection = glm::ortho( -3., 3., -3., 3., 0.1, 1000. );
else
    projection = glm::perspective( D2R*90., 1., 0.1, 1000. );

// apply the projection matrix:
glmMultMatrixf( glm::value_ptr( projection ) );
    
```

Using Transformations, GLM-style, II

13

```
// place the objects into the scene:
glMatrixMode( GL_MODELVIEW );
glLoadIdentity( );

// set the eye position, look-at position, and up-vector:
glm::vec3 eye(0.,0.,3.);
glm::vec3 look(0.,0.,0.);
glm::vec3 up(0.,1.,0.);
glm::mat4 modelview = glm::lookAt( eye, look, up );

// rotate the scene (warning -- unlike OpenGL's glRotatef,
// GLM's rotate method takes angles in *radians*):
modelview = glm::rotate( modelview, D2R*Yrot, glm::vec3(0.,1.,0.) );
modelview = glm::rotate( modelview, D2R*Xrot, glm::vec3(1.,0.,0.) );

// uniformly scale the scene:
if( Scale < MINSCALE )
    Scale = MINSCALE;
modelview = glm::scale( modelview, glm::vec3(Scale,Scale,Scale) );

// apply the modelview matrix:
glMultMatrixf( glm::value_ptr( modelview ) );
```



mp - July 29, 2021

Passing GLM Matrices into a Vertex Shader

14

```
In the shader:
uniform mat4 projectionMatrix;
uniform mat4 viewMatrix;
uniform mat4 modelMatrix;

mat4 PVM = projectionMatrix * viewMatrix * modelMatrix;
gl_Position = PVM * gl_Vertex;

In the C/C++ program:
glm::mat4 projection = glm::perspective( D2R*90., 1., 0.1, 1000. );

glm::vec3 eye(0.,0.,3.);
glm::vec3 look(0.,0.,0.);
glm::vec3 up(0.,1.,0.);
glm::mat4 view = glm::lookAt( eye, look, up );

glm::mat4 model( 1. ); // identity
model = glm::rotate( model, D2R*Yrot, glm::vec3(0.,1.,0.) );
model = glm::rotate( model, D2R*Xrot, glm::vec3(1.,0.,0.) );

Pattern->Use( );
Pattern->SetUniformVariable( "projectionMatrix", projection );
Pattern->SetUniformVariable( "viewMatrix", view );
Pattern->SetUniformVariable( "modelMatrix", model );
```



mp - July 29, 2021

GLM for Vulkan

15

```
glm::mat4 projection = glm::perspective( D2R*90., 1., 0.1, 1000. );
projection[1][1] *= -1.; // Vulkan's projected Y is inverted from OpenGL's

glm::vec3 eye(0.,0.,3.);
glm::vec3 look(0.,0.,0.);
glm::vec3 up(0.,1.,0.);
glm::mat4 view = glm::lookAt( eye, look, up );

glm::mat4 model( 1. ); // identity
model = glm::rotate( model, D2R*Yrot, glm::vec3(0.,1.,0.) );
model = glm::rotate( model, D2R*Xrot, glm::vec3(1.,0.,0.) );
```



mp - July 29, 2021