

Placing the Eye Position on an Orbiting Body



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



OrbitingEyePosition.pptx

mjb - November 2, 2023

Program Setup

```
#include <stdio.h>
#include <string>
#define _USE_MATH_DEFINES
#include <cmath>

#define GLM_FORCE_RADIANS
#include "glm/vec2.hpp"
#include "glm/vec3.hpp"
#include "glm/mat4x4.hpp"
#include "glm/gtc/matrix_transform.hpp"
#include "glm/gtc/matrix_inverse.hpp"
#include "glm/gtc/type_ptr.hpp"

#include <GL/gl.h>
#include <GL/glu.h>

const float      EYEDISTFACTOR = 0.75f;
const float      ZFAR = 1000000.0f;
const float      FOVDEG = 90.0f;

enum views
{
    OUTSIDEVIEW, EARTHVIEW, MOONVIEW, CORVALLISVIEW
};
enum views      NowView;

float           Time;
```

These are the near and far clipping plane distances in front of the eye. The ZNEAR is typically pretty small, but the ZFAR depends on the scene.

For a lot of our projects, a ZFAR of 1000. worked well. But, for something bigger, like the solar system, you will need a ZFAR that will contain the whole depth of the scene.

The look-at position is on the planet. The eye-position is behind that on a line tangent to the planet. The distance from the look-at position to the eye-position will depend on this factor times the radius of the specific planet. 0.75 - 1.25 worked well for me.

Perspective field-of-view angle (degrees)

The different eye views you can use

Which eye view is the current one

Make Time go from 0. to however many seconds you want in your total animation, *not 0. to 1.*




mjb - November 2, 2023

Possibly Adjusting the Viewing Volume

3

Remember these lines from our sample code?


```
if( WhichProjection == ORTHO )
    glOrtho( -3., 3., -3., 3., znear, zfar );
else
    gluPerspective( FOVDEG, 1., znear, zfar );
```



Be careful because objects can disappear due to clipping:

- Items in your scene closer to you than *znear* in front of your eye will be *clipped away*.
- Items in your scene farther from you than *zfar* in front of your eye will be *clipped away*.

This makes them hard to debug. 😊

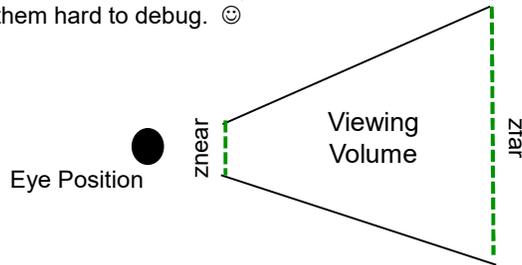


When we started doing computer graphics, the objects were fairly small, so “**0.1f, 1000.f**” worked. However, now we are doing solar systems, which could, potentially, have much larger coordinates. Our special eye-position math helps set *znear*. But, depending on how you construct your scene, you might have to adjust *zfar*.

mjb – November 2, 2023

Physical Parameter Setup

4

At the top of the program:

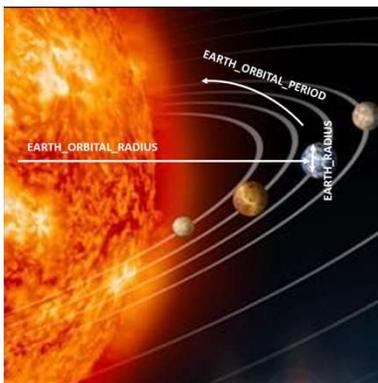

<https://www.livescience.com/our-solar-system.html>

```
const float SUN_RADIUS_MILES = 432690.f;
const float SUN_SPIN_TIME_DAYS_EQUATOR = 25.f;
const float SUN_SPIN_TIME_HOURS_EQUATOR = SUN_SPIN_TIME_DAYS_EQUATOR * 24.f;
const float SUN_SPIN_TIME_SECONDS_EQUATOR = SUN_SPIN_TIME_HOURS_EQUATOR * 60.f * 60.f;
const float SUN_SPIN_TIME_DAYS_POLES = 35.f;
const float SUN_SPIN_TIME_HOURS_POLES = SUN_SPIN_TIME_DAYS_POLES * 24.f;
const float SUN_SPIN_TIME_SECONDS_POLES = SUN_SPIN_TIME_HOURS_POLES * 60.f * 60.f;
```

```
const float EARTH_RADIUS_MILES = 3964.19f;
const float EARTH_TILT_ANGLE_DEG = 23.44f;
const float EARTH_ORBITAL_RADIUS_MILES = 92900000.f;
const float EARTH_ORBIT_TIME_DAYS = 365.3f;
const float EARTH_ORBIT_TIME_HOURS = EARTH_ORBIT_TIME_DAYS * 24.f;
const float EARTH_ORBIT_TIME_SECONDS = EARTH_ORBIT_TIME_HOURS * 60.f * 60.f;
const float EARTH_SPIN_TIME_DAYS = 0.9971f;
const float EARTH_SPIN_TIME_HOURS = EARTH_SPIN_TIME_DAYS * 24.f;
const float EARTH_SPIN_TIME_SECONDS = EARTH_SPIN_TIME_HOURS * 60.f * 60.f;
```

```
const float MOON_RADIUS_MILES = 1079.6f;
const float MOON_ORBITAL_RADIUS_MILES = 238900.f;
const float MOON_ORBIT_TIME_DAYS = 27.3f;
const float MOON_ORBIT_TIME_HOURS = MOON_ORBIT_TIME_DAYS * 24.f;
const float MOON_ORBIT_TIME_SECONDS = MOON_ORBIT_TIME_HOURS * 60.f * 60.f;
const float MOON_SPIN_TIME_DAYS = MOON_ORBIT_TIME_DAYS;
const float MOON_SPIN_TIME_HOURS = MOON_SPIN_TIME_DAYS * 24.f;
const float MOON_SPIN_TIME_SECONDS = MOON_SPIN_TIME_HOURS * 60.f * 60.f;
```

Warning: these are the *actual* numbers for our solar system. You would need to change them to your exaggerated numbers!

Also, you might need to change the *znear* and *zfar* values in your call to `gluPerspective()` to work with whatever scale you choose.

mjb – November 2, 2023

Here's How I Tried Scaling Things

5

```
// time scale wrt days (bigger creates slower):
const float TS = 1.08f / ( 24.f * 60.f * 60.f );
// this creates a 1 second on the screen = 1 day in the real solar system

// planet radius scale:
const float PRS = 0.1f / 3964.f;

// sun radius scale:
const float SRS = PRS/40.f;

// earth orbital radius scale:
const float EORS = 1.f / 93000000.f;

// moon orbital radius scale:
const float MORS = 150.f * EORS;

const float SUN_RADIUS_MILES = SRS*432690.f;
const float SUN_SPIN_TIME_DAYS_EQUATOR = TS*25.f;
const float SUN_SPIN_TIME_HOURS_EQUATOR = SUN_SPIN_TIME_DAYS_EQUATOR * 24.f;
const float SUN_SPIN_TIME_SECONDS_EQUATOR = SUN_SPIN_TIME_HOURS_EQUATOR * 60.f * 60.f;
const float SUN_SPIN_TIME_DAYS_POLES = TS*35.f;
const float SUN_SPIN_TIME_HOURS_POLES = SUN_SPIN_TIME_DAYS_POLES * 24.f;
const float SUN_SPIN_TIME_SECONDS_POLES = SUN_SPIN_TIME_HOURS_POLES * 60.f * 60.f;

const float EARTH_RADIUS_MILES = PRS*3964.19f;
const float EARTH_TILT_ANGLE_DEG = 23.44f;
const float EARTH_ORBITAL_RADIUS_MILES = EORS*92900000.f;
const float EARTH_ORBIT_TIME_DAYS = TS*365.3f;
const float EARTH_ORBIT_TIME_HOURS = EARTH_ORBIT_TIME_DAYS * 24.f;
const float EARTH_ORBIT_TIME_SECONDS = EARTH_ORBIT_TIME_HOURS * 60.f * 60.f;
const float EARTH_SPIN_TIME_DAYS = TS*0.9971f;
const float EARTH_SPIN_TIME_HOURS = EARTH_SPIN_TIME_DAYS * 24.f;
const float EARTH_SPIN_TIME_SECONDS = EARTH_SPIN_TIME_HOURS * 60.f * 60.f;

const float MOON_RADIUS_MILES = PRS*1079.6f;
const float MOON_ORBITAL_RADIUS_MILES = MORS*238900.f;
const float MOON_ORBITAL_INCLINATION_DEG = 5.14f;
const float MOON_ORBIT_TIME_DAYS = TS*27.3f;
const float MOON_ORBIT_TIME_HOURS = MOON_ORBIT_TIME_DAYS * 24.f;
const float MOON_ORBIT_TIME_SECONDS = MOON_ORBIT_TIME_HOURS * 60.f * 60.f;
const float MOON_SPIN_TIME_DAYS = MOON_ORBIT_TIME_DAYS;
const float MOON_SPIN_TIME_HOURS = MOON_SPIN_TIME_DAYS * 24.f;
const float MOON_SPIN_TIME_SECONDS = MOON_SPIN_TIME_HOURS * 60.f * 60.f;
```



mjb - November 2, 2023

Timing Setup

6

At the top of the program:

```
const int MAXIMUM_TIME_SECONDS = 10*60; // I decided to use 10 minutes
const int MAXIMUM_TIME_MILLISECONDS = 1000* MAXIMUM_TIME_SECONDS;
const float ONE_FULL_TURN = 2.f * F_PI; // this is 2π instead of 360° because glm uses radians
```

In the Animate() function:

```
int ms = glutGet( GLUT_ELAPSED_TIME ); // milliseconds
ms %= MAXIMUM_TIME_MILLISECONDS ; // [ 0, MAXIMUM_TIME_MILLISECONDS-1 ]
Time = (float)ms / 1000.f; // seconds
```

// note that Time goes from 0. to however many seconds you asked for, not 0. - 1. !

```
// force a call to Display( ):
glutSetWindow(MainWindow);
glutPostRedisplay();
```

In the InitGraphics() function:

```
...
glutIdleFunc( Animate );
...
```



mjb - November 2, 2023

Display List Setup

7

```

SphereDL = glGenLists( 1 );
glNewList( SphereDL, GL_COMPILE );
    OsuSphere( 1.f, 512, 512 );
glEndList();

SunDL = glGenLists( 1 );
glNewList( SunDL, GL_COMPILE );
    glBindTexture(GL_TEXTURE_2D, SunTexture );
    glPushMatrix();
        glScalef(SUN_RADIUS_MILES, SUN_RADIUS_MILES, SUN_RADIUS_MILES);
        glCallList(SphereDL);
    glPopMatrix();
glEndList();

EarthDL = glGenLists( 1 );
glNewList( EarthDL, GL_COMPILE );
    glBindTexture(GL_TEXTURE_2D, EarthTexture );
    glPushMatrix();
        glScalef( EARTH_RADIUS_MILES, EARTH_RADIUS_MILES, EARTH_RADIUS_MILES);
        glCallList(SphereDL);
    glPopMatrix();
glEndList();

MoonDL = glGenLists( 1 );
glNewList( MoonDL, GL_COMPILE );
    glBindTexture(GL_TEXTURE_2D, MoonTexture );
    glPushMatrix();
        glScalef(MOON_RADIUS_MILES, MOON_RADIUS_MILES, MOON_RADIUS_MILES);
        glCallList(SphereDL);
    glPopMatrix();
glEndList();

```

A display list can call a previously-created display list

Earth Transformations

8



Steps to transform the Earth-eye-viewing system into Solar System Coordinates:
Using `OsuSphere()` draw the Earth into a display list at $(0.,0.,0.)$, i.e., the Sun's center

1. Spin the Earth by *EarthSpinAngle* about its Y axis
 2. Tilt the Earth by 23.5° about its X axis
 3. Translate the Earth to where it belongs in its orbit
- } [$M_{e/s}$]

```

glm::mat4
MakeEarthMatrix( )
{
    const float earthSpinAngle = ONE_FULL_TURN * Time * TimeScale / EARTH_SPIN_TIME_SECONDS;
    const float earthOrbitAngle = ONE_FULL_TURN * Time * TimeScale / EARTH_ORBIT_TIME_SECONDS;
    const glm::mat4 identity = glm::mat4( 1. );
    const glm::vec3 yaxis = glm::vec3( 0., 1., 0. );
    const glm::vec3 zaxis = glm::vec3( 0., 0., 1. );
    // note: because the earth is tilted, we cannot play the translate+rotate trick -- the tilt must always be in the same direction
    // instead we must translate the earth to where it really belongs:
    glm::vec3 eorbitPosition = glm::vec3( EARTH_ORBITAL_RADIUS_MILES * cosf(earthOrbitAngle), 0., -EARTH_ORBITAL_RADIUS_MILES * sinf(earthOrbitAngle) );

    /* 3. */ glm::mat4 etransx= glm::translate( identity, eorbitPosition);
    /* 2. */ glm::mat4 etilt = glm::rotate( identity, glm::radians(EARTH_TILT_ANGLE_DEG), zaxis );
    /* 1. */ glm::mat4 erspiny = glm::rotate( identity, earthSpinAngle - earthOrbitAngle, yaxis );// the orbit angle also does the spin

    return etransx * etilt * erspiny;// 3 * 2 * 1 [  $M_{e/s}$  ]
}

```

Moon Transformations

9



Steps to transform the Moon-eye-viewing system:

Using `OsuSphere()` draw the Moon into a display list at $(0.,0.,0.)$, i.e., the Sun's center

1. Spin the Moon by *MoonSpinAngle* about its Y axis
 2. Translate the Moon by *MOON_ORBITAL_RADIUS_MILES* in its X direction
 3. Revolve the Moon by *MoonOrbitAngle* about the Earth's Y axis
 4. Incline the Moon by *MOON_ORBITAL_INCLINATION_DEG* about the Z axis
 5. Translate the Earth by *EARTH_ORBITAL_RADIUS_MILES* in its X direction
 6. Revolve the Earth by *EarthOrbitAngle* about the Sun's Y axis
- $\left. \begin{array}{l} 1. \\ 2. \\ 3. \\ 4. \end{array} \right\} [M_{m/e}]$
 $\left. \begin{array}{l} 5. \\ 6. \end{array} \right\} [M_{e/s}]$
- `glCallList(MoonList);`

Note that *EarthSpinAngle* and *EarthTiltAngle* have no effect on the Moon's matrix

```
glm::mat4
MakeMoonMatrix( )
{
    float moonSpinAngle = ONE_FULL_TURN * Time * TimeScale / MOON_SPIN_TIME_SECONDS;
    float moonOrbitAngle = ONE_FULL_TURN * Time * TimeScale / MOON_ORBIT_TIME_SECONDS;
    float earthOrbitAngle = ONE_FULL_TURN * Time * TimeScale / EARTH_ORBIT_TIME_SECONDS;
    glm::mat4 identity = glm::mat4( 1. );
    glm::vec3 yaxis = glm::vec3( 0., 1., 0. );
    glm::vec3 zaxis = glm::vec3( 0., 0., 1. );

    /* 6. */ glm::mat4 erorbity = glm::rotate( identity, earthOrbitAngle, yaxis );
    /* 5. */ glm::mat4 etransx = glm::translate( identity, glm::vec3( EARTH_ORBITAL_RADIUS_MILES, 0., 0. ) );
    /* 4. */ glm::mat4 mminclinez = glm::rotate( identity, glm::radians(MOON_ORBITAL_INCLINATION_DEG), zaxis );
    /* 3. */ glm::mat4 mrorbity = glm::rotate( identity, moonOrbitAngle, yaxis );
    /* 2. */ glm::mat4 mtransx = glm::translate( identity, glm::vec3( MOON_ORBITAL_RADIUS_MILES, 0., 0. ) );
    /* 1. */ glm::mat4 mrspinY = glm::rotate( identity, moonSpinAngle-moonOrbitAngle, yaxis ); // the orbit angle also does the spin

    return erorbity * etransx * mminclinez * mrorbity * mtransx * mrspinY; // 6 * 5 * 4 * 3 * 2 * 1 } [M_{e/s}] * [M_{m/e}]
```

mjb - November 2, 2023

Note: You Can Use these Matrices to Draw the Objects in the Proper Locations instead of using `glRotatef()` and `glTranslatef()`

10

```
glm::mat4 e = MakeEarthMatrix( );
glm::mat4 m = MakeMoonMatrix( );

glEnable(GL_TEXTURE_2D);
If( DoingLighting )
{
    glEnable( GL_LIGHTING );
    glEnable( GL_LIGHT0 );
}


glPushMatrix( );
glBindTexture(GL_TEXTURE_2D, EarthTex );
glTexEnvf( GL_TEXTURE_ENV, GL_TEXTURE_ENV_MODE, GL_MODULATE );
glMultMatrixf( glm::value_ptr(e) );
glCallList( EarthList );
glPopMatrix( );

glPushMatrix();
glBindTexture( GL_TEXTURE_2D, MoonTex );
glTexEnvf( GL_TEXTURE_ENV, GL_TEXTURE_ENV_MODE, GL_MODULATE );
glMultMatrixf( glm::value_ptr(m) );
glCallList( MoonList );
glPopMatrix( );
```

mjb - November 2, 2023


Transformations In Action!

11

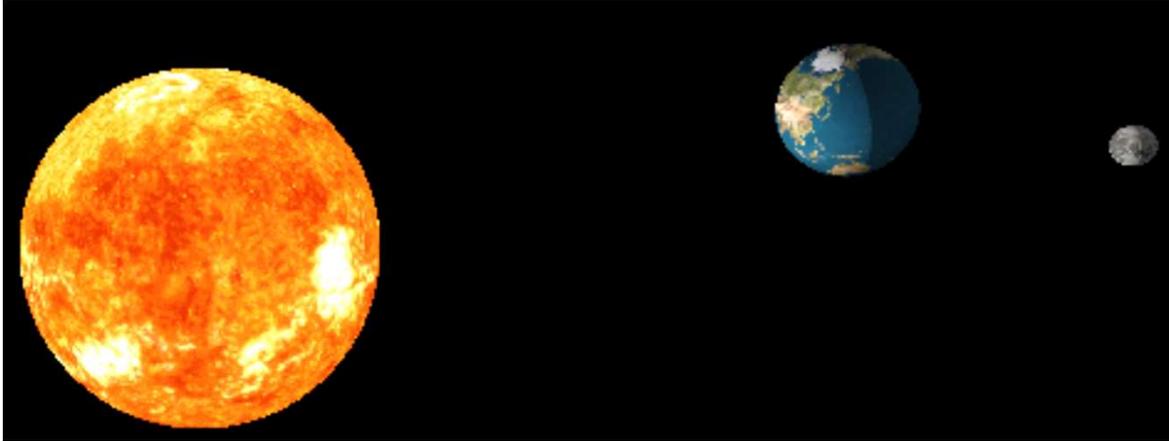

Earth Viewing

12

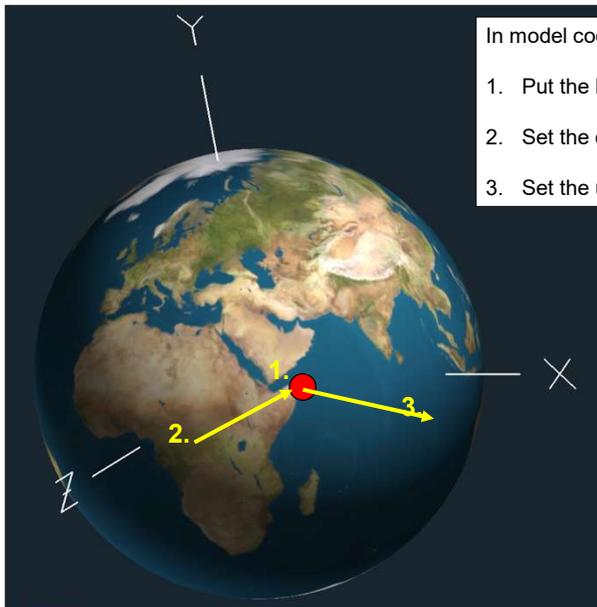

In model coordinates:

1. Put the **look-at-position** at an arbitrary latitude and longitude
2. Set the **eye-position** at an arbitrary latitude and longitude
3. Set the **up-vector** to be perpendicular to the surface at the look-at position

Now, all we have to do is transform those two locations and one vector into Solar System Coordinates (I hate to call them "World Coordinates" here...).

Converting Latitude-Longitude to XYZ

13

```

glm::vec3
LatLngToXYZ(float lat, float lng, float rad )
{
    lat = glm::radians(lat);
    lng = glm::radians(lng);
    glm::vec3 xyz;
    float xz = cosf(lat);


    xyz.x = -rad * xz * cosf(lng);
    xyz.y = rad * sinf(lat);
    xyz.z = rad * xz * sinf(lng);
    return xyz;
}

```

Convert a latitude and longitude (in *degrees*) and a planet radius to an (x,y,z). This assumes that (0,0,0) is at the center of the planet.

Moon Viewing

14

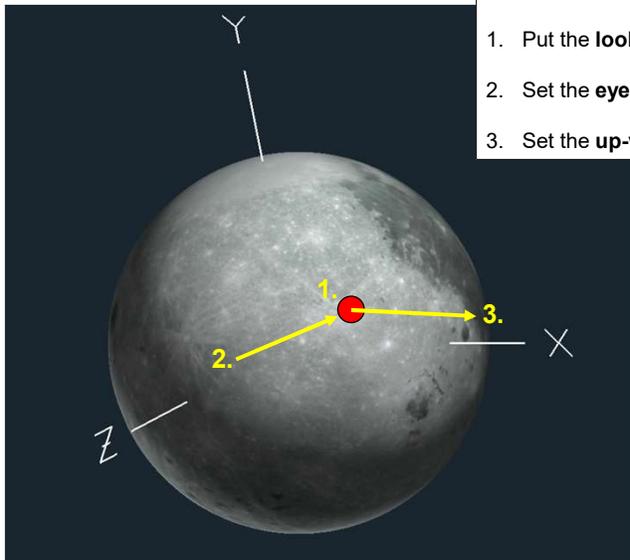

In model coordinates:

1. Put the **look-at-position** at an arbitrary latitude and longitude
2. Set the **eye-position** at an arbitrary latitude and longitude
3. Set the **up-vector** to be perpendicular to the surface at the look-at position

Now, all we have to do is transform those two locations and one vector into Solar System Coordinates (I hate to call them "World Coordinates" here...).

Converting Eye+Look Latitude-Longitude to Eye+Look XYZ: It would be nice if this was all there was to it. Hint: there's more!

15


```
void
SetViewingFromLatLng(float eyeLat, float eyeLng, float lookLat, float lookLng, float rad, glm::vec4 * eyep, glm::vec4 * lookp, glm::vec4 * upp, float *znearp )
{
    glm::vec3 center = glm::vec3( 0., 0., 0. ); // center of planet
    glm::vec3 eye = LatLngToXYZ(eyeLat, eyeLng, rad );
    glm::vec3 look = LatLngToXYZ(lookLat, lookLng, rad );
    glm::vec3 upVec = glm::normalize( look - center ); // perpendicular to the globe at the look position

    *eyep = glm::vec4( eye, 1. );
    *lookp = glm::vec4( look, 1. );
    *upp = glm::vec4( upVec, 0. );
    *znearp = 0.1f;
}
```

Convert a latitude and longitude eye position and look-at position (in *degrees*) and a planet radius to an eye position, look-at position, up-vector, and near clipping distance in XYZ coordinates.

Here's the Viewing Strategy

16

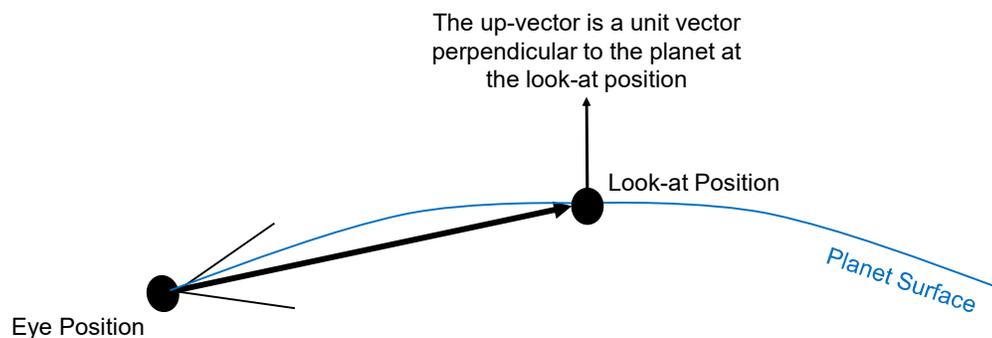


Strategy:

1. Pick a (latitude,longitude) for the eye position
2. Pick a (latitude,longitude) for the look-at position
3. Use the surface normal at the look-at position for the up-vector

But There is a Problem -- We Cannot Leave the Eye There!

17

With this eye and look combination, we will be looking up *through* the planet.

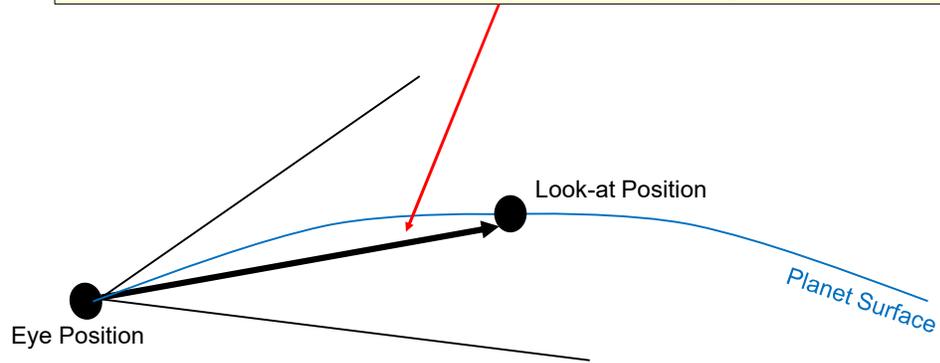

18


We are about to use some vector math!
 Vector math is a *big deal* in computer graphics. Your games use it all the time.
 You don't have to completely understand vector math to appreciate what we are about to use it for.

But, if you would like a review of vector math, go to:

<http://cs.oregonstate.edu/~mjb/cs491/Handouts/vectors.1pp.pdf>

Sidebar: Vectors have Direction and Magnitude


19

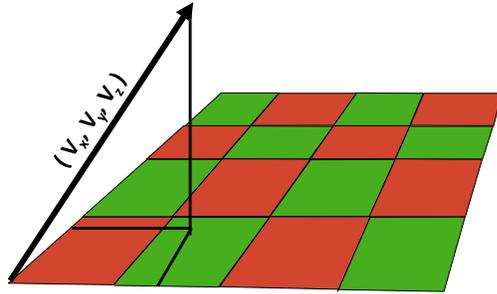

$$\text{Magnitude: } \|V\| = \sqrt{V_x^2 + V_y^2 + V_z^2}$$

Sidebar: Unit Vectors have a Magnitude = 1.0

20

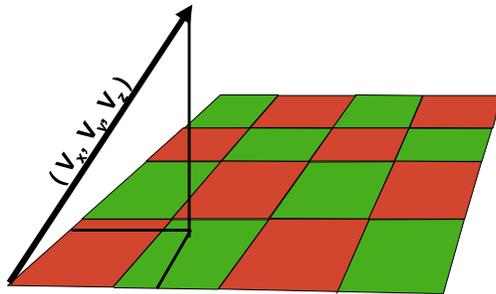


$$\|V\| = \sqrt{V_x^2 + V_y^2 + V_z^2}$$

$$\hat{V} = \frac{V}{\|V\|}$$

The circumflex (^) tells us this is a unit vector

21

Sidebar:
Using the Vector Dot Product to Determine How Much of Vector-A Lives in the Vector-B Direction



$$A \cdot B = \|A\| \|B\| \cos\theta$$

$$A \cdot \hat{B} = \|A\| \cos\theta$$

which is the length of the projection of A onto the B line


So, how much of A lives in the \hat{B} direction is that magnitude times the B unit vector:

$$(A \cdot \hat{B}) \hat{B}$$


mjb - November 2, 2023

22

The Viewing Strategy is to Make the Eye-to-Look Tangent to the Planet

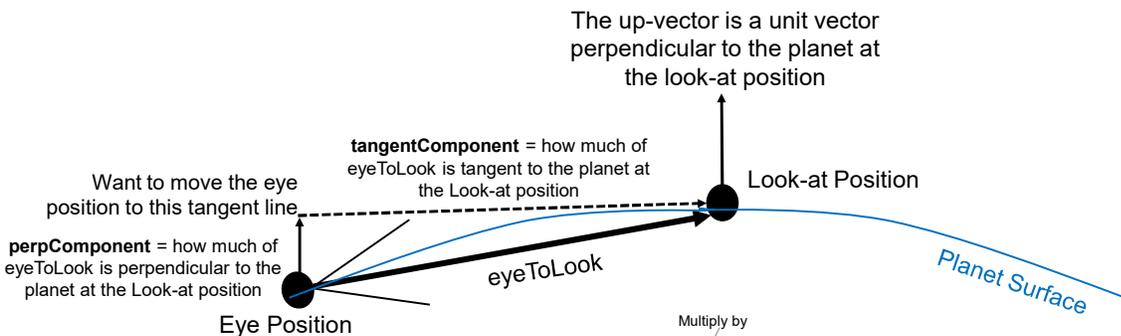

The up-vector is a unit vector perpendicular to the planet at the look-at position

Want to move the eye position to this tangent line

tangentComponent = how much of eyeToLook is tangent to the planet at the Look-at position

perpComponent = how much of eyeToLook is perpendicular to the planet at the Look-at position

Eye Position Look-at Position Planet Surface

Vector dot product Multiply by

$$\text{perpComponent} = (\text{eyeToLook} \cdot \hat{\text{upVec}}) * \hat{\text{upVec}}$$

$$\text{perpComponent} + \text{tangentComponent} = \text{eyeToLook}$$

↓

$$\text{tangentComponent} = \text{eyeToLook} - \text{perpComponent}$$

This line is of the form: $(A \cdot \hat{B}) \hat{B}$

_____ = a glm::vec3

^ = a unitized glm::vec3




mjb - November 2, 2023


But There is *Another* Problem – We Have to Set the Near Clipping Plane Carefully

23

If we put the near clipping plane here then all we can ever see is the top surface of the planet – this is good

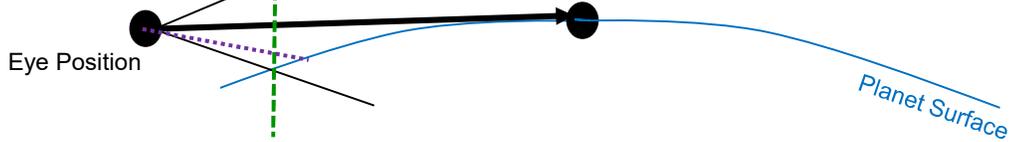

But if we put the near clipping plane out here, then we can see *under* the top surface of the planet – this is bad

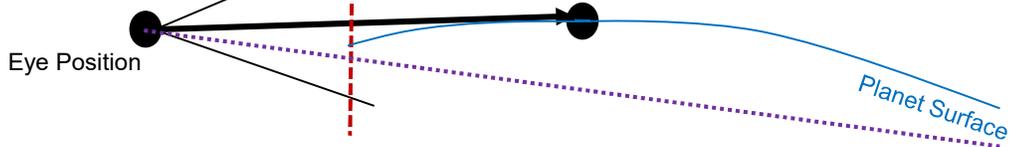

Seeing Under the Top Surface of the Planet Shows the Continents Reversed!

24




This is not just bad, it is *very* bad

We need to place the eye and the eye's near clipping plane such that no part of what the eye can see is under the planet's surface.

Here's the Viewing Strategy: Use All These Parameters to Compute N

25

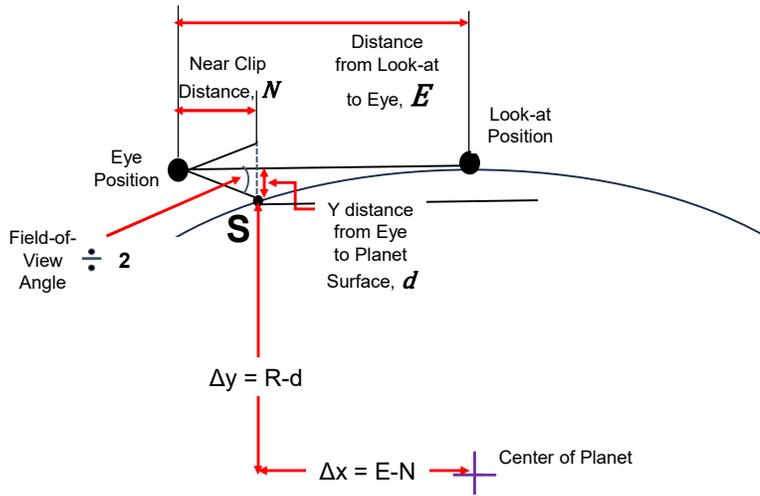

At the point **S** where the near clipping plane touches the planet surface:


$$(R - d)^2 + (E - N)^2 = R^2$$



mjb - November 2, 2023

Here's the Viewing Strategy

26

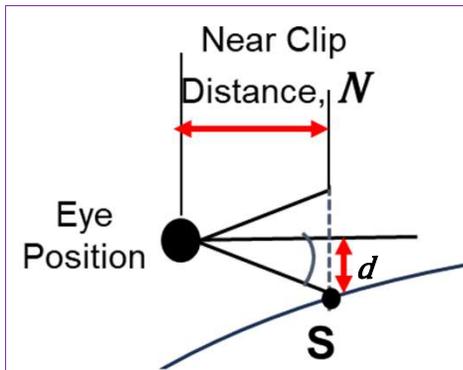

$$\frac{d}{N} = \tan\left(\frac{fov}{2}\right) = "T"$$

$$d = NT$$

At the point S:

$$(R - d)^2 + (E - N)^2 = R^2$$

$$(R - NT)^2 + (fR - N)^2 = R^2$$

$$R^2 - 2RNT + N^2T^2 + (fR)^2 - 2fRN + N^2 = R^2$$

$$N^2[T^2 + 1] + N[-2RT - 2fR] + [(fR)^2] = 0$$

$$AN^2 + BN + C = 0$$

$$N = \frac{-B \pm \sqrt{B^2 - 4AC}}{2A}$$



mjb - November 2, 2023

Here's the Viewing Strategy

27

$$N = \frac{-B \pm \sqrt{B^2 - 4AC}}{2A}$$

1. We get a good look-at position from a point on the planet.
2. We get a good eye-position by backing up a distance E from the look-at position on a line tangent to the planet.
3. We get a good value for the distance E by multiplying the planet radius by **EYEDISTFACTOR**
4. We get a good near clipping plane distance by solving the above quadratic equation.
5. Of the two solutions, we take the minimum.



By experimenting, I found decent values for f to be between 0.75 – 1.25
In these notes (slide #2), f is called **EYEDISTFACTOR**.

mjb – November 2, 2023

Converting Eye+Look Latitude-Longitude to Eye+Look XYZ – the Full Detail

28

Convert a latitude and longitude eye-position and look-at position (in *degrees*) and a planet radius to an eye position and a look-at position in XYZ coordinates. A line from the eye position to the look-at position needs to be forced to be tangent to the globe.

```
void
SetViewingFromLatLng(float eyeLat, float eyeLng, float lookLat, float lookLng, float rad, glm::vec4 * eyep, glm::vec4 * lookp, glm::vec4 * upp, float *znearp)
{
    const glm::vec3 center = glm::vec3(0., 0., 0.); // center of planet
    glm::vec3 eye = LatLngToXYZ(eyeLat, eyeLng, rad);
    glm::vec3 look = LatLngToXYZ(lookLat, lookLng, rad);
    glm::vec3 upVec = glm::normalize(look - center); // perpendicular to the globe at the look position
    glm::vec3 eyeToLook = look - eye; // vector from eye to look
    float znear; // how far in front of eye to near clipping plane

    float T = tanf(glm::radians(FOVDEG/2.f));
    float distToEye = EYEDISTFACTOR * rad; // distance from look to eye'

    glm::vec3 perpComponent = glm::dot(eyeToLook, upVec) * upVec;
    glm::vec3 tangentComponent = eyeToLook - perpComponent;
    glm::vec3 eyeprime = look - distToEye * glm::normalize(tangentComponent);

    float A = SQR(T) + 1.f;
    float B = -2.f*rad*T - 2.f*distToEye;
    float C = SQR(distToEye);
    float disc = sqrtf(SQR(B)-4.f*A*C);
    znear = (-B + disc) / (2.f*A);
    float n2 = (-B - disc) / (2.f*A);
    if(n2 < znear)
        znear = n2;

    *eyep = glm::vec4(eyeprime, 1.);
    *lookp = glm::vec4(look, 1.);
    *upp = glm::vec4(upVec, 0.);
    *znearp = znear;
}
```

Use a vector dot product to see how much of the eyeToLook vector is perpendicular to the surface. Then subtract that away to see how much of eyeToLook is tangent to the surface, which is what we want.

Standard Outside Viewing

29

Put this in the Display() function:

```

void
Display( )
{
    ...
    glm::mat4 e = MakeEarthMatrix( );
    glm::mat4 m = MakeMoonMatrix( );
    glm::vec4 eyePos = glm::vec4( 0., 0., 0., 1. ); // a position
    glm::vec4 lookPos = glm::vec4( 0., 0., 0., 1. ); // a position
    glm::vec4 upVec = glm::vec4( 0., 0., 0., 0. ); // a vector, so doesn't get translations applied
    float znear = 0.1f;

    glMatrixMode( GL_MODELVIEW );
    glLoadIdentity( );
    switch( NowView ) ← This switch statement is going to switch between four different ways of setting
    {                                     gluLookAt( ), the first is our usual look-at and the rest are for planetary views
        ...
        case OUTSIDEVIEW:                // 1st way to set gluLookAt( )
            gluLookAt( 0., 0., 30000.f, 0., 0., 0., 0., 1., 0. );
            glRotatef( (GLfloat)Yrot, 0., 1., 0. );
            glRotatef( (GLfloat)Xrot, 1., 0., 0. );
            if( Scale < MINSCALE )
                Scale = MINSCALE;
            glScalef( Scale, Scale, Scale );
            break;
        ...
    }
}

```



mjb - November 2, 2023

Earth Viewing

30

Put this in the Display() function:

```

void
Display( )
{
    ...
    glm::mat4 e = MakeEarthMatrix( );
    glm::mat4 m = MakeMoonMatrix( );
    glm::vec4 eyePos = glm::vec4( 0., 0., 0., 1. );
    glm::vec4 lookPos = glm::vec4( 0., 0., 0., 1. );
    glm::vec4 upVec = glm::vec4( 0., 0., 0., 0. ); // vectors don't get translations
    float znear = 0.1f;

    glMatrixMode( GL_MODELVIEW );
    glLoadIdentity( );
    switch( NowView )
    {
        ...
        case EARTHVIEW:                // 2nd way to set gluLookAt( )
            SetViewingFromLatLng( 0.f, 70.f, 0.f, 60.f, EARTH_RADIUS_MILES, &eyePos, &lookPos, &upVec, &znear );
            eyePos = e * eyePos;
            lookPos = e * lookPos;
            upVec = e * upVec;
            gluLookAt( eyePos.x, eyePos.y, eyePos.z, lookPos.x, lookPos.y, lookPos.z, upVec.x, upVec.y, upVec.z );
            break;
        ...
    }
}

```



mjb - November 2, 2023

Moon Viewing

31

Put this in the Display() function:

```


void
Display()
{
    ...
    glm::mat4 e = MakeEarthMatrix( );
    glm::mat4 m = MakeMoonMatrix( );
    glm::vec4 eyePos = glm::vec4( 0., 0., 0., 1. );
    glm::vec4 lookPos = glm::vec4( 0., 0., 0., 1. );
    glm::vec4 upVec = glm::vec4( 0., 0., 0., 0. ); // vectors don't get translations
    float znear = 0.1f;

    glMatrixMode( GL_MODELVIEW );
    glLoadIdentity( );
    switch (NowView)
    {
        ...
        case MOONVIEW: // 3rd way to set gluLookAt( )
            SetViewingFromLatLng(0.f, 175.f, 0.f, 170.f, MOON_RADIUS_MILES, &eyePos, &lookPos, &upVec, &znear);
            eyePos = m * eyePos;
            lookPos = m * lookPos;
            upVec = m * upVec;
            gluLookAt( eyePos.x, eyePos.y, eyePos.z, lookPos.x, lookPos.y, lookPos.z, upVec.x, upVec.y, upVec.z );
            break;
        ...
    }
}

```


Transformations In Action!

32

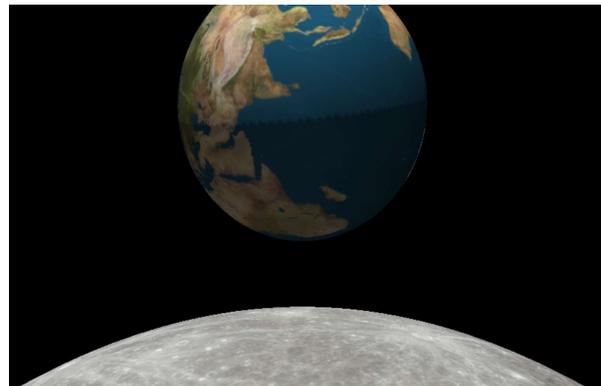

What if You Want the Eye at Corvallis (or some other arbitrary location)?

33

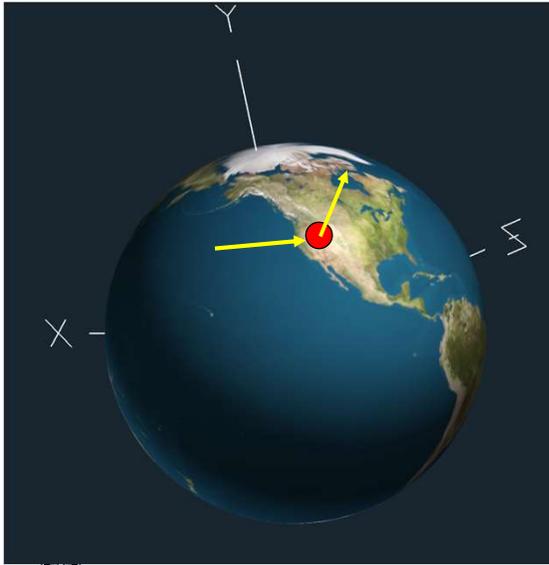

Oregon State
University
Computer Graphics

Corvallis sits at Latitude 44.57° N x Longitude 123.27° W

Treating lat-long as spherical coordinates and solve for x, y, and z:

```
float y = sinf( 44.57°);           // 0.702
float xz = cosf( 44.57° );        // 0.712
float x = -xz * sinf( 123.27° );  // -0.391
float z = xz * cosf( 123.27° );   // 0.596
```

Then multiply **x**, **y**, and **z** by EARTH_RADIUS_MILES

Because of the way the coordinates work, Corvallis's west longitude needs to positive, even though on maps, west longitude is negative.

mjb - November 2, 2023

Earth/Corvallis Viewing

34

Put this in the Display() function:

```
float y = EARTH_RADIUS_MILES * sinf( 44.57°);
float xz = cosf( 44.57° );
float x = -EARTH_RADIUS_MILES * xz * cosf( 123.27° );
float z = EARTH_RADIUS_MILES * xz * sinf( 123.27° );
```

```
void
Display()
{
    ...
    glm::mat4 e = MakeEarthMatrix( );
    glm::mat4 m = MakeMoonMatrix( );
    glm::vec4 eyePos = glm::vec4( 0., 0., 0., 1. );
    glm::vec4 lookPos = glm::vec4( 0., 0., 0., 1. );
    glm::vec4 upVec = glm::vec4( 0., 0., 0., 0. ); // vectors don't get translations
    float znear = 0.1f;

    glMatrixMode( GL_MODELVIEW );
    glLoadIdentity();
    switch( NowView )
    {
        ...
        case CORVALLISVIEW: // 4th way to set gluLookAt( )
            SetViewingFromLatLng(44.57f, 133.27f, 44.57f, 83.27f, EARTH_RADIUS_MILES, &eyePos, &lookPos, &upVec, &znear);
            eyePos = e * eyePos;
            lookPos = e * lookPos;
            upVec = e * upVec;
            gluLookAt( eyePos.x, eyePos.y, eyePos.z, lookPos.x, lookPos.y, lookPos.z, upVec.x, upVec.y, upVec.z );
            break;
            ...
    }
}
```

Oregon State
University
Computer Graphics

mjb - November 2, 2023

Transformations In Action!

35

