



**Oregon State  
University**  
Mike Bailey

mjb@cs.oregonstate.edu



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)



You can learn more at: <http://cs.oregonstate.edu/~mjb/vulkan>

Vulkan.pptx

mjb - August 27, 2024

## Who is the Real Vulkan?



Do you notice the difference? It's subtle! ☺



mjb - August 27, 2024

## Who is the Khronos Group?

3

**The Khronos Group, Inc.** is a non-profit member-funded industry consortium, focused on the creation of open standard, royalty-free application programming interfaces (APIs) for authoring and accelerated playback of dynamic media on a wide variety of platforms and devices. Khronos members may contribute to the development of Khronos API specifications, vote at various stages before public deployment, and accelerate delivery of their platforms and applications through early access to specification drafts and conformance tests.



## Playing "Where's Waldo" with Khronos Membership

4



## Who's Been Specifically Working on Vulkan?

5



## Vulkan

6

- Largely derived from AMD's *Mantle* API
- Also heavily influenced by Apple's *Metal* API and Microsoft's *DirectX 12*
- *There is no fixed-function ever – it is all shaders-based*
- Fortunately, the shader language Vulkan uses is GLSL with a few modifications
- Goal: much less driver complexity and overhead than OpenGL has
- Goal: much less user hand-holding
- Goal: able to do multithreaded graphics
- Goal: able to run on desktops and mobile devices

## Vulkan Code has a Distinct “Style” of Setting Information in structs and then Passing that Information as a pointer-to-the-struct

7

```

VkBufferCreateInfo vbc;
vbc.sType = VK_STRUCTURE_TYPE_BUFFER_CREATE_INFO;
vbc.pNext = nullptr;
vbc.flags = 0;
vbc.size = << buffer size in bytes >>
vbc.usage = VK_USAGE_UNIFORM_BUFFER_BIT;
vbc.sharingMode = VK_SHARING_MODE_EXCLUSIVE;
vbc.queueFamilyIndexCount = 0;
vbc.pQueueFamilyIndices = nullptr;

VK_RESULT result = vkCreateBuffer ( LogicalDevice, IN &vbc, PALLOCATOR, OUT &Buffer );

VkMemoryRequirements vmr;
result = vkGetBufferMemoryRequirements( LogicalDevice, Buffer, OUT &vmr ); // fills vmr


VkMemoryAllocateInfo vmai;
vmai.sType = VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_INFO;
vmai.pNext = nullptr;
vmai.flags = 0;
vmai.allocationSize = vmr.size;
vmai.memoryTypeIndex = 0;

result = vkAllocateMemory( LogicalDevice, IN &vmai, PALLOCATOR, OUT &MatrixBufferMemoryHandle );
result = vkBindBufferMemory( LogicalDevice, Buffer, IN MatrixBufferMemoryHandle, 0 );
    
```

## Vulkan Command Buffers

8

- Graphics commands are sent to command buffers
- Think OpenCL...
- E.g., `vkCmdDoSomething( cmdBuffer, ... );`
- You can have as many simultaneous Command Buffers as you want
- Buffers are flushed when the application wants them flushed
- Each command buffer can be filled from a different thread (i.e., filling is thread-safe)

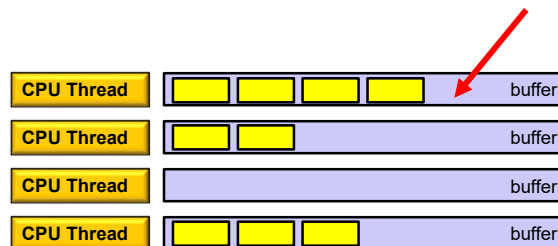


## Vulkan Graphics Pipelines

9

- In OpenGL, your graphics “pipeline state” is whatever combination you most recently set: color, transformations, textures, shaders, etc.
- In OpenGL, changing the state is relatively time-consuming.
- Vulkan forces you to set all your state at once into a “pipeline state object” (PSO) and then invoke the entire PSO whenever you want to use that state combination.
- Potentially, you could have thousands of these pre-prepared states – if there are N things to set, there could be N! possible combinations.
- Think of each pipeline state as being unchangeable.
- I thought the game companies were going to hate this, but they didn't.

## Vulkan: Creating a Pipeline

10

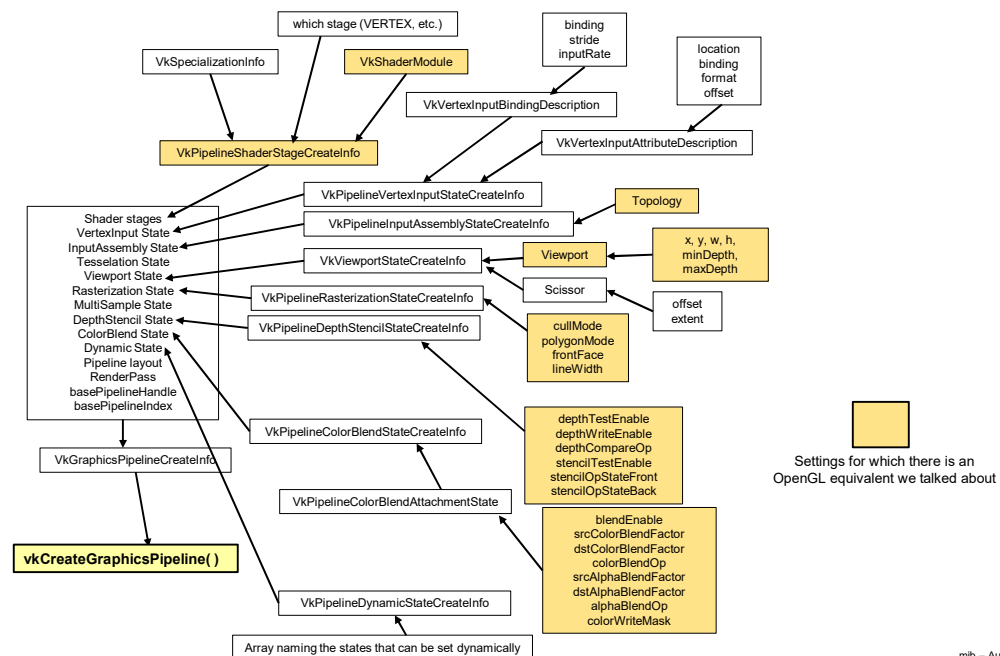

## Vulkan GPU Memory

11

- Your application allocates GPU memory for the objects it needs
- Your application is responsible for making sure that what you put into that memory is actually in the right format, is the right size, etc.

## Vulkan Synchronization

12


- Events can be set, polled, and waited for (much like OpenCL)
- Vulkan does not ever synchronize – that's the application's (i.e., your) job

## Vulkan Shaders

13

GLSL is the same as before ... well, almost – here's what's different:

- An implied **#define VULKAN 100** is automatically supplied by the compiler
- You pre-compile your shaders with an external compiler called **glslang**
- Your shaders get turned into a vendor-independent intermediate form known as SPIR-V
- SPIR-V gets turned into fully-compiled, vendor-specific code at runtime
- The SPIR-V spec has been public for years – new shader languages could be developed
- OpenCL and OpenGL have adopted SPIR-V as well



### Advantages:

1. Software vendors don't need to ship their shader source
2. Software can launch faster because half of the compilation has already taken place
3. This guarantees a common front-end syntax
4. This allows for other language front-ends




mjb – August 27, 2024

## SPIR-V

14

SPIR-V stands for **Standard Portable Intermediate Representation – Vulkan**. It's the file format that Vulkan GLSL shaders get compiled into. The name of that front-end compiler is **glslang**. At runtime, that file is read and the driver compiles it the rest of the way into the machine instruction set for that particular graphics card.

SPIR-V started out as something for Vulkan but is now also used with OpenGL and OpenCL. Here is how it fits into the overall Khronos Ecosystem:

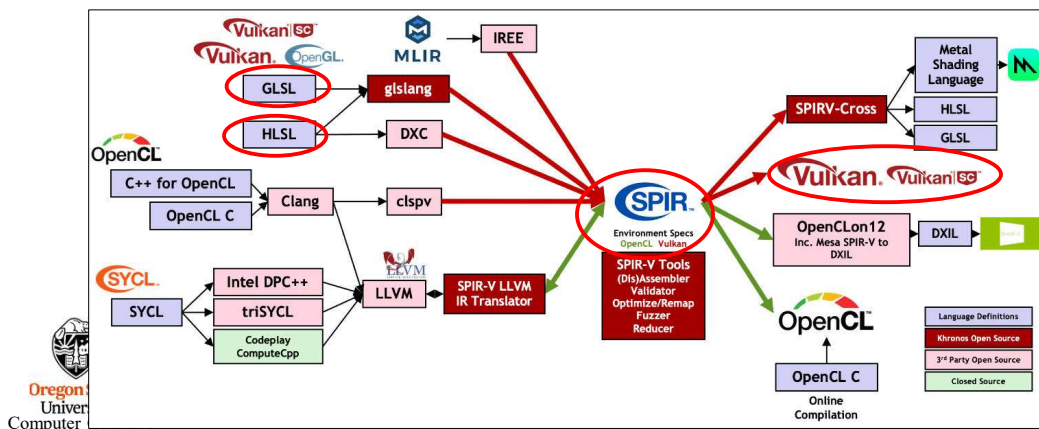

mjb – August 27, 2024



## Ray-tracing Acceleration is Appearing in Graphics Hardware and it has been Added to the Vulkan API

15




Oregon State  
University  
Computer Graphics

<https://www.gamingonlinux.com/2020/12/quake-ii-rtx-adds-support-for-the-official-cross-vendor-vulkan-ray-tracing/page=2/#images-2>

mjb - August 27, 2024

## Ray-tracing Acceleration is Appearing in Graphics Hardware and it has been Added to the Vulkan API

16

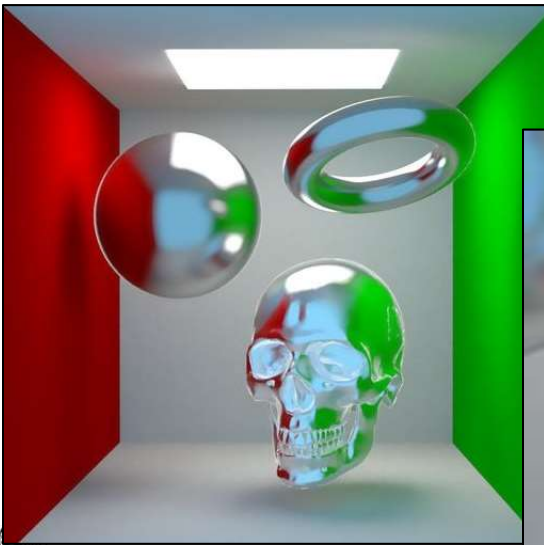

Oregon State  
University  
Computer Graphics


<https://www.geeks3d.com/hacklab/20210115/more-vulkan-raytracing-in-geexlab/>

mjb - August 27, 2024



## The Vulkan Ray Tracing Pipeline Involves Five New Shader Types

17

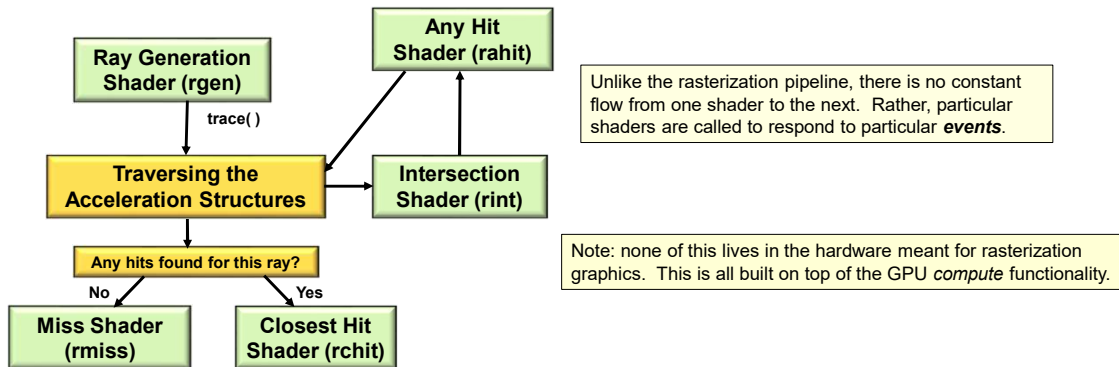

- A **Ray Generation Shader** runs on a 2D grid of threads. It begins the entire ray-tracing operation.
- An **Intersection Shader** implements ray-primitive intersections.
- An **Any Hit Shader** is called when the Intersection Shader finds a hit. It decides if that intersection should be accepted or ignored.
- The **Closest Hit Shader** is called with the information about the hit that happened closest to the viewer. Typically, lighting is done here, or firing off new rays to handle shadows, reflections, and refractions.
- A **Miss Shader** is called when no intersections are found for a given ray. Typically, it just sets its pixel color to the background color.




mjb - August 27, 2024

## Ray-Tracing Acceleration Structures

18

- A Bottom-level Acceleration Structure (BLAS) reads the vertex data from vertex (and possibly index VkBuffers) to determine Axis-Aligned Bounding Boxes (AABBs).
- You can also supply your own AABB information to a BLAS.
- A single Top-level Acceleration Structure (TLAS) holds Instances, which are transformations and pointers to 9potentially) multiple BLASes.
- Each BLAS is essentially used as a Model Coordinate bounding box, while the single TLAS is used as a World Coordinate bounding box.

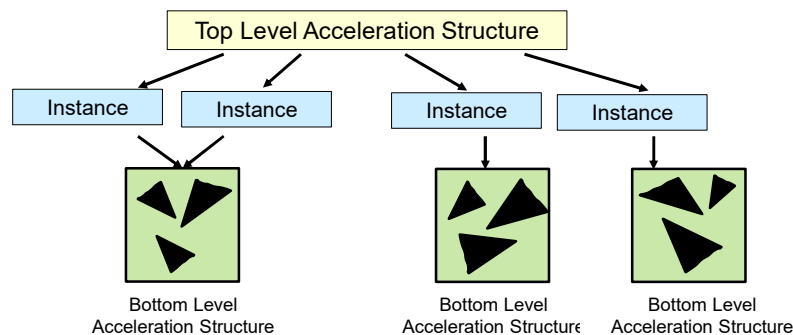

mjb - August 27, 2024

## So What Do We All Do Now?

19


- I don't see Vulkan replacing OpenGL *ever*
- I see the OSU CS 450/550 class using OpenGL *forever*
- I see the OSU Vulkan class as always being a one-term standalone course, not part of another OpenGL-based course



## So What Do We All Do Now?

20

This is what I think the model of the immediate future is:

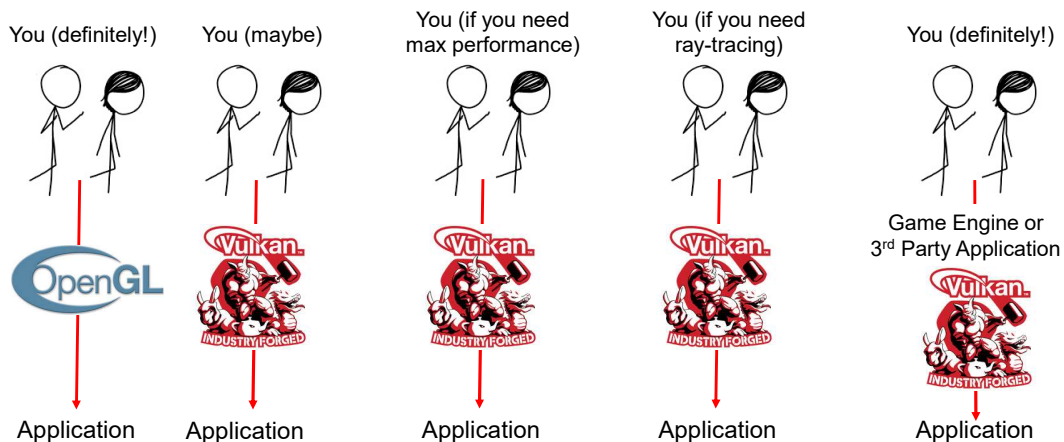

You can learn more at: <http://cs.oregonstate.edu/~mjb/vulkan>