



Using the Stencil Buffer



Oregon State University

Mike Bailey
mjb@cs.oregonstate.edu




This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/)

 Oregon State University Computer Graphics

stencilbuffer.pptx mjb - September 2, 2024


1

The Framebuffers

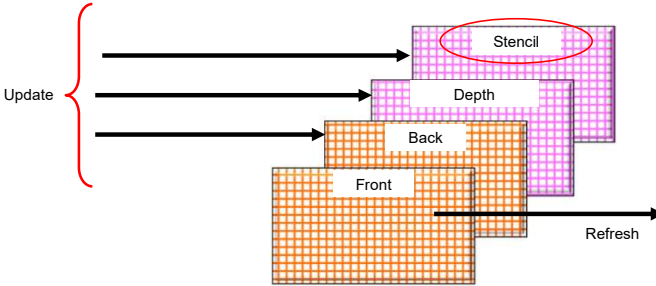

Here's what the Stencil Buffer can do for you:


1. While drawing into the Back Buffer, you can write values into the Stencil Buffer at the same time.
2. While drawing into the Back Buffer, you can do arithmetic on values in the Stencil Buffer at the same time.
3. While drawing into the Back Buffer, the Stencil Buffer can be used to write-protect certain parts of the Back Buffer.

 Oregon State University Computer Graphics


mjb - September 2, 2024

2

You Can Think of the Stencil Buffer as a Separate Framebuffer, or, You Can Think of it as being Per-Pixel

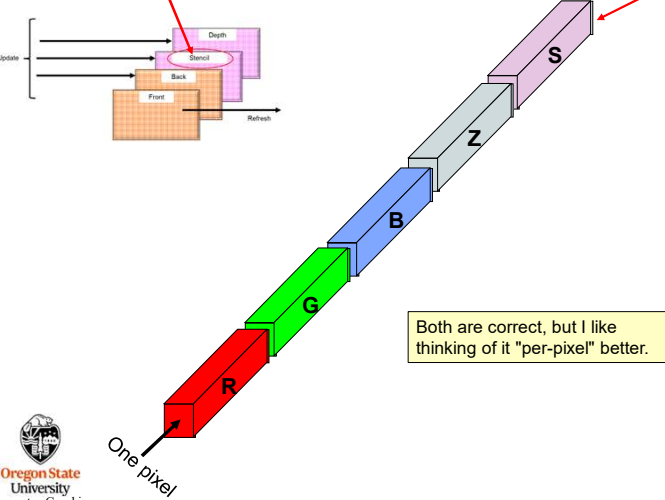

Both are correct, but I like thinking of it "per-pixel" better.

 Oregon State University Computer Graphics

mjb - September 2, 2024

3

The Stencil Buffer is Tested Per-Pixel, Very Much Like the Depth Buffer

glStencilFunc(func, ref, mask)

This specifies the comparison test that is to be done per-pixel.

func can be any of GL_NEVER, GL_ALWAYS, GL_EQUAL, GL_NOTEQUAL, GL_LESS, GL_LEQUAL, GL_GREATER, GL_GEQUAL

ref is an integer reference value that is used to test the pixel's existing stencil value against using the chosen **func**


mask is set to 1 in all these examples

The stencil test produces a *true* or *false* value at each pixel where drawing is to be done.

```

if( ref <func> S_existing is true )
{
    Allow the color write to the existing pixel to take place;
    Modify the pixel's existing stencil value depending on what the glStencilOp says to do;
}

```

 Oregon State University Computer Graphics

mjb - September 2, 2024

4

This Tells You What to Do with the *true* or *false* Value from the Stencil Test

glStencilOp(sfail, zfail, zpass)

This specifies how a pixel's stencil value is modified when a fragment passes or fails the stencil test depending on what combinations of *true* and *false* the stencil test and the depth buffer test produce. If the stencil test fails, then *sfail* happens. If the stencil test succeeds, then either *zfail* or *zpass* happen depending on if the depth-buffer test failed or succeeded.

The three values can be any of:

GL_KEEP	Retain the existing stencil value
GL_ZERO	Set the stencil value to zero
GL_REPLACE	Replace the stencil value with ref from the Stencil Func
GL_INCR	Increment the stencil value, with clamping
GL_INCR_WRAP	Increment the stencil value, without clamping
GL_DECR	Decrement the stencil value, with clamping
GL_DECR_WRAP	Decrement the stencil value, without clamping
GL_INVERT	Bitwise toggle the stencil bits: 0's → 1's, 1's → 0's



```
if( ref <func> S_existing is true )
{
    Allow the color write to the existing pixel to take place;
    Modify the pixel's existing stencil value depending on what the glStencilOp says to do;
}
```

mjb - September 2, 2024

5

Setting Up the Stencil Buffer

// at the top of the program:

```
const int STENCILBIT = 1;
const int DEFAULT_STENCIL = 0;
const float BIGX = 2.;
const float BIGY = BIGX;
const float CLOSEZ = -1.;
float Xlens, Ylens;
float Box = 0.40f;
```

// in InitGraphics():

```
glutInitDisplayMode( GLUT_RGBA | GLUT_DOUBLE | GLUT_DEPTH | GLUT_STENCIL );
```

```
glClearColor( BACKGROUND_COLOR );
glClearStencil( DEFAULT_STENCIL );
```

// in Display():


```
...
glClear( GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT | GL_STENCIL_BUFFER_BIT );
...
glEnable( GL_STENCIL_TEST );
...
```

University
Computer Graphics

mjb - September 2, 2024

6

Using the Stencil Buffer to Create a *Magic Lens*

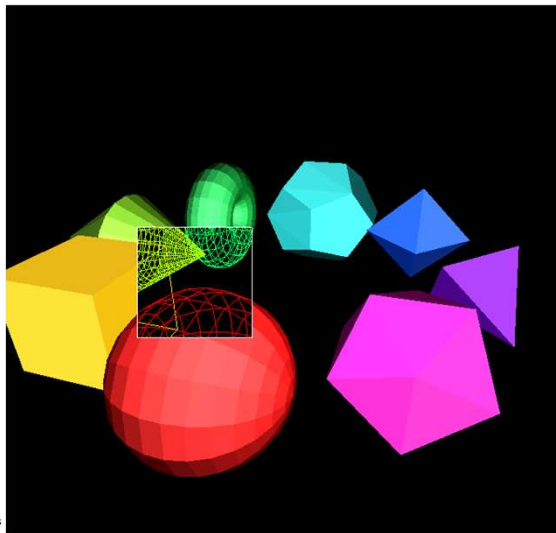


mjb - September 2, 2024

7

Using the Stencil Buffer to Create a *Magic Lens*

1. Clear the SB = 0
2. Enable the SB
3. Write protect the color buffer and depth buffer
4. Draw a filled square, while setting SB = 1
5. Write-enable the color buffer and depth buffer
6. Draw the solids wherever SB == 0
7. Draw the wireframes wherever SB == 1
8. Disable the SB

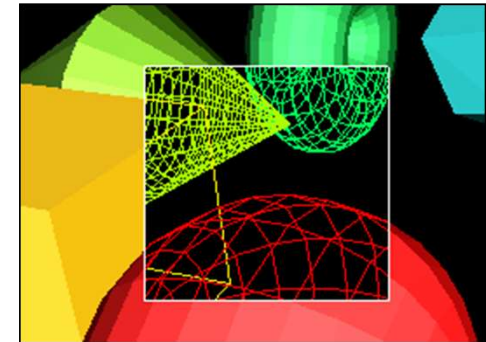

mjb - September 2, 2024

8

Moving the Magic Lens with the Middle Mouse Button

9

```
// in MouseMotion():
if( ActiveButton & MIDDLE )
{
    if( Stencil == LENS )
    {
        int w = glutGet( GLUT_WINDOW_WIDTH );
        int h = glutGet( GLUT_WINDOW_HEIGHT );
        Xlens = 2.*(float)x/(float)w - 1.;
        Ylens = -2.*(float)y/(float)h + 1.;
    }
    else
    {
        Scale += SCLFACT * (float) ( dx - dy );
    }
}
```

x/w ranges from 0. to 1.
y/h ranges from 1. to 0
Xlens and Ylens range from -1. to 1. (NDC)



mjb - September 2, 2024

9

Using the Stencil Buffer to Create a Magic Lens

10

```
glMatrixMode( GL_PROJECTION );
glLoadIdentity();

glMatrixMode( GL_MODELVIEW );
glLoadIdentity();

glDepthMask( GL_FALSE );
glColorMask( GL_FALSE, GL_FALSE, GL_FALSE, GL_FALSE );

glStencilFunc( GL_ALWAYS, 1, STENCILBIT );
glStencilOp( GL_REPLACE, GL_REPLACE, GL_REPLACE );

glBegin( GL_QUADS );
    glVertex2f( Xlens-Box/2., Ylens-Box/2. );
    glVertex2f( Xlens+Box/2., Ylens-Box/2. );
    glVertex2f( Xlens+Box/2., Ylens+Box/2. );
    glVertex2f( Xlens-Box/2., Ylens+Box/2. );
glEnd();

glColorMask( GL_TRUE, GL_TRUE, GL_TRUE, GL_TRUE );
glDepthMask( GL_TRUE );
```

These two identity transformation matrices cause the drawing to take place in NDC (-1 to 1.), which is what Xlens, Ylens, and Box are defined in

Write protect the depth and color buffers

Everywhere we draw, always replace the stencil value with a 1

Draw a filled-in box

Write-enable the depth and color buffers



mjb - September 2, 2024

10

Using the Stencil Buffer to Create a Magic Lens

11

```
<< set the GL_PROJECTION and GL_MODELVIEW matrices as normal >>

glEnable( GL_LIGHTING );
glStencilFunc( GL_EQUAL, 0, STENCILBIT );
glStencilOp( GL_KEEP, GL_KEEP, GL_KEEP );
glShadeModel( GL_SMOOTH );
for( int i = 0; i < 8; i++ )
{
    glCallList( SolidLists[ i ] );
}

glDisable( GL_LIGHTING );
glStencilFunc( GL_EQUAL, 1, STENCILBIT );
glStencilOp( GL_KEEP, GL_KEEP, GL_KEEP );
glShadeModel( GL_FLAT );
for( int i = 0; i < 8; i++ )
{
    glCallList( WireLists[ i ] );
}

<< set the GL_PROJECTION and GL_MODELVIEW matrices to identity again >>

glDisable( GL_LIGHTING );
glShadeModel( GL_FLAT );
glDisable( GL_DEPTH_TEST );
glColor3f( 1., 1., 1. );
glBegin( GL_LINE_LOOP );
    glVertex2f( Xlens-Box/2., Ylens-Box/2. );
    glVertex2f( Xlens+Box/2., Ylens-Box/2. );
    glVertex2f( Xlens+Box/2., Ylens+Box/2. );
    glVertex2f( Xlens-Box/2., Ylens+Box/2. );
glEnd();
glEnable( GL_DEPTH_TEST );
```

Draw the solids everywhere except inside the lens

Draw the wireframes only inside the lens


Draw the boundary of the lens



mjb - September 2, 2024

11

I Once Used the Stencil Buffer to Create a Magic Lens for Volume Data¹²

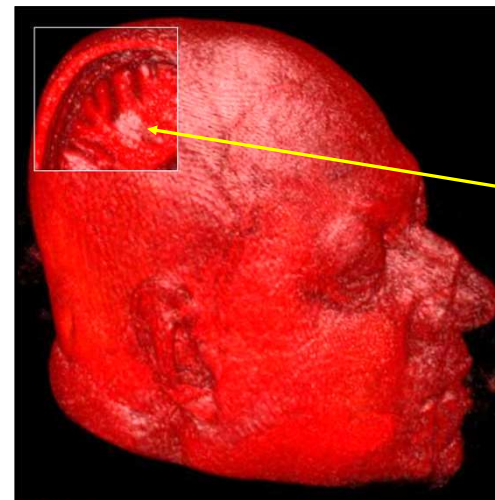

University Computer Graphics


In this case, the scene inside the lens was created by drawing the same object, but drawing it with its near clipping plane positioned partways into the data

mjb - September 2, 2024

12

Using the Stencil Buffer to Perform Polygon Capping

13

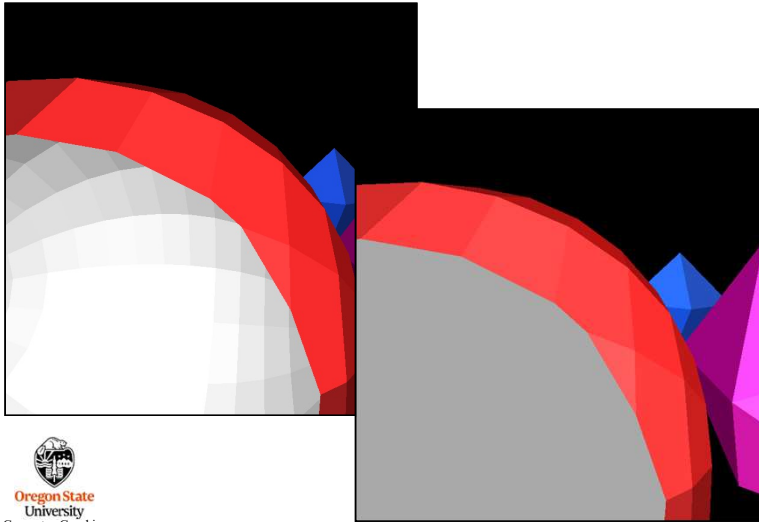


13

Using the Stencil Buffer to Perform Polygon Capping

14

1. Clear the SB = 0
2. Enable the SB
3. Draw the polygons, setting SB = ~SB: 0's → 1's, 1's → 0's
4. Draw a large gray polygon in front of the entire scene wherever SB != 0
5. Disable the SB



14

Using the Stencil Buffer to Perform Polygon Capping

15

```
glStencilFunc( GL_ALWAYS, 0, STENCILBIT );
glStencilOp( GL_INVERT, GL_INVERT, GL_INVERT );
<< draw all objects >>
```

As we draw the **solid** objects,
always invert the stencil bits:
0's → 1's
1's → 0's

Because these were all **solid** objects, they had a front face and a back face drawn. Thus, most of the time, the SB values got inverted back to 0. If they didn't, that means that the solid object penetrated the near clipping plane and now needs to be capped.

```
glMatrixMode( GL_PROJECTION );
glLoadIdentity( );
```

```
glMatrixMode( GL_MODELVIEW );
glLoadIdentity( );
```

```
glDisable( GL_LIGHTING );
glDisable( GL_LIGHT0 );
glStencilFunc( GL_NOTEQUAL, 0, STENCILBIT );
glStencilOp( GL_KEEP, GL_KEEP, GL_KEEP );
glShadeModel( GL_FLAT );
glColor3f( .5f, .5f, .5f );
glBegin( GL_QUADS );
glVertex3f( -BIGX, -BIGY, CLOSEZ );
glVertex3f( BIGX, -BIGY, CLOSEZ );
glVertex3f( BIGX, BIGY, CLOSEZ );
glVertex3f( -BIGX, BIGY, CLOSEZ );
glEnd( );
```


Only draw the large gray plane
in front where the SB != 0

15

Using the Stencil Buffer to Draw Better Polygon Outlines

16

Before



After



Z-fighting

16

Using the Stencil Buffer to Draw Better Polygon Outlines

17

```

Clear the SB = 0

Enable the SB

for( each polygon )
{
    Draw the edges, setting SB = 1
    Draw the filled polygon wherever SB != 1
    Draw the edges again, setting SB = 0
}

Disable the SB
    
```




mjb - September 2, 2024

17

Outlining Polygons the Naïve Way Results in Z-Fighting

18

1. Draw all polygons
2. Draw all edges

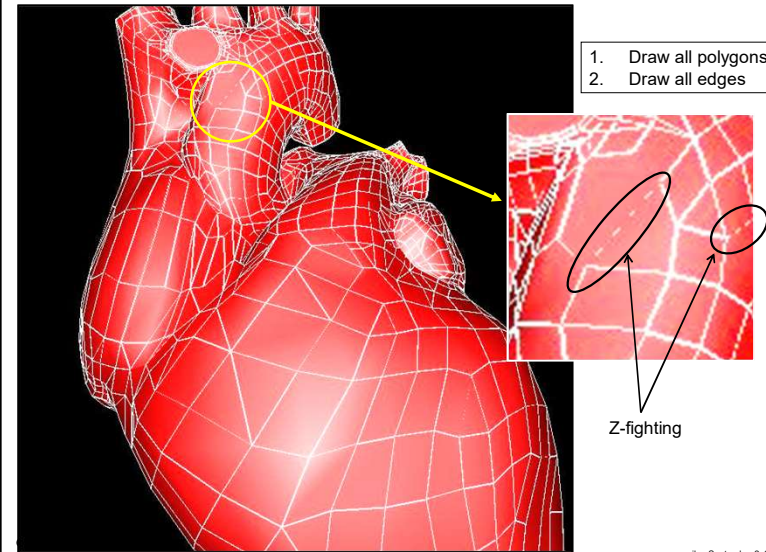


mjb - September 2, 2024

18

Using the Stencil Buffer to Draw Better Polygon Outlines

19

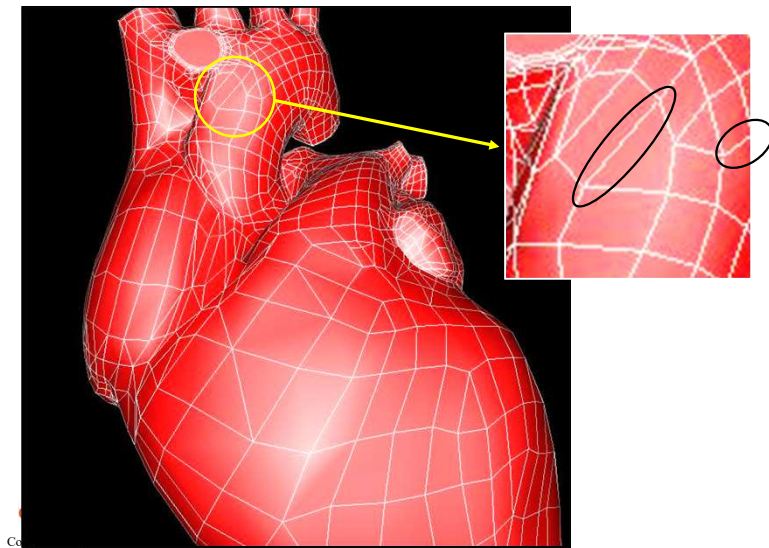

mjb - September 2, 2024

19

Using the Stencil Buffer to Draw Better Polygon Outlines

20

```

for( int f = 0; f < NumFaces; f++ )
{
    glStencilFunc( GL_ALWAYS, 1, STENCILBIT );
    glStencilOp( GL_REPLACE, GL_REPLACE, GL_REPLACE );
    glDisable( GL_LIGHTING );
    glShadeModel( GL_FLAT );
    glColor3f( 1, 1, 1 );
    glBegin( GL_LINE_LOOP );
    for( int v = FirstVertex[f]; v < FirstVertex[f+1]; v++ )
    {
        glVertex3f( Vertices[v].x, Vertices[v].y, Vertices[v].z );
    }
    glEnd();

    glStencilFunc( GL_EQUAL, 0, STENCILBIT );
    glStencilOp( GL_KEEP, GL_KEEP, GL_KEEP );
    glEnable( GL_LIGHTING );
    glShadeModel( GL_SMOOTH );
    glMaterialfv( ... );
    glBegin( GL_POLYGON );
    for( int v = FirstVertex[f]; v < FirstVertex[f+1]; v++ )
    {
        glNormal3f( Normals[v].x, Normals[v].y, Normals[v].z );
        glVertex3f( Vertices[v].x, Vertices[v].y, Vertices[v].z );
    }
    glEnd();

    glStencilFunc( GL_ALWAYS, 0, STENCILBIT );
    glStencilOp( GL_REPLACE, GL_REPLACE, GL_REPLACE );
    glDisable( GL_LIGHTING );
    glShadeModel( GL_FLAT );
    glColor3f( 1, 1, 1 );
    glBegin( GL_LINE_LOOP );
    for( int v = FirstVertex[f]; v < FirstVertex[f+1]; v++ )
    {
        glVertex3f( Vertices[v].x, Vertices[v].y, Vertices[v].z );
    }
    glEnd();
}
    
```

Put "masking tape" down on the polygon edges

Paint the polygon, which also paints the edges

Pull the "masking tape" up and paint just the polygon edges




mjb - September 2, 2024

20

Using the Stencil Buffer to Perform Hidden Line Removal

21

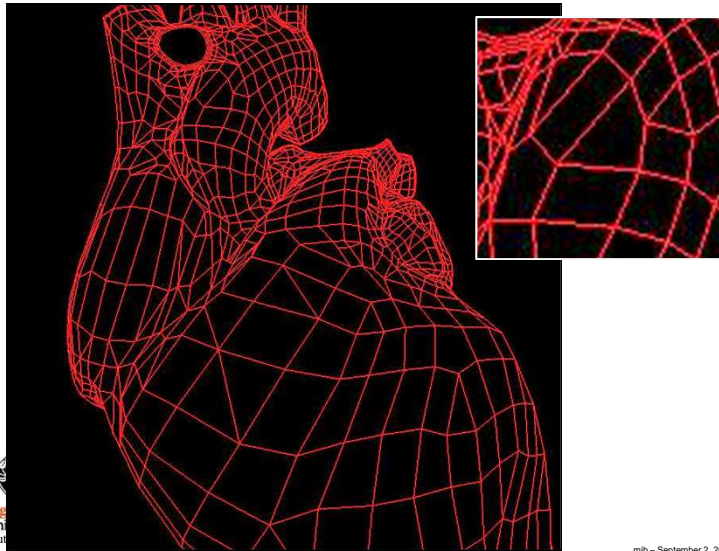

21

Using the Stencil Buffer to Perform Hidden Line Removal

22

```

Clear the SB = 0
Enable the SB

for( each polygon )
{
    Draw the edges, setting SB = 1
    Draw the polygon, unlit and flat shaded, in the background color wherever SB != 1
    Draw the edges again, setting SB = 0
}

Disable the SB
    
```




mjb - September 2, 2024

22

Before

After

After-After

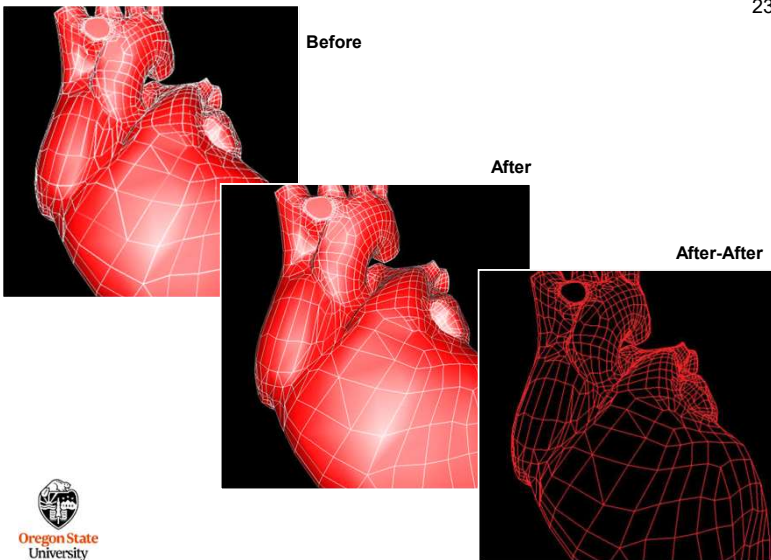


mjb - September 2, 2024

23

Hidden Line Removal for Pre-Vis for the 2019 Movie *Dumbo*

24

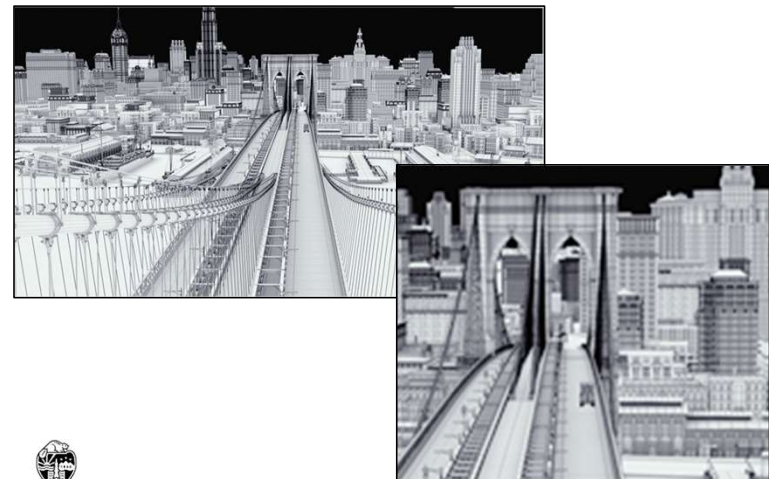


mjb - September 2, 2024


24

Hidden Line Removal in Construction Shows

25

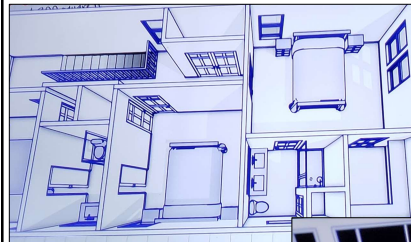

I've noticed that some of the construction reality TV shows use hidden line removal like this, presumably to create a blueprint-ish effect. This came from the show *Good Bones*.

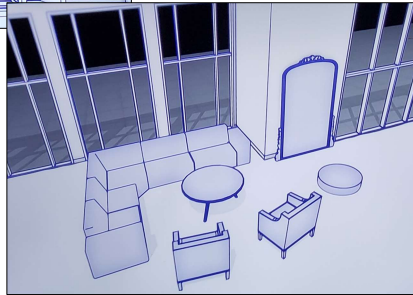

mjb - September 2, 2024



25

Stencil Buffers can be used to Create Portals

26

Here we have a room with a teapot in it and a hole in the Back Wall. You can tell that it is a hole because the axes obviously go through it. Clearly there is nothing behind the Back Wall.

But if we look at the scene from within the room, there is indeed a 3D object (the orange torii) seen through the hole. The hole is acting like a "portal" to another 3D space.

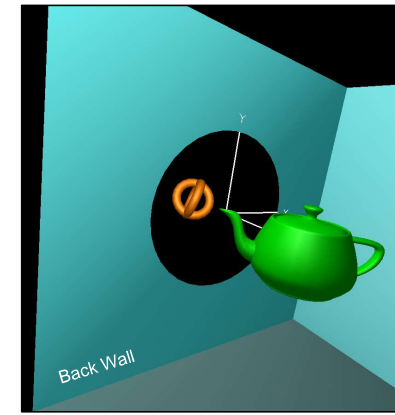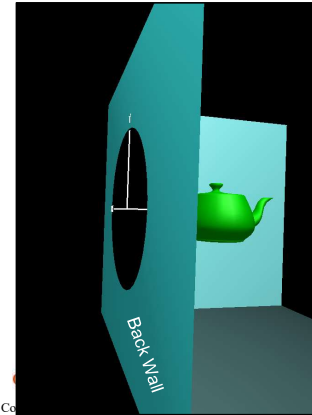

26

Stencil Buffers can be used to Create Portals


27

Here's the process:

1. Draw the teapot and the axes like normal
2. Turn off writing into the depth and color framebuffers
3. Draw an invisible large square behind the Back Wall setting SB=1
4. Draw an invisible circle on that wall setting SB=0
5. Draw an invisible large square behind the back Wall between there and the viewer setting SB=1
6. Draw the cyan room walls and the orange torii only where SB=0 - this makes the portal

The first large square (SB=1) plus circle (SB=0) ends up making the Stencil Buffer look like this:

1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	0	0	0	0	1	1	1	1	1
1	1	1	1	1	0	0	0	0	0	1	1	1	1	1
1	1	1	1	0	0	0	0	0	0	1	1	1	1	1
1	1	1	1	0	0	0	0	0	0	1	1	1	1	1
1	1	1	1	0	0	0	0	0	0	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



mjb - September 2, 2024

27