


- OpenDX**
- Started out life as *IBM Visualization Data Explorer*
 - When the product was cancelled, IBM put it into Open Source and renamed it *OpenDX*
 - Basic premise is a series of interconnected modules, living together in an environment called the Visual Program Editor (VPE)
 - There are lots of provided modules
 - You can also write your own
- <http://www.opendx.org>
<http://www.vizsolutions.com>
<http://cs.oregonstate.edu/~mjb/opendx>
- OSU Oregon State University
Computer Graphics
- mjb - March 6, 2009

Steps in Creating a Visualization

OSU Oregon State University
Computer Graphics


mjb - March 6, 2009

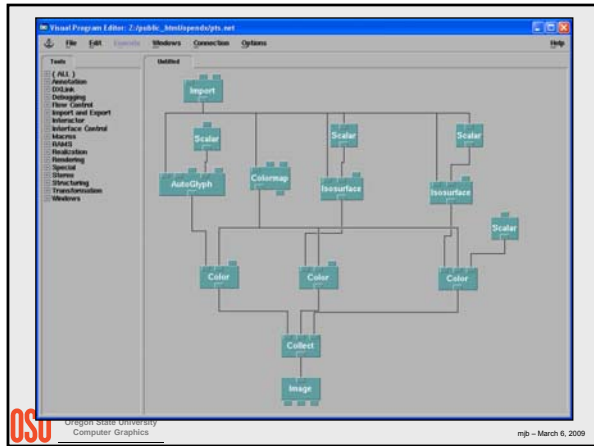

- Seven Steps to Creating a Visualization**
1. Get the data
 2. Formulate a scientific strategy. What do you want to show? How do you want to show it?
 3. Import the data
 4. Create a *simple* OpenDX network
 5. Incrementally embellish the network. Save it often!
 6. Choose what quantities you want to interact with. Change the Interactor styles to match the quantities being modified.
 7. Create the output.
- OSU Oregon State University
Computer Graphics
- mjb - March 6, 2009

Starting OpenDX in OSU's Computer Graphics Education Lab

The OpenDX Main Menu

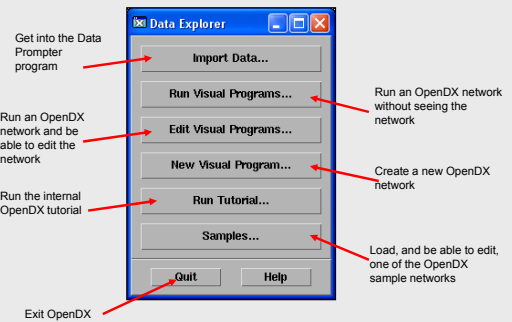


Starting OpenDX on the OSU CGEL Systems

1. Start → All Programs → WRQ Reflection → Reflection X
2. In the *View* menu, click off *X Desktop*
3. Minimize the Reflection X window (the _ in the upper right corner)
4. Start → All Programs → OpenDX → DX




Quitting OpenDX on the OSU CGEL Systems

1. Select *Quit* from the OpenDX Main Menu
2. Maximize the Reflection X window by clicking here in the Task Bar
3. In the *File* menu, select *Exit*



Nine Categories of OpenDX Modules



The OpenDX Main Menu and Categories of Modules

Annotation OpenDX Modules

- **AutoAxes** – creates an axis box for whatever data you are plotting
- **AutoGlyph** – designs and produces glyphs for the data based on the data values
- **Caption** – creates caption text for an image
- **ColorBar** – creates a colorbar to be displayed
- **Format** – creates a string from a number (used to create file names)
- **Glyph** – produces an identical glyph for every point in the data
- **Legend** – produces a legend to be displayed
- **Plot** – creates a 2D plot
- **Ribbon** – creates a flow field ribbon
- **Text** – displays text in 3D space
- **Tube** – creates a flowfield tube

Debugging OpenDX Modules

- Describe – describes an object
- Print – prints information about a field to the Message Window

Realization OpenDX Modules

- AutoGrid – maps a set of scattered points onto a grid
- Band – divides a field into bands
- Connect – creates triangle connections for scattered data points in a field
- IsoSurface – creates surfaces or lines of constant data value
- MapToPlane – projects a data field onto an arbitrary plane
- RubberSheet – deforms a surface field by the amount of the data value at each point
- ShowBox – creates a bounding box for display
- ShowConnections – displays the outline of connectivity elements in a field
- ShowPositions – displays the positions in a field
- Streakline – computes an advection path through a changing flow field
- Streamline – computes a path through a non-changing flow field

Import & Export OpenDX Modules

- Export – writes data from OpenDX into a file
- Import – reads data into OpenDX from a file
- ImportSpreadsheet – reads data into OpenDX from a tabular file
- Include – includes or excludes points in a field based on their data values
- ReadImage – reads an image into OpenDX from a file
- Reduce – filters and resamples a field into a lower resolution
- Refine – interpolates a field into a higher resolution
- Slab – takes a positional subset of the data
- Slice – takes a positional slice through the data
- WriteImage – writes an image from OpenDX into a file

Rendering OpenDX Modules

- AmbientLight – specifies the ambient light
- Arrange – creates a single side-by-side image from a collection of images
- AutoCamera – selects a good camera view of the data
- Camera – specifies a camera view
- Display – a more elaborate image-rendering system than Image
- Image – renders and displays field data
- Light – specifies a distant (parallel) light source
- Normals – compute point or face normals for shading a surface
- Render – renders a field and creates an image
- Rotate – rotates field data
- Scale – scales field data
- Shade – specifies object-shading parameters
- Transform – performs a general matrix transform of an object
- Translate – translates field data

Interactor OpenDX Modules

- FileSelector – presents a dialog box to let you select a file
- Integer – allows the user to input an integer number
- Scalar – allows the user to input a floating point number
- Selector – allows the user to select one of a number of options
- String – allows the user to input a string
- Toggle – allows the user to select one of two options
- Vector – allows the user to input a vector


Special OpenDX Modules

- Colormap – presents an interactive tool for specifying color vs. data value
- Receiver – receives the output of a Transmitter
- Sequencer – creates an animation "VCR" display
- Transmitter – "wirelessly" connects a network to a receiver

Structuring OpenDX Modules

- Collect – collects objects into a group
- Inquire – returns information about a field
- Mark – marks a new field component as "data" (e.g., for Compute)
- Remove – removes a specified component from a field
- Rename – renames a specified component in a field
- Unmark – undoes the effects of Mark

Adding a Module into the Visual Editing Area

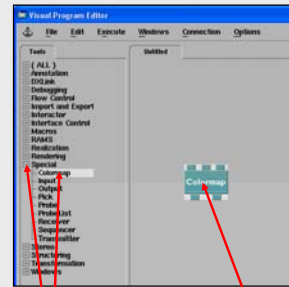


It's not drag-and-drop, it's click-and-click

1. Left-click on the module category to list its modules.
2. Left-click on the module you want to add
3. Move the cursor into the Editing Area and left-click

Transformation OpenDX Modules

- AutoColor – automatically color a data field (blue→green→red)
- Color – assign a color by name of by RGB values
- Compute – perform point-by-point arithmetic on a field's "data" component
- DivCurl – computes the divergence and curl of a flow field
- Equalize – apply histogram equalization to a field
- Gradient – computes the gradient of a scalar field
- Histogram – creates a histogram that can be rendered with Plot
- Map – projects one field's data onto another field's geometry
- Measure – calculates surface area and volume of a geometry (e.g., isosurface)
- SimplifySurface – reduces the size of the triangular mesh
- Statistics – computes the mean, standard deviation, variance, minimum, and maximum of a field's data

Connecting Modules in the Visual Editing Area



If an input tab is in the "up" position, you are allowed to try to connect to it.

If an input tab is "down", then it has already been set to a constant within the module itself, and cannot take an external connection until that constant has been un-set.


Just because an input tab is up, however, doesn't mean that this input is data-compatible with the output you are trying to connect to it. Data-compatibility is indicated by the input tab(s) turning bright green.

This, however, still doesn't imply that the connection makes logical sense. ☹

1. Left-click on the output tab of the module you are connecting from
2. Keeping the left button down, drag to the input tab of the module you are connecting to
3. When you get close, the tabs to which a connection make sense will highlight in green
4. Move the cursor on top of the tab you want to connect to, and release the left mouse button
5. To disconnect, reverse the process. Click on the input tab and drag back to the output tab.

Adding and Connecting Modules

Some Modules Can Have Variable Numbers of Tabs

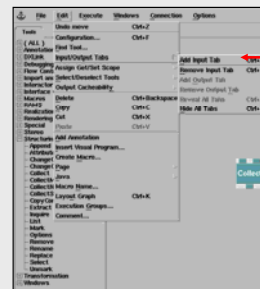

Edit→Input/Output Tabs→Add Input Tab



Collect and Compute are two common modules that work this way

Terrain Visualization

mpb - March 6, 2009

Terrain Visualization

mpb - March 6, 2009

Terrain Visualization

Start simply, then embellish!

mpb - March 6, 2009

The Colormap Editor Module

- The first input "tab" is the field input.
- Click on the Hue, Saturation, Value, or Opacity labels to edit that curve.
- Double-click on a line to add a control point there.
- Click on a control point to select it.
- Sweep a box over several control points to select them all.
- Hold down the left mouse button on a control point to move it. If several are currently selected, all will move together.
- Edit → Delete to remove selected control point(s).

The data value range over which the colors apply is determined by scanning the data itself.

mpb - March 6, 2009

The Import and FileSelector Modules

You can type a filename into the Import module, but hooking in a FileSelector module makes it way easier and friendlier

mpb - March 6, 2009

The Colormap Editor in Action

mpb - March 6, 2009

Rubbersheeting the Terrain Surface

Special

OSU Oregon State University Computer Graphics mp - March 6, 2009

Image Window Options

The *Mode* option lets you set what scene transformation the mouse will perform.

OSU Oregon State University Computer Graphics mp - March 6, 2009

The Image Window

OSU Oregon State University Computer Graphics mp - March 6, 2009

Image Window Options

The *View Control* option lets you set various aspects of how the scene will appear.

Same as the *Mode* option

Set a pre-defined view

Specify Perspective or Orthographic 3D projection

If using Perspective, this specifies the field-of-view angle. The larger this number, the more severe the perspective will be.

OSU Oregon State University Computer Graphics mp - March 6, 2009

Image Window Options

The *AutoAxes* option has many ways to embellish the visualization with axes, labels, grids, etc.

OSU Oregon State University Computer Graphics mp - March 6, 2009

Scalar Visualization

OSU Oregon State University Computer Graphics mp - March 6, 2009

Glyphs

Realization

OSU Oregon State University Computer Graphics mpb - March 6, 2009

Isosurfaces

Realization

OSU Oregon State University Computer Graphics mpb - March 6, 2009

3D Cutting Plane – Interpolated Colors

MapToPlane interpolates the 3D field onto the given plane. The first argument is the field, the second is a 3D point on the plane, and the third argument is a 3D normal to the plane.

Realization

OSU Oregon State University Computer Graphics mpb - March 6, 2009

Direct Volume Rendering

A Volume Rendering "Transfer Function" relates data scalar value to its corresponding color and opacity. For volume rendering, OpenDX uses the color *Value* as the opacity, not the color *Opacity*.

The direct volume rendering part of the Image module will only work in Orthographic projection.

These are the "Transfer Function"

Realization

OSU Oregon State University Computer Graphics mpb - March 6, 2009

3D Cutting Plane – Contours

Realization

OSU Oregon State University Computer Graphics mpb - March 6, 2009

Vector Visualization

OSU Oregon State University Computer Graphics mpb - March 6, 2009

Vector Cloud

Annotation

OSU Oregon State University Computer Graphics mp - March 6, 2009

Streamline Tube

Annotation

OSU Oregon State University Computer Graphics mp - March 6, 2009

Speed Isosurfaces

Annotation

OSU Oregon State University Computer Graphics mp - March 6, 2009

Curl

Transformation

OSU Oregon State University Computer Graphics mp - March 6, 2009

Streamline Ribbon

Realization

OSU Oregon State University Computer Graphics mp - March 6, 2009

Divergence

Transformation

OSU Oregon State University Computer Graphics mp - March 6, 2009