

1

Simple OpenMP



Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu



openmp-simple.pptx






mjb - March 16, 2020





1




OpenMP Multithreaded Programming





2






- OpenMP stands for "Open Multi-Processing"
- It is run by a consortium of companies, labs, and universities
- OpenMP (IMHO) gives you the biggest multithread benefit per amount of work you have to put into using it


























Oregon State University Computer Graphics

mjb - March 16, 2020

2

3


Much of your use of OpenMP will be accomplished by issuing C/C++ "pragmas" to tell the compiler how to build the threads into the executable

#pragma omp directive [clause]

That's it! That's where the compiler comes in.

But, as you are about to find out, doing parallel processing **at all** is not difficult.

The trick is doing parallel processing **well**.
That's where *you* come in.



Oregon State University Computer Graphics

mjb - March 16, 2020


3

Using OpenMP in Linux:

```
g++ -o proj proj.cpp -lm -fopenmp
```

Using OpenMP in Microsoft Visual Studio:

1. Go to the Project menu → Project Properties
2. Change the setting Configuration Properties → C/C++ → Language → OpenMP Support to **"Yes (/openmp)"**



Oregon State University Computer Graphics

mjb - March 16, 2020

4

Threads

5

We will get into more detail pretty soon, but for now, know that a thread is an independent execution path for your code to take.

Threads are at their very best when each one can run on a separate hardware core.



mjb - March 16, 2020

5

Seeing if OpenMP is Supported on Your System:

6

```
#ifndef _OPENMP
    fprintf( stderr, "OpenMP is not supported - sorry!\n" );
    exit( 0 );
#endif
```

How to find out how many cores your system has:

```
int numprocs = omp_get_num_procs( );
```

How to specify how many OpenMP threads you want to reserve starting now:

```
omp_set_num_threads( num );
```

How to use one thread per core:

```
omp_set_num_threads( omp_get_num_procs( ) );
```




mjb - March 16, 2020

6

Creating OpenMP threads for a for loop

7

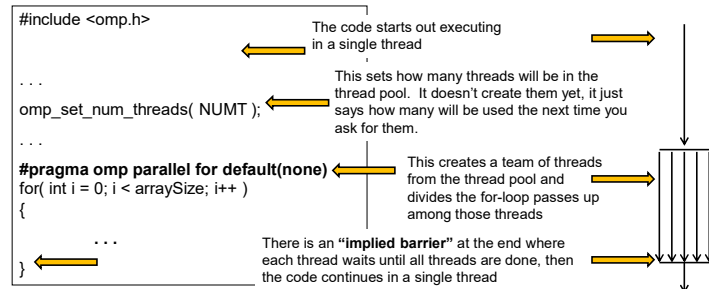

This tells the compiler to parallelize the for-loop into multiple threads. Each thread automatically gets its own personal copy of the variable *i* because it is defined within the for-loop body.

The **default(none)** directive forces you to explicitly declare all variables declared outside the parallel region to be either private or shared while they are in the parallel region. Variables declared within the for-loop statement are automatically private



mjb - March 16, 2020

7