

OpenMP Reduction Case Study: Trapezoid Integration Example




Oregon State
University

Mike Bailey
mjb@cs.oregonstate.edu



Find the area under the curve $y = \sin(x)$
for $0 \leq x \leq \pi$
using the Trapezoid Rule

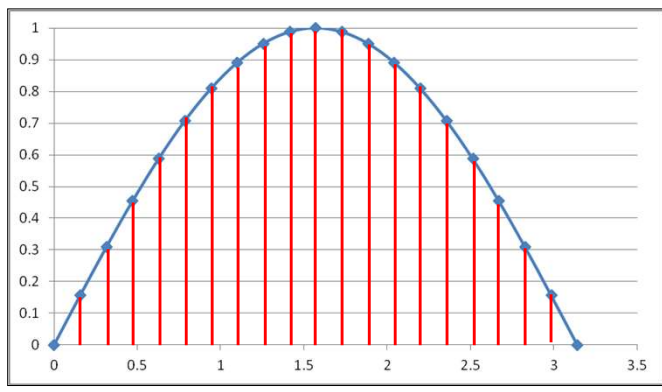

Exact answer: $\int_0^{\pi} (\sin x) dx = -\cos x \Big|_0^{\pi} = 2.0$



Don't do it this way !

3

```
const double A = 0.;
const double B = M_PI;
double dx = ( B - A ) / (float) ( numSubdivisions - 1 );
double sum = ( Function( A ) + Function( B ) ) / 2.;

omp_set_num_threads( numThreads );
#pragma omp parallel for default(none), shared(dx,sum)
for( int i = 1; i < numSubdivisions - 1; i++ )
{
    double x = A + dx * (float) i;
    double f = Function( x );
    sum += f;
}
sum *= dx;
```

- There is no guarantee when each thread will execute this line
- There is not even a guarantee that each thread will finish this line before some other thread interrupts it.



Assembly code:

```
Load sum
Add f
Store sum
```


What if the scheduler decides to switch threads right here?

mjb - March 14, 2024

3

The answer should be 2.0 exactly, but in 30 trials, it's not even close.⁴
And the answers aren't even consistent. How do we fix this?

0.469635	0.398893
0.517984	0.446419
0.438868	0.431204
0.437553	0.501783
0.398761	0.334996
0.506564	0.484124
0.489211	0.506362
0.584810	0.448226
0.476670	0.434737
0.530668	0.444919
0.500062	0.442432
0.672593	0.548837
0.411158	0.363092
0.408718	0.544778
0.523448	0.356299

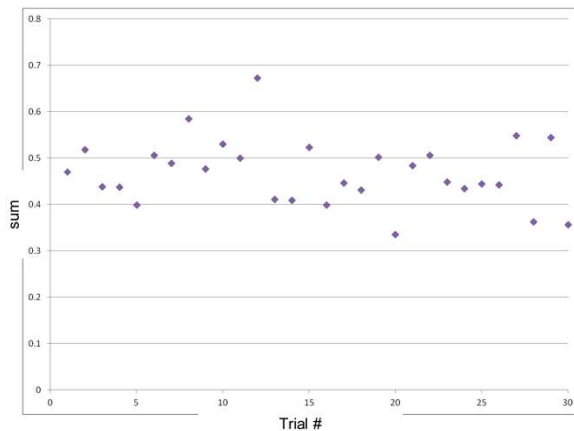

mjb - March 14, 2024

4

There are Three Ways to Make the Summing Work Correctly: #1: Atomic

5

1

```
#pragma omp parallel for shared(dx)
for( int i = 0; i < numSubdivisions; i++ )
{
    double x = A + dx * (float) i;
    double f = Function( x );
    #pragma omp atomic
    sum += f;
}
```

- More lightweight than *critical* (#2)
- Uses a hardware instruction CMPXCHG (compare-and-exchange)
- Can only handle these operations:

x++, ++x, x--, --x
x op= expr , x = x op expr , x = expr op x
where op is one of: +, -, *, /, &, |, ^, <<, >>



Oregon State
University
Computer Graphics

mjb - March 14, 2024

5

There are Three Ways to Make the Summing Work Correctly: #2: Critical

6

2

```
#pragma omp parallel for shared(dx)
for( int i = 0; i < numSubdivisions; i++ )
{
    double x = A + dx * (float) i;
    double f = Function( x );
    #pragma omp critical
    sum += f;
}
```

- More heavyweight than *atomic* (#1)
- Allows only one thread at a time to enter this block of code (similar to a mutex)
- Can have any operations you want in this block of code



Oregon State
University
Computer Graphics

mjb - March 14, 2024

6

There are Three Ways to Make the Summing Work Correctly: #3: Reduction

7

3

```
#pragma omp parallel for shared(dx), reduction(+:sum)
for( int i = 0; i < numSubdivisions; i++ )
{
    double x = A + dx * (float) i;
    double f = Function( x );
    sum += f;
}
```

- OpenMP creates code to make this as fast as possible
- Reduction operators can be: + , - , * , & , | , ^ , && , || , max , min




mjb - March 14, 2024

7

Speed of Reduction vs. Atomic vs. Critical

8

(up = faster)

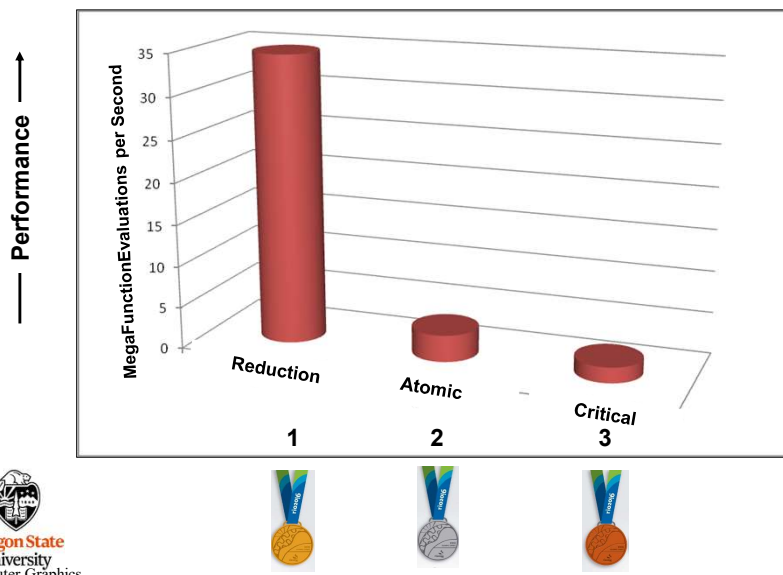

mjb - March 14, 2024

8

So, do it this way !

9

```
const double A = 0.;
const double B = M_PI;

double dx = ( B - A ) / (float) ( numSubdivisions - 1 );

omp_set_num_threads( numThreads );

double sum = ( Function( A ) + Function( B ) ) / 2.;

#pragma omp parallel for default(none),shared(dx),reduction(+:sum)
for( int i = 1; i < numSubdivisions - 1; i++ )
{
    double x = A + dx * (float) i;
    double f = Function( x );
    sum += f;
}

sum *= dx;
```




Oregon State
University
Computer Graphics

mjb - March 14, 2024


9

Two Reasons Why Reduction is so Much Better in this Case

10



```
#pragma omp parallel for shared(dx),reduction(+:sum)
for( int i = 0; i < numSubdivisions; i++ )
{
    double x = A + dx * (float) i;
    double f = Function( x );
    sum += f;
}
```



1. Reduction secretly creates a temporary private variable for each thread's running **sum**. Each thread adding into its own running **sum** doesn't interfere with any other thread adding into *its* own running **sum**, and so threads don't need to slow down to get out of the way of each other.
2. Reduction automatically creates a binary tree structure, like this, to add the N running sums in $\log_2 N$ time instead N time.

Oregon State
University
Computer Graphics

mjb - March 14, 2024

10


O(N) vs. O(log₂N)

11


- Reduction automatically creates a binary tree structure, like this, to add the N running sums in log₂N time instead of N time.



Serial addition:
 Adding 8 numbers requires 7 steps
 Adding 1,048,576 (1M) numbers requires 1,048,575 steps



Parallel addition:
 Adding 8 numbers requires 3 steps
 Adding 1,048,576 (1M) numbers requires 20 steps



mjb - March 14, 2024

11

If You Understand NCAA Basketball Brackets, You Understand Power-of-Two Reduction 12

2021 NCAA DIVISION I WOMEN'S BASKETBALL CHAMPIONSHIP

ALAMO REGION

RIVER WALK REGION

HEMISFAIR REGION

MERCADO REGION

SAN ANTONIO IS TOURNAMENT TOWN

NATIONAL CHAMPION

Source: ESPN

University Computer Graphics

mjb - March 14, 2024

12

Why Not Do Reduction by Creating Your Own *sums* Array, one for each Thread, Like This?

13

```
float *sums = new float [ omp_get_num_threads() ];
for( int i = 0; i < omp_get_num_threads(); i++ )
    sums[ i ] = 0.;

#pragma omp parallel for private(myPartialSum),shared(sums)
for( int i = 0; i < N; i++ )
{
    myPartialSum = ...

    sums[ omp_get_thread_num( ) ] += myPartialSum;
}

float sum = 0.;
for( int i = 0; i < omp_get_num_threads(); i++ )
    sum += sums[ i ];

delete [ ] sums;
```

- This seems perfectly reasonable, it works, and it gets rid of the problem of multiple threads trying to write into the same reduction variable.
- But the reason we don't do this is that this method provokes a problem called **False Sharing**. We will get to that when we discuss caching.



13